





ROHS

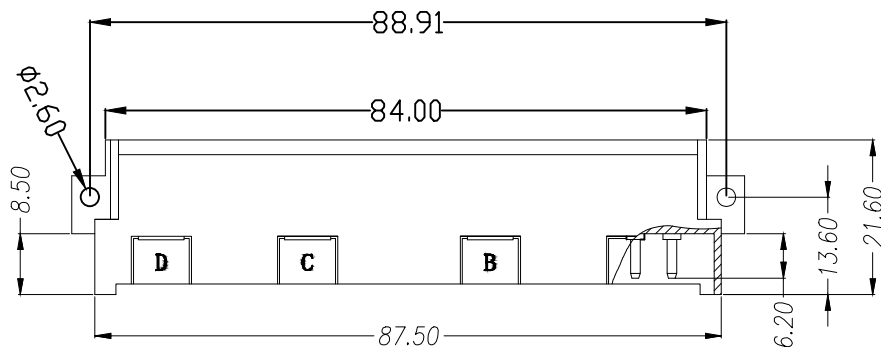


### SPECIFICATION

Current Rating: 5.6Amp  
 Insulation Resistance: 1000M $\Omega$  min.at DC 500V  
 Contact Resistance: 20m $\Omega$  max  
 Withstand Voltage: AC 1000V For 1 Minute  
 Operating Temperature: -55 $^{\circ}$  C to +105 $^{\circ}$  C  
 Contact Material: Phosphor Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: PBT+30%GF UL 94V-0  
 Insertion Force: 75N max.  
 Withdrawal Force: 0.15N min. per individual contact

Ordering Code:

DMR - XX - X - X - X - D01  
 ① ② ③ ④ ⑤ ⑥

- ① Series No:
- ② No. of Contacts  
48P 32P
- ③ Termination  
B: Right angle tail length, H=3.5mm
- ④ Rows Loaded With Contacts  
G: Row d+b+z  
I: Row d+z
- ⑤ Contact Plating  
G0: Gold flash  
S0: Gold flash/Ni  
G1: 3u" Gold  
S1: 3u" Gold/Ni  
G2: 5u" Gold  
S2: 5u" Gold/Ni  
G3: 10u" Gold  
S3: 10u" Gold/Ni  
G4: 15u" Gold  
S4: 15u" Gold/Ni  
G5: 30u" Gold  
S5: 30u" Gold/Ni  
SN: Tin
- ⑥ Series number  
D01

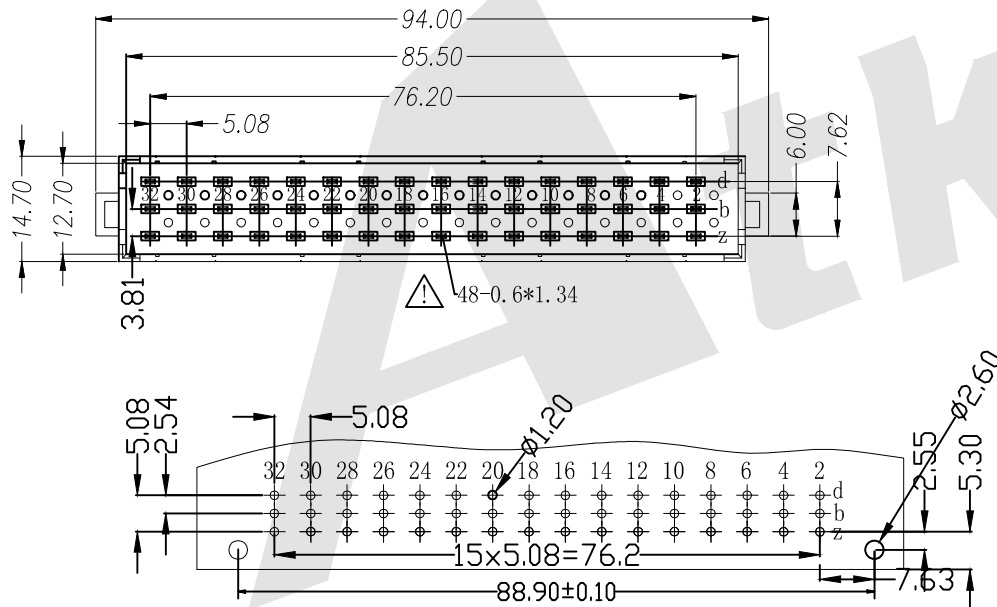

Recommended P. C. B. Layout

Code	Number Of Contacts	Contact Arrangement	Rows With Contacts	Pitch
G	48		d b z	5.08
I	32		d z	

Unless Otherwise specified tolerance  
 X.  $\pm 0.35$  X. XX:  $\pm 0.20$   
 X. X:  $\pm 0.25$  X. XXX:  $\pm 0.15$

**Atkconn**® ATKCONN ELECTRONICS CO., LTD  
[Http://www.atkconn.com](http://www.atkconn.com)

SCALE: As Shown UNIT: mm  
 DRAW ZLA DATE 25/04/2022  
 CHECK BobYang DATE 25/04/2022

TITLE: DIN41612 Right Plug F Type High Power Connectors 48 Positions Standard Terminal Width 1.34mm

DRAWING NO: DMR-XX-XXX-D01

PRODUCT NO: DMR-XX-XXX-D01



REV	DESCRIPTION	DATE