



RoHS





SPECIFICATION

Current Rating:7 Amp
 Insulation Resistance:1000M ohms min
 Contact Resistance:20M ohms max
 Dielectric Withstanding:AC500V
 Operating Temperature:-65° C to +125° C
 Contact Material:Brass
 Insulator Material:LCP,UL 94V-0 Black

Ordering Code:

PHIS01 - $\frac{X}{1}$ - $\frac{X}{2}$ - $\frac{S}{3}$ - $\frac{A-B}{4}$ - $\frac{X}{5}$ - $\frac{X}{6}$ - $\frac{X}{7}$

- ① Series No:
- ② No. of Contacts
02 To 40
- ③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
- ④ Connector Type
D:Double
- ⑤ Pin Length:
A:1150=11.50mm
B:0320=3.20mm
Please mark the desired length in the A/B
- ⑥ Insulator Material
B:PA6T
C:LCP
E:PA9T
- ⑦ Packing:
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

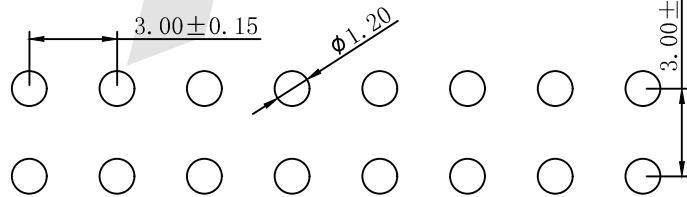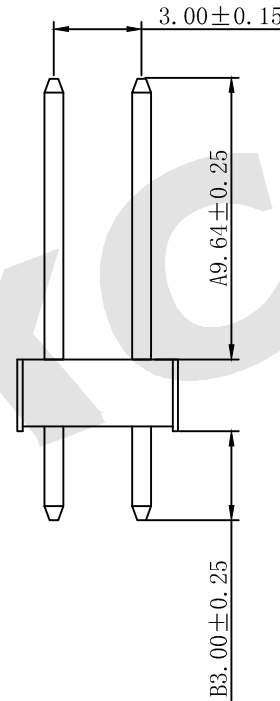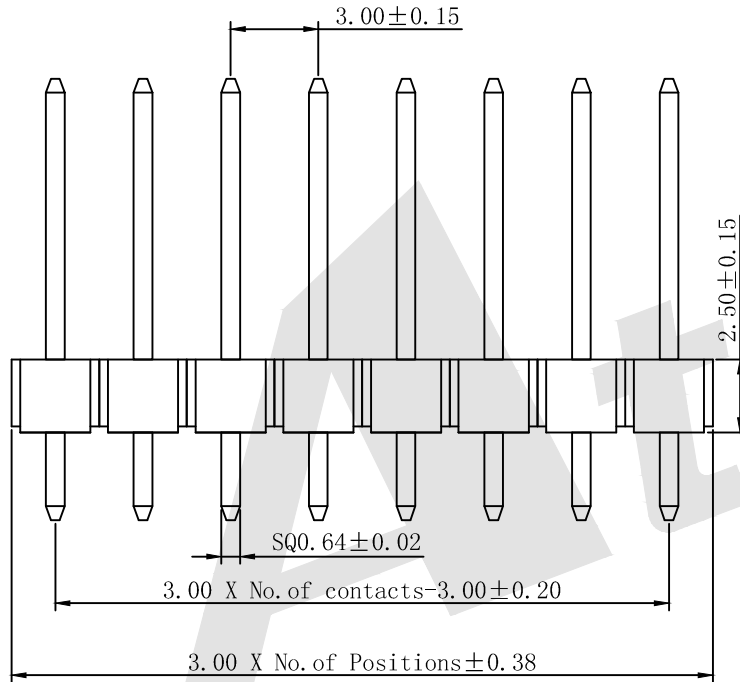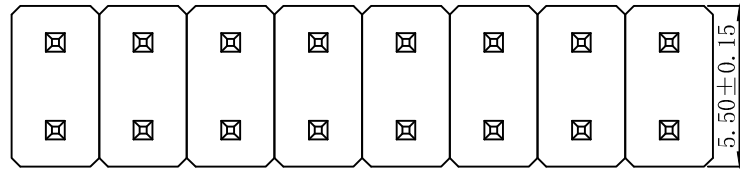

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Atkconn® ATKCONN ELECTRONICS CO., LTD
[Http://www.atkconn.com](http://www.atkconn.com)

| | |
|--------------------|--------------------|
| SCALE: As Shown | UNIT: mm |
| DRAW ZLA | DATE 24/04/2022 |
| CHECK BobYang | DATE 24/04/2022 |

TITLE: 3.0 Pin Header DUAL ROW STRAIGHT TYPE

DRAWING NO: PHIS01-XXS-A-B-XX
 PRODUCT NO: PHIS01-XXS-A-B-XX



| REV | DESCRIPTION | DATE |
|-----|-------------|------|
| | | |