

ComFi BL80

**High Performance WiFi5 Dual Band High Power
Indoor Wireless AP**

Product Specifications



- 1200Mbps Dual Band Wi-Fi5 Indoor Access Point
- 2.4GHz and 5GHz 802.11AC Wave2 Technology
- Two Full Gigabit Ethernet Port
- Standard PoE Power Supply / DC Supply (Optional)
- FIT and FAT AP Mode, Adjustable TX Power, 100+ users

Product Description

ComFi BL80 is an Indoor Dual Band Wi-Fi5 802.11AC Wireless Access Point which suitable for indoor environment use that require high speed performance wireless coverage such as commercial office building, school, hospital, hotel, etc. ComFi BL80 supports 2x2 802.11ac Wave2 MIMO, and the maximum concurrent connection rate (Dual band) can reach up to 1200Mbps, which can build a stable and high speed wireless network for users.

ComFi BL80 has high performance wireless characteristics that can get a larger wireless coverage area and better wall penetration performance. ComFi BL80 support wireless access up to hundreds of wireless terminals, and meet the wireless application of high density wireless terminals.

ComFi BL80 has also good compatibility and supports the access of most wireless terminals on the market. Users can use mobile phones, tablets or laptops to easily connect.

ComFi BL80 supports integrated with OpenWrt development platform. For teams with software development capabilities but lack of hardware platforms, ComFi BL80 is a very good choice if they want to develop their own wireless 11ac MIMO AP. Users can quickly and easily develop upper-layer applications according to specific needs to create their own unique wireless AP products.

ComFi BL80 supports standard 48V PoE power supply and ceiling installation. The installation and configuration are flexible and convenient. Users only need to spend a short time to do and complete the settings then can enjoy the fun of surfing the Internet.

Product Features


- Support ceiling or wall mounting method indoor use.
- Support 2.4GHz 2x2 Wi-Fi (802.11b/g/n), up to 300Mbps data speed rate.
- Support 5GHz 2x2 Wi-Fi (802.11a/n/ac), up to 867Mbps data speed rate.
- Support Hardware Watchdog provides device auto-recovery and low human maintenance.
- 2 x RJ45 1GbE Ethernet Port and WAN Port support 802.at PoE (PD)
- Support two power input methods Standard 48V PoE and DC 12V.
- Elegant Design Casing, Hidden Wire Installation.

Hardware Specifications

Model	BL80
Dimension	168mm x 168mm x 32mm (L x W x H)
Weight	TBD
Installation	Wall / Ceiling Mountable Installation
LED Indicators	Multi-color LED indicator, SYS (Red), 2.4GHz (Green), 5GHz (Blue)
Interfaces	1 x 10/100/1000Mbps Uplink RJ45 Port, Auto Adaptive, MDI/X, Support 802.3af Power Supply 1 x 10/100/1000Mbps RJ45 LAN RJ45 Port, Auto Adaptive, MDI/X 1 x Factory Reset Button (Long press 6-10sec to activate reset to default factory settings)
PoE	48V / 0.5A
DC	12V / 1A
ESD	±6KV
Power Consumption	< 10W
Environment	
Operating Temperature	-20°C to +45°C
Storage Temperature	-40°C to +70°C
Operating Humidity	5% - 95% (non-condensing)
Air Pressure	86kPa ~ 106kPa Altitude
IP Rating	IP20
Stability	
Annual Failure Rate	AFR < 1.5% (Continuous Operation Status)
Chipset Solution	
CPU	MediaTek MT7621A + MT7615D + PA (200mW)
Flash	16MB SPI NOR Flash
RAM	128MB DDR2 Memory
Wi-Fi Characteristics	
Wi-Fi Standard	IEEE 802.11a/b/g/n/ac
Working Frequency	2.4GHz Radio: 2.4GHz ~ 2.4835GHz
	5GHz Radio: 5.150GHz~5.850GHz

Max. Tx Power	2.4GHz @ < 20dBm 5GHz @ < 23dBm
Max. Data Rate (2.4GHz)	300Mbps
Max. Data Rate (5GHz)	867Mbps
Max. WiFi Connection	100+
2.4GHz Antenna	2 x Omni-directional Antenna, 5dBi
5GHz Antenna	2 x Omni-directional Antenna, 4DBi

Product Views

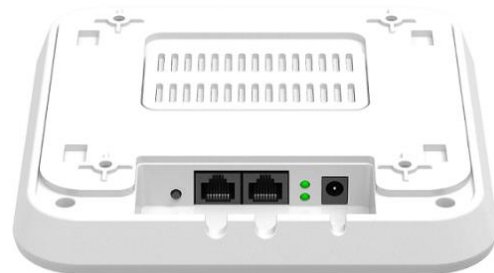

Order Information

Product Model	Product Description
ComFi BL80	Complete Product Unit including 1 x 48V PoE Power Supply (Optional) / 12VDC Power Adapter (Optional) 1 x Mounting Panel 1 x Network Cable 1 x User Manual (Optional) 4 x Mounting Screws

To see more MovingComm products,

Visit:-

Movingcomm official website <http://www.movingcomm.com/en>

Movingcomm Alibaba global site: <https://movingcomm.en.alibaba.com>

INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH MOVINGCOMM PRODUCTS. NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN MOVINGCOMM'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, MOVINGCOMM ASSUMES NO LIABILITY WHATSOEVER, AND MOVINGCOMM DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO SALE AND/OR USE OF MOVINGCOMM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. UNLESS OTHERWISE AGREED IN WRITING BY MOVINGCOMM, THE MOVINGCOMM PRODUCTS ARE NOT DESIGNED NOR INTENDED FOR ANY APPLICATION IN WHICH THE FAILURE OF THE MOVINGCOMM PRODUCT COULD CREATE A SITUATION WHERE PERSONAL INJURY OR DEATH MAY OCCUR.

MovingComm may make changes to specifications and product descriptions at any time, without notice. Buyers must receive a confirmation from MovingComm prior using the product. MovingComm shall have no responsibility whatever for conflicts or incompatibilities arising from future changes to them.

Copyright © 2013-2022 Shenzhen MovingComm Technology Co., Ltd. All rights reserved.

深圳星恒讯科技有限公司

SHENZHEN MOVINGCOMM TECHNOLOGY CO., LTD.

Addr: 4F, No. 5 Building, TongFuKang ShuiTian Industrial Zone,
ChangCheng Road, ShuiTian Community, ShiYan, BaoAn
District, 518108 ShenZhen, GuangDong, China

Tel: 86-755-23125215

Fax: 86-755-23125215-802

Email: sales@movingcomm.com

