


PIN OUT

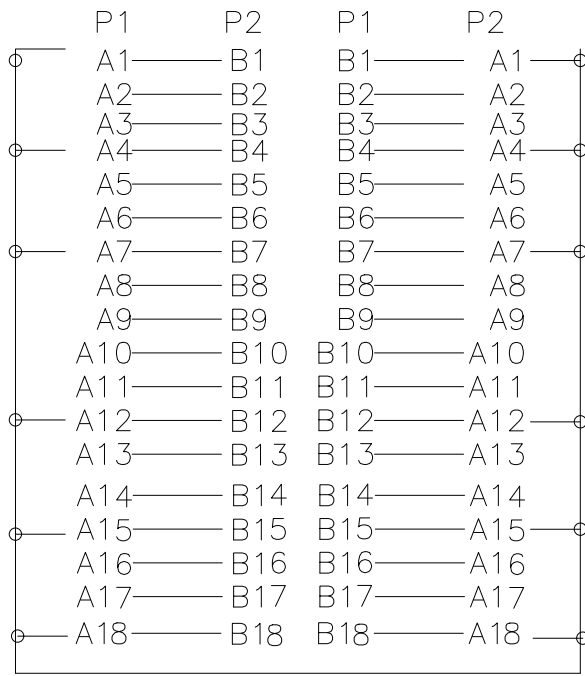

NOTE:  
 1.100%OPEN&SHORT TESTIGN,  
 2.INSULATION RESISTANCE 10M Ohm MIN DC300V  
 3.CONDUCTIVE RESISTANCE: 2 Ohm MAX

8	LATCH	AQ-3-MS21008	STAINLESS STEEL	2	pcs									
7	EXPANDO	AQ-3-MS76001	PET BALCK OD: 10mm	A/R	mm	A	INITIAL RELEASE			12/10/12				
6	ACETATE TAPE	AQ-3-MS77001	W=25±5mm,BLACK	25	mm	REV	DESCRIPTION OF CHANGE			DATE				
5	MOLDING	AQ-3-GL100101	LDPE,NATURAL	7.5	g	TOLERANCE INCHES MM			<b>DIKWAN®</b> DONGGGUAN AIQUN INDUSTRIAL CO.,LTD.					
4	MOLDING	AQ-3-GL100401	PBT+30GF% BLACK	8	g	.X	.015	.30						
3	PCBA	AQ-3-MS31019	MINI SAS 36PIN PCB, PIN:15u" Au, 105±10 ohm	2	PCS	.XX	.010	.10						
2	CABLE	AQ-3-MS40101	30AWG CABLE,	A/R	mm	.XXX	.005	.05	SCALE	NONE		REV	A	
1	CABEL	AQ-3-MS40208	<30AWG*2C+2D>AL+MYLAR,OD:0.97*2.17MM,SAS3.0 100±5 ohm.	A/R	mm	DRAWN BY	TONY CHAN		UNIT	MM		SHEET	1/1	CUSTOMER:
						CHECK BY			DATE	16/04/10	DWG NO:			TITLE: MINI SAS 36P TO 36P SE
NO.	PART NAME	PART NO.	SPEC DESCRIPTION	QT'Y	UNIT	CUSTOMER P/N:		P/N: AQ-1-MS111S10500						