


PIN ASSIGNMENT:

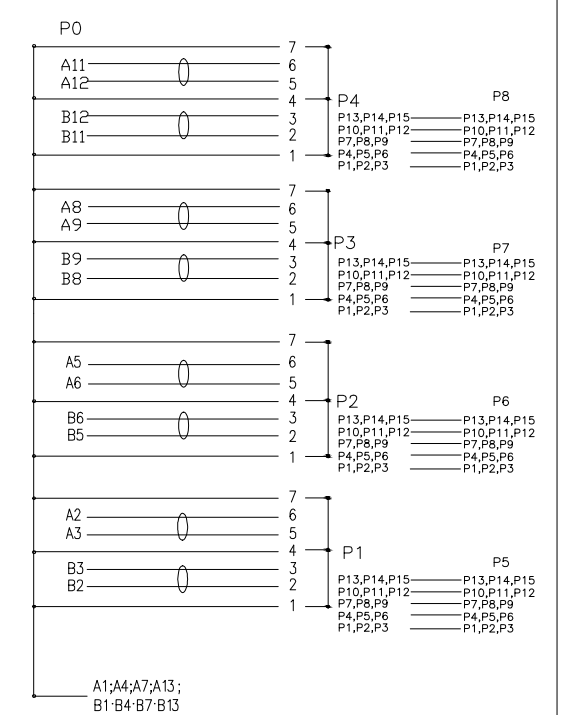

NOTE:  
 1.100%OPEN&SHORT TESTIGN,  
 2.INSULATION RESISTANCE 10M Ohm MIN DC300V  
 3.CONDUCTIVE RESISTANCE: 2 Ohm MAX

NO.	PART NAME	PART NO.	SPEC DESCRIPTION	QTY	UNIT
9	LABLE	AQ-5-MS5039	W6*L24, PRINT *P1&P2&P3&P4*	4	pcs
8	CONN.	AQ-3-GL51S02	SATA 15P/M,PIN/G/F	4	pcs
7	CONN.	AQ-3-GL51S01	SAS 29P/F,PIN/G/F	4	pcs
6	ACETATE TAPE	AQ-3-MS77001	W=25±5mm,BLACK	2	pcs
5	MOLDING	AQ-3-GL145201	45P PVC BLACK	A/R	9
4	MOLDING	AQ-3-GL100101	LDPE,NATURAL	A/R	9
3	ASSEMBLY PARTS	AQ-3-MS62001	ASSEMBLY PARTS (Zinc ALLOY HOODS, HOOK,PULL-TAB, RUBBER RING)	1	set
2	PCB	AQ-3-MS31021	MINI SAS 26P PCBA, PIN,15u Au, 100±10 Ohm	1	pcs
1	CABLE	AQ-3-MS41602	<28AWG*2C+D+HMAM+HM>*8C+M+AM+B,DD:7.5±0.15MM,BLACK PVC 100±5 Ohm	A/R	m

A	INITIAL RELEASE		12/10/12	
REV	DESCRIPTION OF CHANGE		DATE	
TOLERANCE				
INCHES			MM	
.X	.015	.30		
.XX	.010	.10		
.XXX	.005	.05		
DRAWN BY	TONY CHAN		SCALE	NONE
CHECK BY			UNIT	MM
CUSTOMER P/N:			P/N: AQ-1-MS254Y12000	