


NOTE:
 1.100%OPEN&SHORT TESTIGN,
 2.INSULATION RESISTANCE 10M Ohm MIN DC300V
 3.CONDUCTIVE RESISTANCE: 2 Ohm MAX

PIN OUT

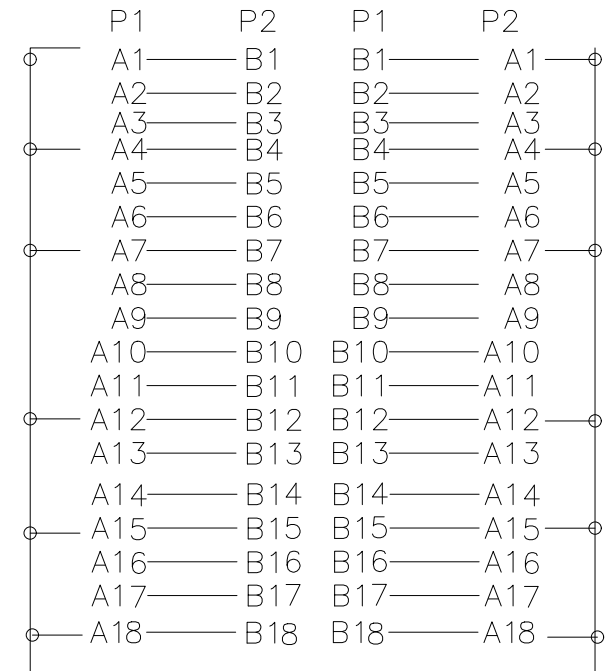

8	LATCH	AQ-3-MS21008	STAINLESS STEEL	2	pcs					
7	EXPANDO	AQ-3-MS76001	PET BALCK OD: 10mm	A/R	mm	A	INITIAL RELEASE		12/10/12	
6	ACETATE TAPE	AQ-3-MS77001	W=25±5mm,BLACK	25	mm	REV	DESCRIPTION OF CHANGE			DATE
5	MOLDING	AQ-3-GL100101	LDPE,NATURAL	7.5	g	TOLERANCE INCHES MM			DIKWAN [®] DONGGUAN AIQUN INDUSTRIAL CO.,LTD.	
4	MOLDING	AQ-3-GL100401	PBT+30GF% BLACK	8	g	.X	.015	.30		
3	PCBA	AQ-3-MS31019	MINI SAS 36PIN PCB, PIN:15u" Au, 105±10 ohm	2	PCS	.XX	.010	.10		
2	CABLE	AQ-3-MS40101	30AWG CABLE,	A/R	mm	.XXX	.005	.05	SCALE	NONE
1	CABEL	AQ-3-MS40208	(30AWG*2C+2D)AL+MYLAR,OD:0.97*2.17MM,SAS3.0 100±5 ohm。	A/R	mm	DRAWN BY	TONY CHAN		UNIT	MM
						CHECK BY			SHEET	1/1
									DATE	16/04/10
									CUSTOMER:	
									DATE	16/04/10
									DWG NO:	
									TITLE:	MINI SAS 36P TO 36P
NO.	PART NAME	PART NO.	SPEC DESCRIPTION	QT'Y	UNIT	CUSTOMER P/N:		P/N: AQ-1-MS111010500		