


ZFS-L20系列 多路换向阀

● 用途与特征 APPLICATION AND FEATURES

ZFS-L20系列多路换向阀是由进油体、回油体和换向阀体组合而成。它具有结构紧凑、工作压力高、性能可靠等特点。此阀最大特点是改用了直动式安全阀，解决了以往先导式安全阀容易堵死的缺点，使得多路阀的抗污性大大提高。广泛应用于叉车、装载机、挖掘机、起重机、压路机等工程机械及矿山、轻工、环卫、农机等行业。用以改变液流方向，实现多个执行机构的集中控制。本公司生产1到12路

ZFS-L20 series multiple directional control valve consists of inlet body, oil returned body and inverting valve body. It has such characteristics as tight structure, high working pressure and reliable working performance. The main characteristic is to change pilot safety valve into direct-acting safety valve in case of blocking and to improve the resistant-contamination. This kind of valve is widely used in engineering machinery, mining, light industry, environmental and agricultural machinery, such as forklift, loading trucks, excavators, cranes and road rollers. It's used to change flow direction and to achieve the integrated control over several executive mechanism. It may be fixed with double operational hand shank, which is convenient for users. valves combination, 1-12 lever

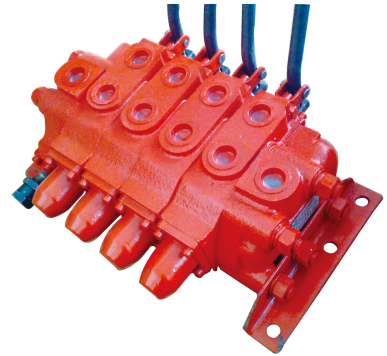

● 型号说明 MODEL CODING

ZFS	-	L20	E	-	×	T	-	×
①		②	③		④	⑤		⑥

- ① 产品代号 Unit code
- ② 公称通径 Nominal size 20 mm 流量 Nominal flow rate 100 (L / min)
- ③ 压力等级 Pressure grade E: 16MPa F: 20MPa 最大压力 (MPa) Max. Pressure 25
- ④ 工作联数 job number
- ⑤ 复位方式 Spool returning T: 弹簧复位 Spring W 钢球定位 (Steel ball positioning)
- ⑥ 滑阀机能 Spool function A O Y

● 外形图 OUTLINE DIMENSIONS

