

ZL15/20/25 (长江型) 系列 多路阀

● 用途与特征 APPLICATION AND FEATURES

ZL×多路换向阀是由多个换向阀和安全阀及各种附加阀组合而成。它具有工作压力高、结构紧凑、安全阀性能好、可靠性高、不易外漏、通用性好等特点。它主要用于40以下装载机及多功能装载机、小型挖掘机等工程机械的液压系统中，也用于起重运输机械、矿山机械、农业机械或其它机械的液压系统中，实现多个执行机构的集中控制。本公司生产1到14路

It may be combined random. The directional change level has two installing ways for different operation. The valve is used parallel connection oil route It has pressure releasing outlet to connect other hydraulic components to provide power source. The sealing is specially designed with good sealing. The valve is widely used in the hydraulic system of forklift environment vehicle and light loading machines. valves combination,1-14



● 型号说明 MODEL CODING

ZL	*	H	-	0	3	T	M	4	W	-	J
①	②	③		④	⑤	⑥	⑦	⑧	⑨		⑩

①产品代号Unit code

②公称通径Nominal diameter 15 mm流量Nominal flow rate 65 (L/min)

Nominal diameter 20 mm流量Nominal flow rate 100 (L/min)

Nominal diameter 25 mm流量Nominal flow rate 160 (L/min)

③压力等级Pressure grade E: 16 MPa F: 20 MPa G: 25 MPa H: 31.5 MPa

④⑦换向体中位机能Spool Function A O Y Q

⑤⑧A B口辅助阀 3表示B口带过载阀 4表示AB口带过载阀

A B Aided valve 3 Say B overload. 4 Say A B overload.

⑥⑨复位方式Spool returning T: 弹簧复位Spring W钢球定位Steel ball positioning


Q: 气动复位Pneumatic U: 液压控制Hydraulic pressure

⑩省略为正常型号 Normal type带“J”为带压力输出 Output with pressure

注：订货时有特殊要求者，请与技术部联系。

Notes: Please contact with technical department if user has any special requirements

● 外形图 OU-TLINE DIMENSIONS

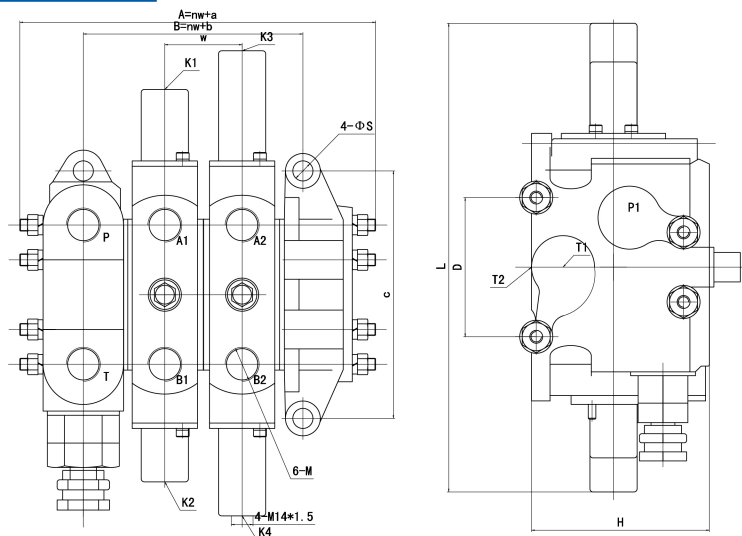

型号	A	B	a	b	W	C	D	H	S	M	L
ZL15	nw+a	nw+b	130	42	50	160	90	115	13	M22×1.5	251
ZL20			140	45	60	174	100	133	13	M27×2	282
ZL25			170	54	70	210	118	152	17	M33×2	335