

# SPECIFICATION FOR APPROVAL

Preliminary Specification

Final Specification

**MODEL NAME : RS750EGY-ND20**

**APPROVED BY**

---

**REVIEWED BY**

---

**PREPARED BY**

Lion / Engineer

---

## 1. General Description

This specification applies to the 74.52 inch Color TFT-LCD Module RS750EGY. This LCD module has a TFT active matrix type liquid crystal panel 3840x2160 pixels, and diagonal size of 74.52 inch.

It is intended to support displays where high brightness, wide viewing angle.

### \* General Information

Items	Specification	Unit	Note
Active Screen Size	74.52 inches diagonal	inch	
Display Area	1649.664 (H) *927.936(V)	mm	
Outline Dimension	1684.7 (H) *970.4(V)*64.8(D)	mm	D:MAX
Driver Element	a-Si TFT Active Matrix		
Display Colors	10-bit(D), 1.07B	colors	
Number of Pixels	3840 horiz. by 2160 vert	pixel	
Pixel Arrangement	RGBW Vertical strip		
Display Mode	Transmissive mode, Normally black		
Surface Treatment	Hard coating(2H), Anti-glare low reflection treatment of the front polarizer (Haze 3%(Typ.))		
Interface	V-by-One 8 lane		
Brightness	2000	nits	
Weight	31	kg	

## 2. Absolute Maximum Ratings


The followings are maximum values which, if exceeded, may cause faulty operation or damage to the unit.

Item	Symbol	Min	Max	Unit	Note
Logic/LCD Drive Voltage	Vcc	-0.3	14	[Volt]	1
Input Voltage of Signal	Vin	-0.3	4	[Volt]	1
Operating Temperature	TOP	0	+50	[°C]	2
Operating Humidity	HOP	10	90	[%RH]	2
Storage Temperature	TST	-20	60	[°C]	2
Storage Humidity	HST	10	90	[%RH]	2
Panel Surface Temperature	PST		68	[°C]	3

Note 1: Duration:50 msec.

Note 2 : Maximum Wet-Bulb should be 39°C and No condensation. The relative humidity must not exceed 90% non-condensing at temperatures of 40°C or less. At temperatures greater than 40°C, the wet bulb temperature must not exceed 39°C.

Note 3: Surface temperature is measured at 50 °C Dry condition.

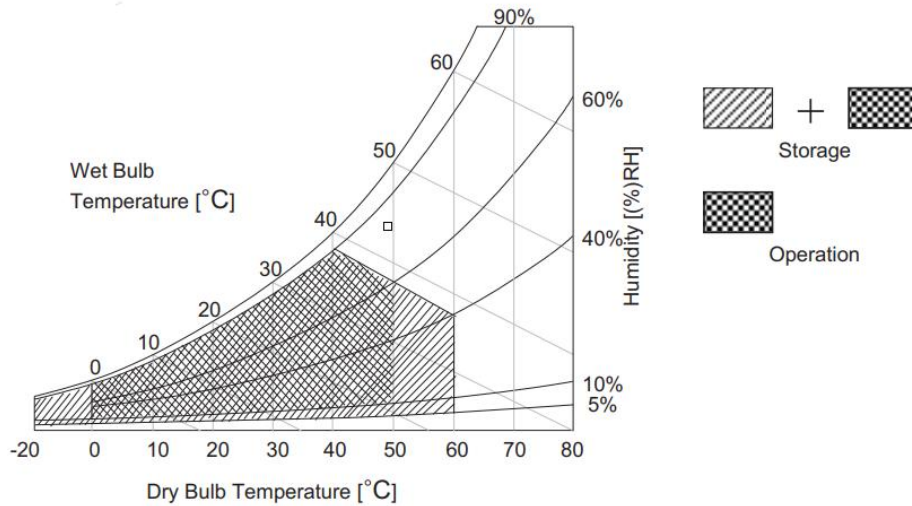

### 3. Electrical Specification

#### 3-1 TFT LCD Module

##### 3-1-1 Power Specification


Item		Symbol	Vaule			Unit	Note
			Min	TYP	Max		
Power Input Voltage		VLCD	10.8	12	13.2	VDC	
Power Input Current		ILCD	-	1350	1755	mA	1
			-	1950	2535	mA	2
T-CON Option	Input High Voltage	VIH	2.7	-	3.6	VDC	
U-Selection Voltage	Input Low Voltage	VIL	0	-	0.7		
Power Consumption		PLCD	-	16.2	21	Walt	1
			-	23.4	30.4	Walt	2
Rush current			-	-	10	A	3

Note


1. The specified current and power consumption are under the VLCD=12.0V, Ta=25°C, fV=60Hz condition, and mosaic pattern(8 x 6) is displayed and fV is the frame frequency.
2. The current is specified at the maximum current pattern.
3. The duration of rush current is about 2ms and rising time of power input is 0.5ms (min.).
4. Ripple voltage level is recommended under ·5% of typical voltage .

**White : 1023 Gray**

**Black : 0 Gray**

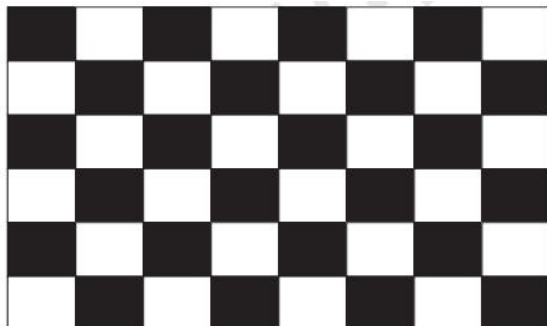

**Mosaic Pattern(8 x 6)**

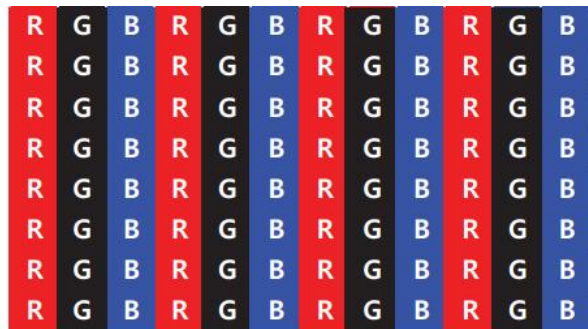

**Max Current Pattern**

### 3-2. Interface Connections


This LCD module employs two kinds of interface connection, 51-pin connector is used for the module electronics.

#### 3-2-1. LCD Module

- LCD Connector(CN1): 20037WR-H05 (manufactured by YEONHO)

**Table 3-1. MODULE CONNECTOR(CN1) PIN CONFIGURATION**

PIN NO	Symbol	Description	Note
1	GND	Ground	
2	GND	Ground	
3	VLCD	Power Supply +12.0V	
4	VLCD	Power Supply +12.0V	
5	VLCD	Power Supply +12.0V	

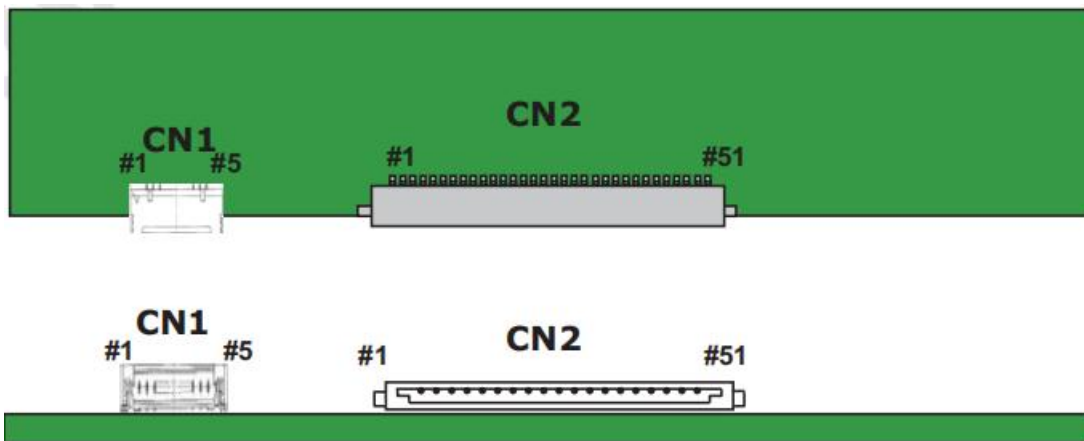

- LCD Connector(CN2): FI-RXE51S-HF(manufactured by JAE)/ GT05S-51S-H38(manufactured by LSM)  
IS050-C51B-C39-C(manufactured by UJU)

PIN NO	Symbol	Description	PIN	Symbol	Description
1	VLCD	Power Supply +12.0V	27	GND	Ground
2	VLCD	Power Supply +12.0V	28	Rx0n	V-by-One HS Data Lane 0
3	VLCD	Power Supply +12.0V	29	Rx0p	V-by-One HS Data Lane 0
4	VLCD	Power Supply +12.0V	30	GND	Ground
5	VLCD	Power Supply +12.0V	31	Rx1n	V-by-One HS Data Lane 1
6	VLCD	Power Supply +12.0V	32	Rx1p	V-by-One HS Data Lane 1
7	VLCD	Power Supply +12.0V	33	GND	Ground
8	VLCD	Power Supply +12.0V	34	Rx2n	V-by-One HS Data Lane 2
9	NC	No Connection	35	Rx2p	V-by-One HS Data Lane 2
10	GND	Ground	36	GND	Ground
11	GND	Ground	37	Rx3n	V-by-One HS Data Lane 3
12	GND	Ground	38	Rx3p	V-by-One HS Data Lane 3
13	GND	Ground	39	GND	Ground
14	PWM TIN	External VBR (From System)	40	Rx4n	V-by-One HS Data Lane 4
15	PWM	External VBR (For System)	41	Rx4p	V-by-One HS Data Lane 4
16	Mplus Mode 0	Input Data Format [1:0] '00' :Low Power, '01' :High Luminance '10' :High Luminance II, '11' :HDR Mode	42	GND	Ground
17	Mplus Mode 1	Available Mode HDR_EN : L '00' , '01' , '10' HDR_EN : H '11'	43	Rx5n	V-by-One HS Data Lane 5
18	SDA	SDA (For I <sup>2</sup> C)	44	Rx5p	V-by-One HS Data Lane 5
19	SCL	SCL (For I <sup>2</sup> C)	45	GND	Ground
20	NC	No Connection	46	Rx6n	V-by-One HS Data Lane 6
21	HDR_EN	'H' : On, 'L' or NC : Off	47	Rx6p	V-by-One HS Data Lane 6
22	NC	No Connection	48	GND	Ground
23	AGP or NSB& M+ Bypass	'H' : AGP M+ bypass 'L' or NC :NSB(No Signal Black), M+ Enable	49	Rx7n	V-by-One HS Data Lane 7
24	MSE	'L' or NC : off, 'H' on	50	Rx7p	V-by-One HS Data Lane 7
25	HTPDN	Hot plug detect	51	GND	Ground
26	LOCKN	Lock detect			

**NOTE:**

1. All GND (ground) pins should be connected together to the LCD module's metal frame.
2. All Input levels of V-by-One signals are based on the V-by-One HS Standard Version 1.4.
3. #9 & #20 & #22 : These pins are used only for LGD (Do not connect)

## 4. Backlight Electrical Specification

### 4-1 Electrical Specification

Parameter		Symbol	Values			Unit	Notes	
			Min	Typ	Max			
Power Supply Input Voltage		VBL	22.5	24	25.6	Vdc		
Power Supply Input Current		IBL		14.67		A		
Power Consumption (Total)		PBL		352		W	MAX	
Input Voltage for Control System Signals	On/Off	On	Von	2		5	Vdc	
		Off	Voff	0		0.5	Vdc	
	Brightnes Adjust	EXTVBR-B	40			100	%	Automatic light sensitive control
Life Time				30000	50000		Hrs	1

**Note1:**

The life time is determined as the time at which brightness of the LED is 50% compared to that of initial value at the typical LED current on condition of continuous operating at  $25 \pm 2^{\circ}\text{C}$ , based on Brightest state.

## 4-2 Input Pin Assignment

### 4-2-1 LED DB connector

CN1:CI0114M1HRL-NH(CviLux) or equivalent

CN2:CI0112M1HRL-NH(CviLux) or equivalent

CN1	Symbol	Description	CN2	Symbol	Description
1	VCC	Power Supply Voltage	1	VCC	Power Supply Voltage
2	VCC	Power Supply Voltage	2	VCC	Power Supply Voltage
3	VCC	Power Supply Voltage	3	VCC	Power Supply Voltage
4	VCC	Power Supply Voltage	4	VCC	Power Supply Voltage
5	VCC	Power Supply Voltage	5	VCC	Power Supply Voltage
6	GND	Power ground	6	GND	Power ground
7	GND	Power ground	7	GND	Power ground
8	GND	Power ground	8	GND	Power ground
9	GND	Power ground	9	GND	Power ground
10	GND	Power ground	10	GND	Power ground
11	NC	Not connect	11	NC	Not connect
12	N/F	Backlight ON/OFF control	12	NC	Not connect
13	NC	Not connect			
14	NC	Not connect			

CN3 : PH1.25-2PIN (1.25mm\*2) Light sensor connector

CN2	Symbol	Description
1	G+	Light sensor anode
2	G-	Light sensor cathode

**NOTE**

1. One screen only needs one N / F signal
2. One screen only needs to be connected to a light sense



## 5. Mechanical Characteristics

UNIT:mm

