




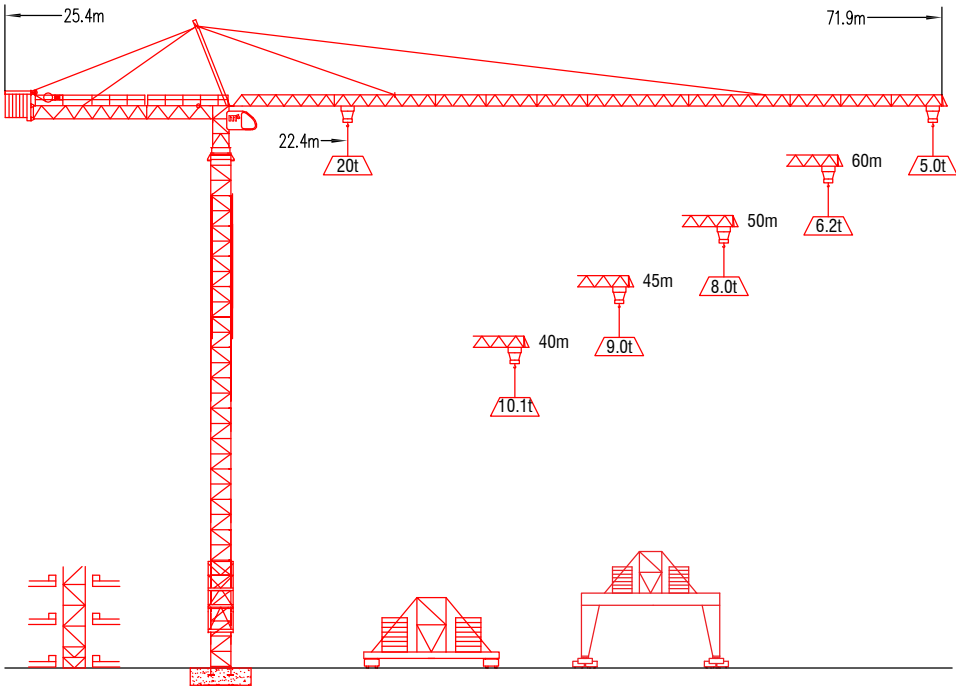

MAST SECTION

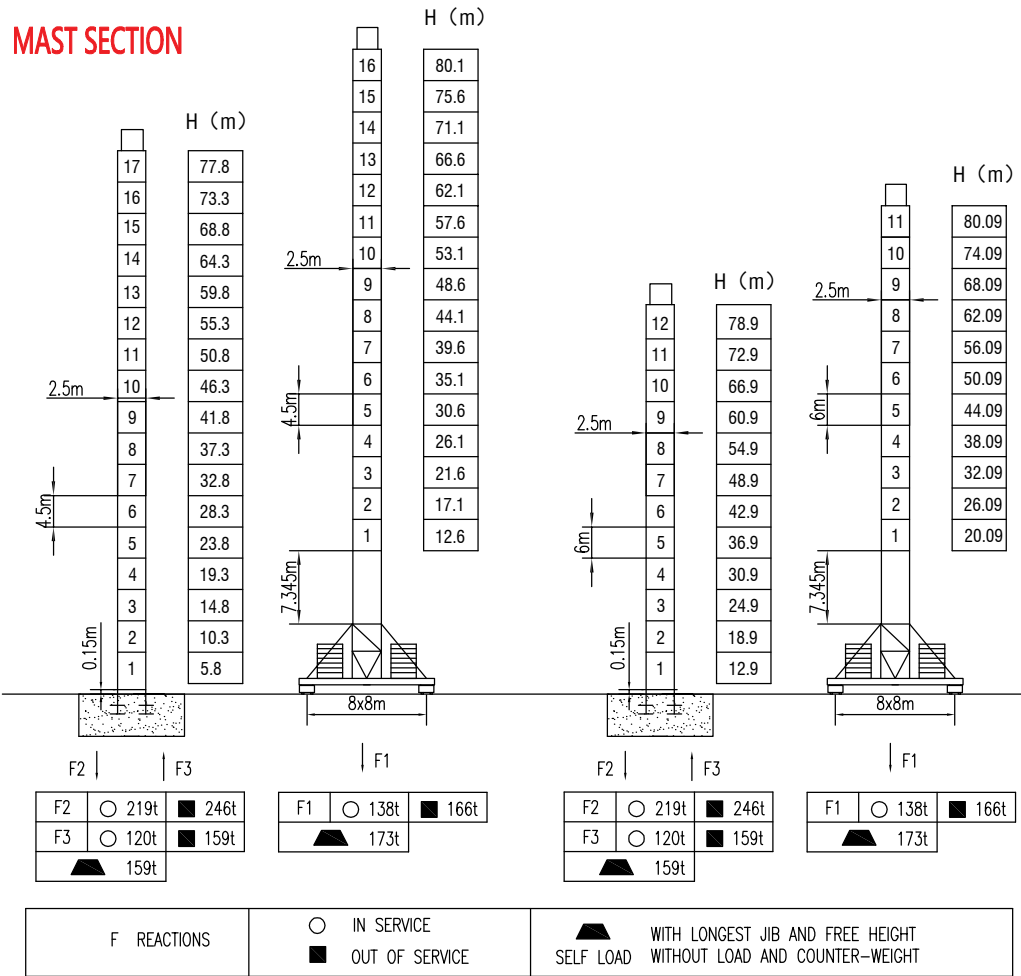

ANCHORAGES

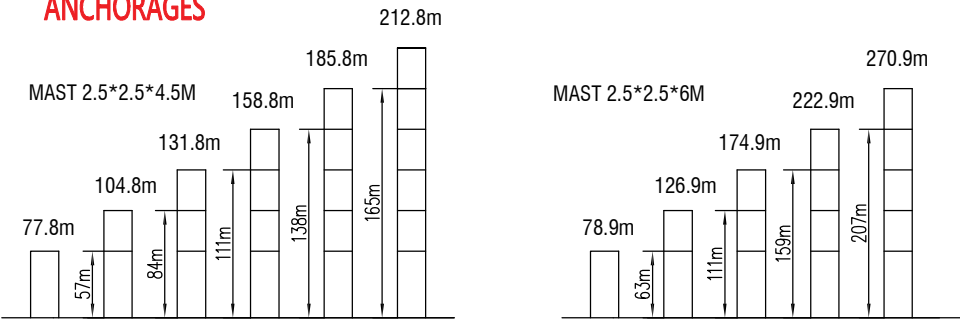

LOAD DIAGRAMS

Radius	3.9	R(Cmax)m/t	22.4	27	33	40	40.2	43	47	50	53	60	63	70	m
70m		22.4 / 20.0	20.0	16.1	12.7	10.1	10.0	9.15	8.25	7.65	6.95	5.85	5.45	4.65	t
		40.2 / 10.0					10.0	9.5	8.6	8.0	7.3	6.2	5.8	5.0	t
60m		22.4 / 20.0	20.0	16.1	12.7	10.1	10.0	9.15	8.15	7.65	6.95	5.85			t
		40.2 / 10.0					10	9.5	8.5	8.0	7.3	6.2			t
50m		22.4 / 20.0	20.0	16.1	12.7	10.1	10.0	9.15	8.15	7.65					t
		40.2 / 10.0					10	9.5	8.5	8.0					t
40m		22.4 / 20.0	20.0	16.1	12.7	10.1									t
		40.2 / 10.0					10.0								t

COUNTER-JIB BALLAST

70m	25t
60m	21.6t
50m	18.2t
40m	13.2t

TECHNICAL PARAMETER

MECHANISMS										 m	kw
Hoisting		90LVF50	m/min	0-4	0-40	0-120	0-2	0-20	0-60	600	90
			t	10	10	2.5	20	20	5		
Trolleying		11TVF	0-55 m/min								11
Slewing		145SVT	0-0.6 r/min								145Nm ^{x2}
		RCV145	0-0.8 r/min								145Nm ^{x2}
Travelling		5.5TRVF	0-30 m/min								5.5x6
Power supply			380v.50Hz / 440v.60Hz								
Necessary electric power			110KVA								

* The technical information can not be published without approval. The specifications are not subject to legal constraints due to continually products improved, the performance data will be modified without notice.