



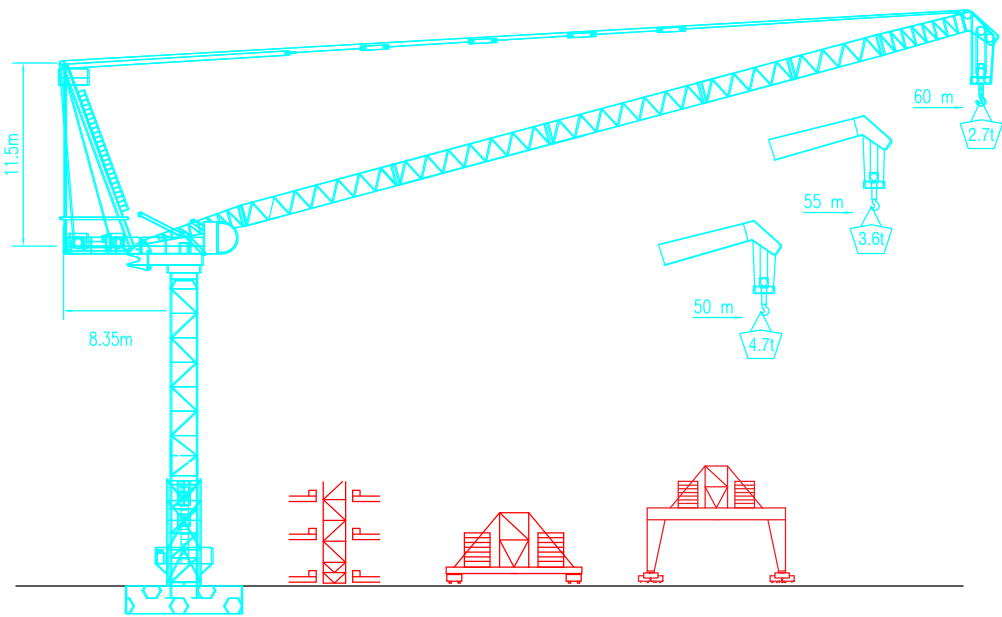


MILISCORP

MAST SECTION

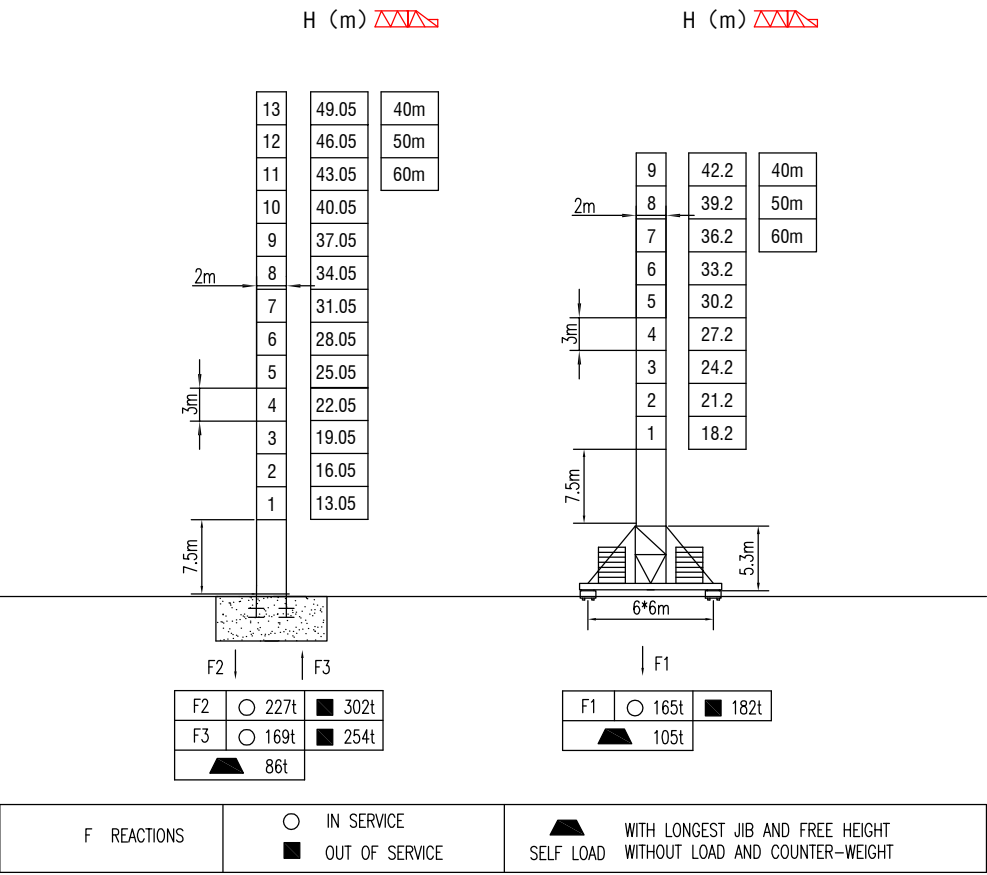


LOAD DIAGRAMS

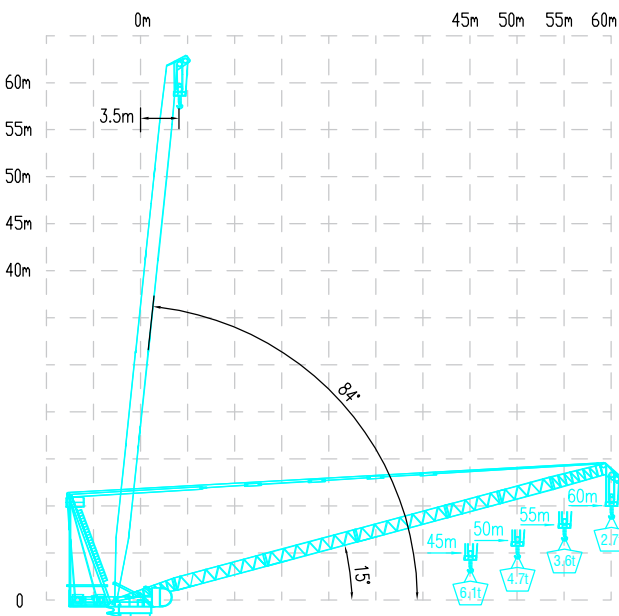

TECHNICAL PARAMETER

MECHANISMS										 m	kw	
Hoisting		55LFT30	m/min	0-41	0-55	0-82	0-25	0-50	0-75	520	55	
			t	6	4.5	3	12	9	6			
		70RCS30	m/min	0-40		0-80	0-20		0-40		530	51.5
			t	6		3	12		6			
Luffing		55DFT30	min	2.5							55	
Slewing		9SVF	r/min	0-0.8							9*2	
		145RCV12	r/min	0-0.8							145Nm*2	
Travelling		4TVF	m/min	0-30							3.4*4	
		RT443	m/min	22/11							3.4*4	
Power supply			380v.50Hz / 440v.60Hz									
Necessary electric power			170KVA									

INNER CLIMBING

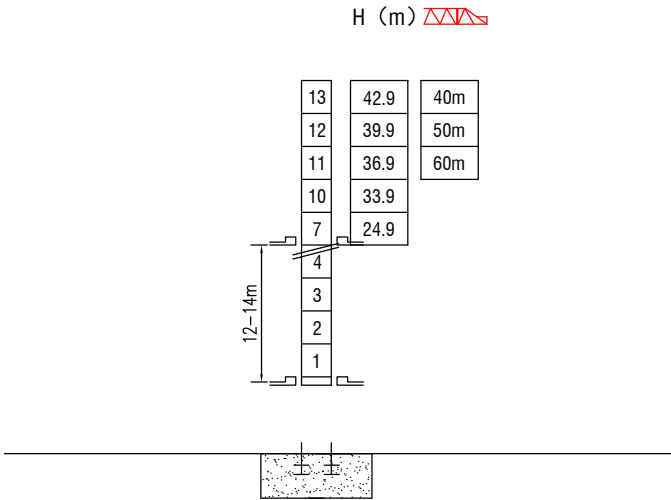

* The technical information can not be published without approval. The specifications are not subject to legal constraints due to continually products improved, the performance data will be modified without notice.