





HANDY HINT:

if the ground is very dry, soften the ground with water. Safety Directions:

WHERE TO USE:


Suitable for umbrellas, sunshades, clothes lines, letterboxes, marquees, volleyball and tennis nets, flag pole & mast, road & traffic and Fencing systems.

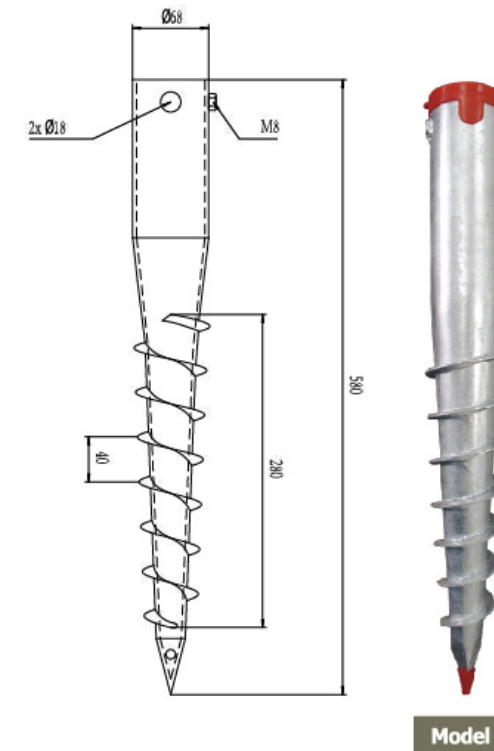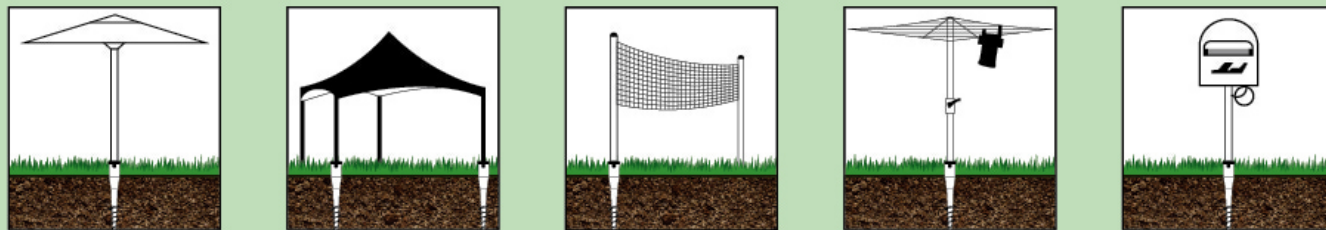

Finishing available
Hot Dipped Galvanized, Colour electric galvanized, powder coated.
Packing available
In cartons or in pallets

Model 1

Art No.	Diameter	Length	Nuts	Adjustment
HDN001	2.36"(60mm)	21.65"(550mm)	1×M6	1"1/8" / 1 1/2" / 1 5/8" (25mm/34mm/38mm/50mm)
HDN003	2.68"(68mm)	22.83"(580mm)	1×M8	1"1/2" / 1 5/8" / 2" / 2.16" (26mm/38mm/42mm/50mm/55mm)
HDN004	2.68"(68mm)	26"(650mm)	1×M8	1"1/2" / 1 5/8" / 2" / 2.16" (26mm/38mm/42mm/50mm/55mm)
HDN005	2.68"(68mm)	27.56"(700mm)	1×M8	1"1/2" / 1 5/8" / 2" / 2.16" (26mm/38mm/42mm/50mm/55mm)
HDN006	2.68"(68mm)	22.83"(580mm)	3×M8	2.36"(60mm)
HDN007	2.68"(68mm)	31.5"(800mm)	3×M8	2.36"(60mm)
HDN008	2.68"(68mm)	39.37"(1000mm)	3×M8	2.36"(60mm)

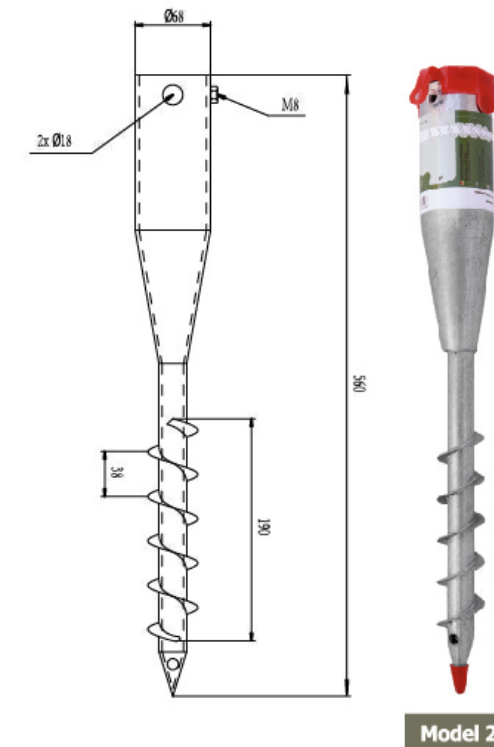

Model 2

Art No.	Diameter	Length	Nuts	Adjustment
HDN002	2.68"(68mm)	22"(560mm)	1×M8	1"1/2" / 1 5/8" / 2" / 2.16" (26mm/38mm/42mm/50mm/55mm)

The Ground Screw is re-usable and can be re-located with ease, And more in minutes with no concreting and no digging. Instructions:

- Ground Screw Installation:
 - Insert the turning bar (included) through the Ground Screw.
 - Using the turning bar, screw the Ground Screw 1/3 into the ground.
 - Make sure the Ground Screw is level.
 - Turn the Ground Screw until the rim is 4cm above the ground, ensuring it is sitting firmly in the ground.
- Select the required hole size and insert the adaptor sleeve.
- Insert the pole (post, umbrella, clothes line) into the Ground Screw.
- Secure into place with the butterfly screw (included).

