

Lubricator

Specification





Type	AL2000A	AL3000A	AL4000A	AL5000A	AL6000A
Port size NPT	1/8" • 1/4"	1/4" • 3/8"	3/8" • 1/2"	3/4" • 1"	3/4" • 1"
Gauge thread NPT	1/8"		1/4"		
Fluid	Compressed Air				
Operating pressure range	0.15~0.85Mpa(22-123Psi)				
Max.Flow rate L/min	1200	2000	3500	5000	
Ambient temperature	-10~60℃ (14~140 ° F)				
Filter precision	ISO VG32				
Cup material	Polycarbonate				
Guard cup	●	●	●	●	●

Notes 1:The guard cup of AL2000A series can be optional. 2:The cups of AL2000A、AL3000A series can be optional

Ordering Code

SFAL - **5000** - **A** - **06**
 AC Lubricator Type: 2000
 3000
 4000
 5000
 6000
 A: Improved type ;
 Blank: Old type
 Port size 01:NPT1/8",
 02:NPT1/4",03:NPT3/8",
 04:NPT1/2",06:NPT3/4",
 08:NPT1"

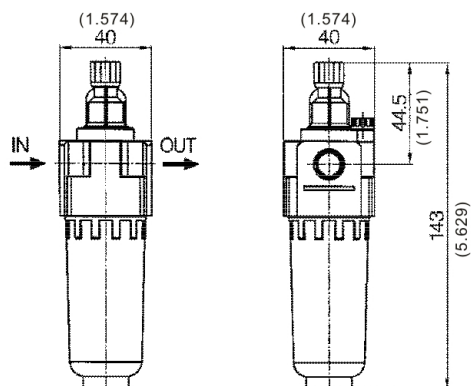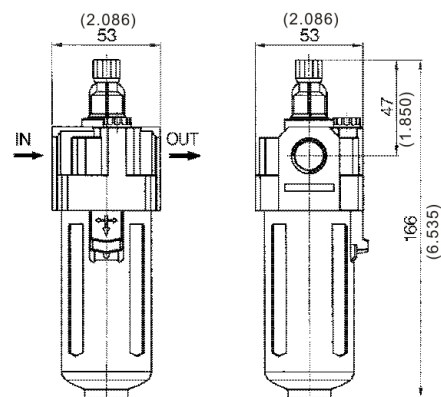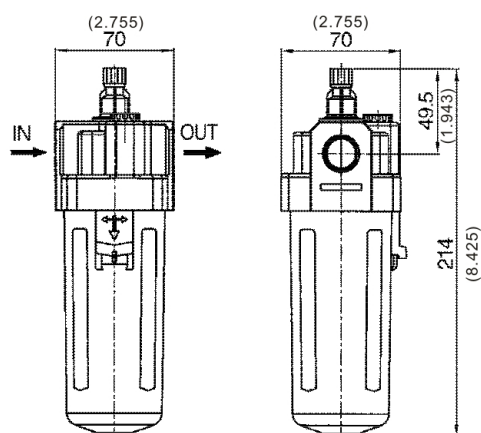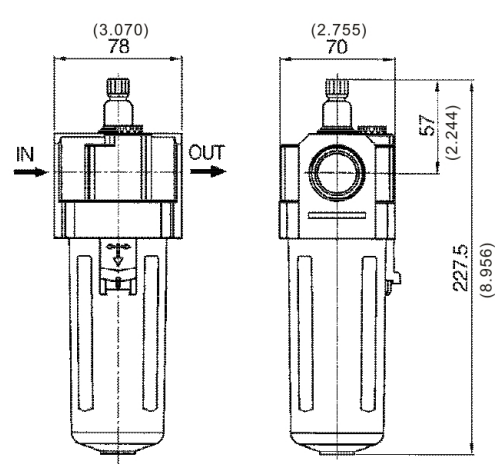

Overall Dimension
mm(inch)
SFAL2000A-01、 02

SFAL3000A-02、 03

SFAL4000A-03、 04

SFAL5000A-06、 08

SFAL6000A-06、 08
