

Specification


Type	OFR1000-10-32U、01	OFR2000-01、02、03	OFR4000-03、04、06	OFR6000-06、08
Port size NPT	10-32U1/8"	1/8.1/4." 3/8"	3/8." 1/2." 3/4"	3/4." 1"
Gauge thread	M5	1/8 "	1/4"	
Fluid	Compressed Air			
Operating pressure range	(0.5~0.85Mpa) 22~123Psi	0.15~1.2Mpa(22~174Psi)		
Max.Flow rate L/min	500	1700	3500	11500
Ambient temperature	-10~60(14~140F)			
Filter precision	5μ m or 40μm			
Structure	Overflow type			
Guard cup	-	●	●	●

Ordering Code

SFOFR - **2000** - **01** - **D**

OFR Filter + Regulator Type: 1000
2000
4000
6000


Port size: 10-32u. 01:NPT1/8", □: Manual drain
02:NPT1/4", 03:NPT3/8", D: Auto-drain;
04:NPT1/2", 06:NPT3/4",
08:NPT1"



Overall Dimension


mm(inch)

SFOFR1000-10-32U、01

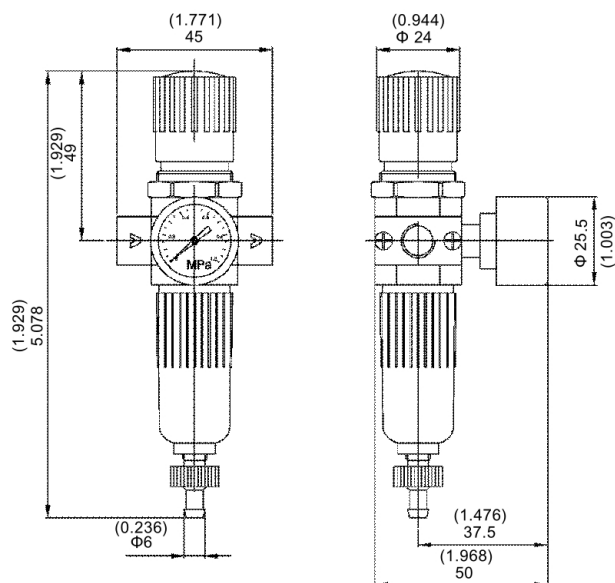


10-32U is without connector

SFOFR2000-01、02、03

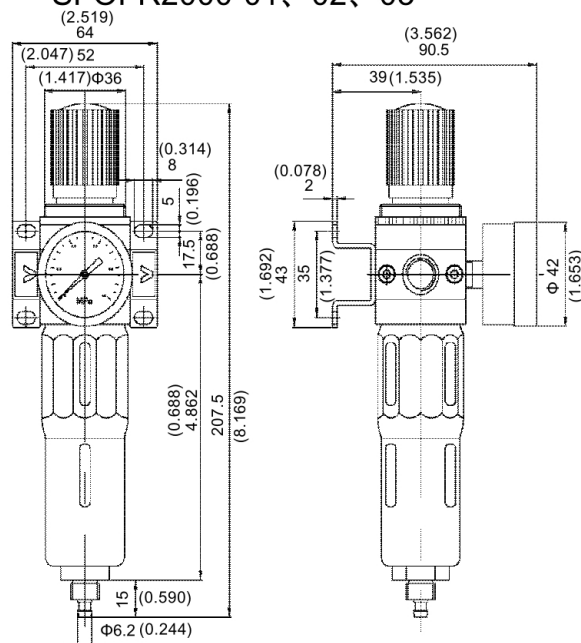

SFOFR4000-03、04、06

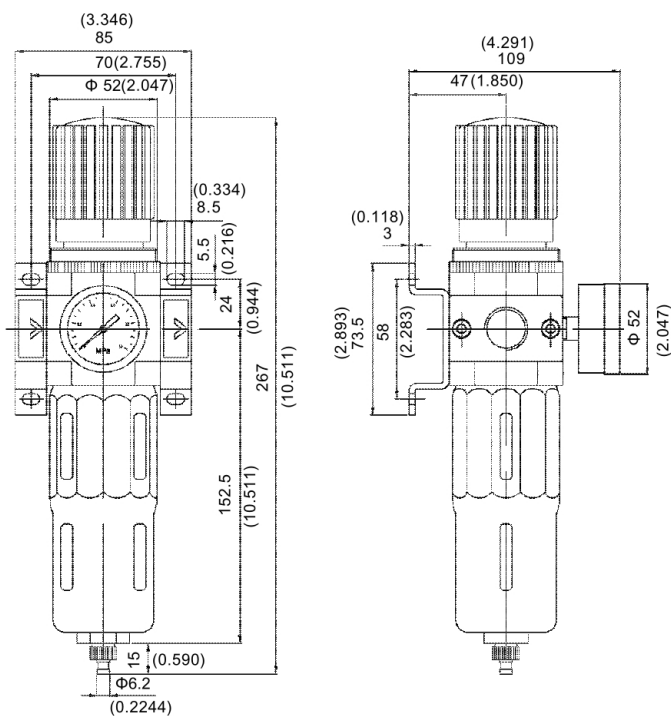

SFOFR6000-06、08

