

# Regulator

## Specification

|                          | AR2000A                 | AR3000A     | AR4000A     | AR5000A   | AR6000    |
|--------------------------|-------------------------|-------------|-------------|-----------|-----------|
| size NPT                 | 1/8" • 1/4"             | 1/4" • 3/8" | 3/8" • 1/2" | 3/4" • 1" | 3/4" • 1" |
| Gauge thread             | 1/8"                    |             | 1/4"        |           |           |
| Fluid                    | Compressed Air          |             |             |           |           |
| Operating pressure range | 0.15~0.85Mpa(22-123Psi) |             |             |           |           |
| Flow rate L/min          | 900                     | 2000        | 3000        | 5000      |           |
| ent temperature          | -10~60℃ ( 14~140° F )   |             |             |           |           |

## Ordering Code


**SFAR - 5000 - A - 06 - M**

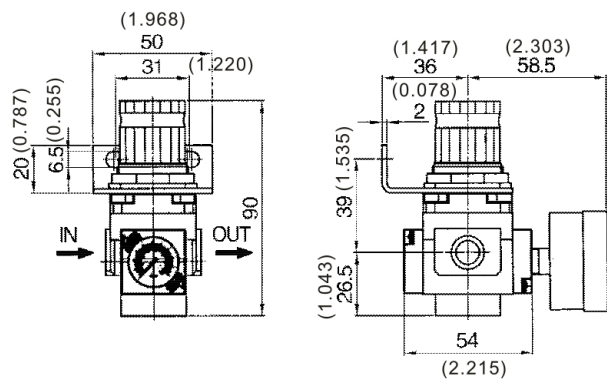
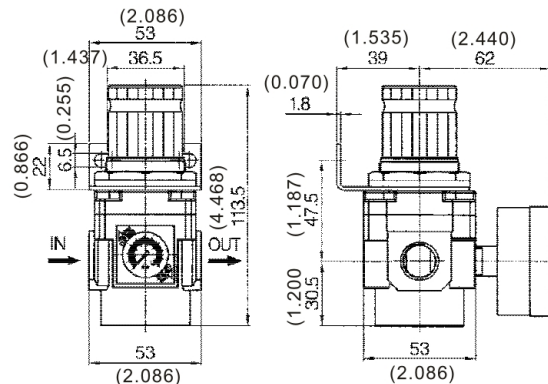
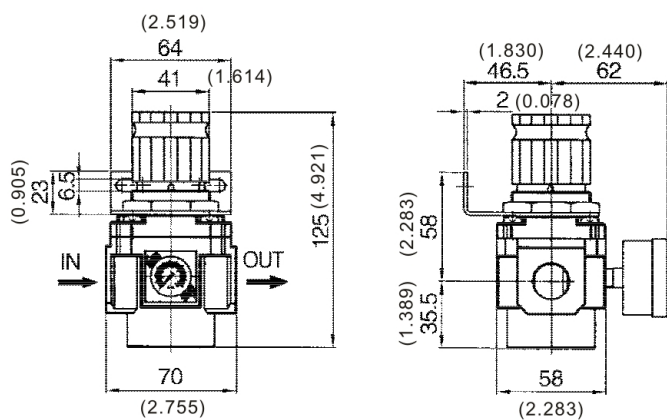
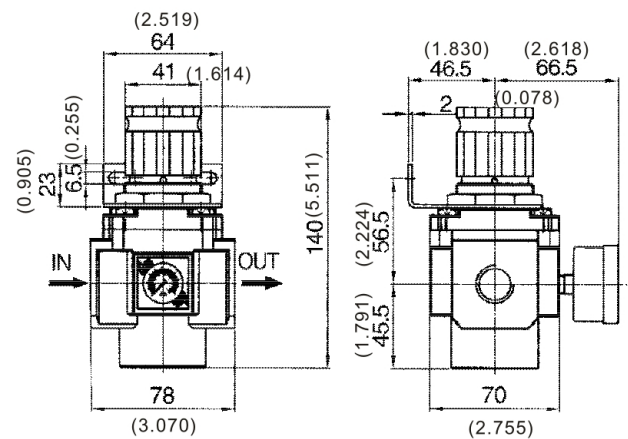
AR Regulator Type: 2000  
3000  
4000  
5000  
6000

A: Improved type ;  
Blank: Old type

Port size 01:NPT1/8",  
02:NPT1/4",03:NPT3/8",  
04:NPT1/2",06:NPT3/4",  
08:NPT1"

M: Embed square gauge;  
Blank: Round gauge



**Overall Dimension**
**mm(inch)**
**SFAR2000A-01、02**

**SFAR3000A-02、03**

**SFAR4000A-03、04**

**SFAR5000A-06、08**

**SFAR6000A-06、08**
