

PCR Thermal Cycler

<mark>Our company</mark>

Zhengzhou Mingyi Instrument Equipment Co., Ltd is an enterprise professionally engaged in the life sciences equipment and laboratroy device. Our main products are semiconductor Instrument gene amplification (PCR). the product adopts the most advanced semiconductor technology (Peltier) in the domestic and abroad. We import Marlow peltier from USA to ensure product performance, enhance the expansion speed, and prolong product life. With the long-term test stability control systems, the product can maximize the reliability of analysis results. Nowadays the product has been widely applied in biology, medicine, agriculture, plant protection, animal husbandry and veterinary, sanitary and quarantine, aquaculture, forensic and biological materials, a variety of molecular biology and high-tech field.

Working principle

"People oriented, faithful service" is our principle on the product quality and its maintenance. We are always paying great attention on the quality management system and our all products have got CE approved. we will make every effort to provide customer with good quality and reasonable price.

PCR thermal cycler

We have many models PCR thermal cycler machine including general PCR thermal cycler and gradient PCR thermal cycler, they are with different capacity and function. All of them use advanced technology, have LCD color screen, use Windows System, have USB



interface, the most important is they have accurate temperature uniformity and high temperature ramping rate. More and more customers give good words to our PCR thermal cycler.

Hot sale models

The following table is our hot sale models. For more information, welcome to contact us if you have any demand, please contact us as the following card.

| Model | Description |
|---------------------------------------|--|
| GET-S Series PCR thermal cycler | GET-S uses 6 pieces of standard Marlow(US) peltier. Its |
| | max. ramping rate is 4.5 $^\circ C$ /s and cycle times is more than |
| | 200,000. The product combines a variety of advanced |
| | technologies: Windows system; color touch screen; |
| | several block as options; PC on-line function; printing |
| | function; big storage capacity and support USB device. All |
| | above functions allow PCR's excellent performance and |
| | meet higher experiment's need. |
| | Model:GE9612T-S/GE9632T-S/GE6022T-S/GE3842T-S |
| | Capacity:96*0.2ml/96*0.2ml+77*0.5ml/60*0.5ml/384well |
| GE TOUCH Series PCR thermal cycler | GE- Touch uses customized Marlow(US) peltier. Its max. |
| | ramping rate is 5 $^\circ \! \mathbb{C}$ /s and cycle times is more than |
| | 1000,000. The product combines a variety of advanced |
| | technologies: Windows system; color touch screen; |
| | independently controlled 4 temperature zones,; PC |
| | on-line function; printing function; big storage capacity |
| | and support USB device. All above functions allow PCR's |
| | excellent performance and meet higher experiment's |
| | need. |



ZHENGZHOU MINGYI INSTRUMENT EQUIPMENT CO., LTD

郑州鸣一仪器设备有限公司

| · | |
|-----------------------------------|---|
| | Model: |
| | General:GE9611T/6021T /4851T/4831T /3841T |
| | Gradient:GE9612T/6022T /4852T/4832T /3842T |
| | Capacity:96×0.2ml , 60×0.5ml , Double 48×0.2ml, |
| | 48×0.2ml+30×0.5ml,384well , In-situ Plate |
| <section-header></section-header> | GET3X uses Marlow(US) peltier. Its max. Ramping rate is |
| | 4.5 $^\circ \!\!\!\! \mathbb{C}$ /s and cycle times is more than 200,000. The |
| | product combines a variety of advanced technologies: |
| | Windows system; color touch screen; 3 blocks can run |
| | independently; PC on-line function; printing function; big |
| | storage capacity and support USB device. All above |
| | functions allow PCR's excellent performance and meet |
| | higher experiment's need. |
| | Model:GET3X/GET3XG |
| | Capacity:3×(32×0.2ml) |
| <section-header></section-header> | ELVE-32G uses Marlow(US) peltier. Its max. Ramping |
| | rate is 5 $^\circ \!$ |
| | product combines a variety of advanced technologies: |
| | Android system; color touch screen; gradient function; |
| | WIFI module built-in; support cell phone APP control; |
| | email notification function; big storage capacity and |
| | support USB device. |
| | Model:ELVE-16/ELVE-32G |
| | Capacity:16×0.2ml(4×4 layout)/32×0.2ml(4×8 layout) |




ZHENGZHOU MINGYI INSTRUMENT EQUIPMENT CO., LTD 郑州鸣一仪器设备有限公司

Factory picture





ZHENGZHOU MINGYI INSTRUMENT EQUIPMENT CO., LTD 郑州鸣一仪器设备有限公司

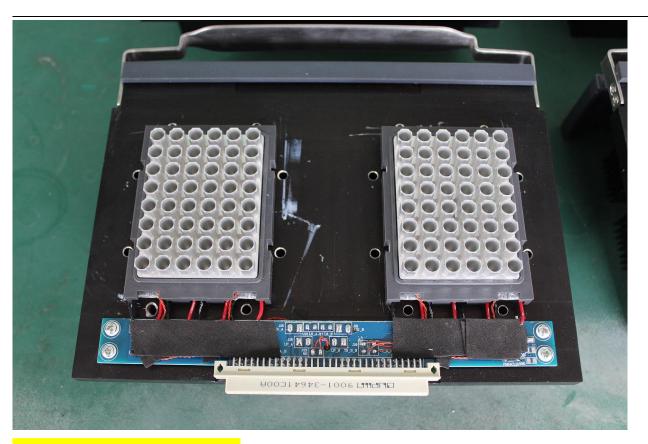

Contact information

CONTACT INFORMATION

For more information, please contact us at any time.

Tel:+86 18603710670 Wechat:+86 18603710670 WhatsApp:+86 18603710670 Skype:kevin.wang_43 E-Mail:kevin.wang@mingyint.com