

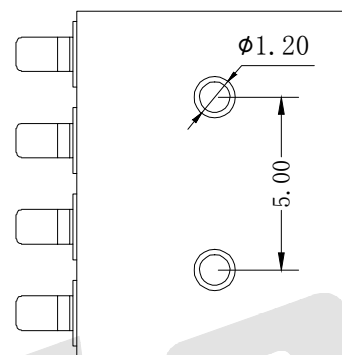


HSF

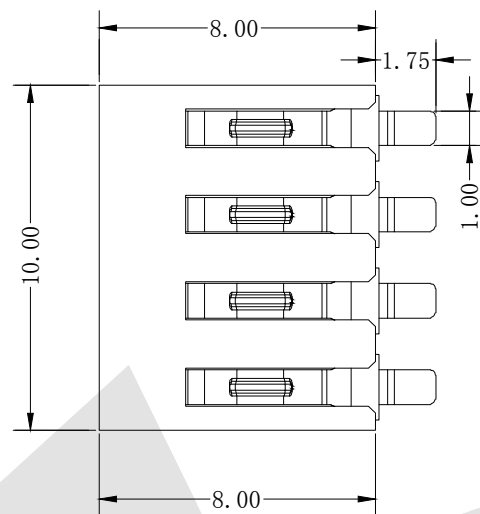

ROHS

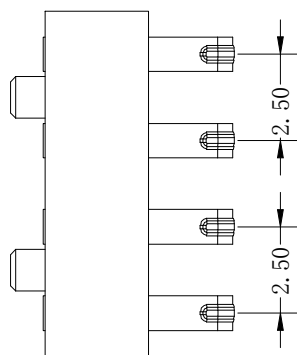



NOTES:

1. Housing: Thermoplastics LCP black
Terminal: Phosphor bronze, T-015MM
Peg: Brass T-0.2MM
2. Finish: Terminal: Gold Plated
Peg: SN Plated
3. Packing: Reel Tape

Ordering Code:

ABT28 - 03 - L - C - X - D
① ② ③ ④ ⑤ ⑥


- ① Series No: ⑤ Contact Plating:
② No. of Contacts G0: Gold flash
03: 03Pin G1: 3u" gold
③ Insulator Material: G2: 5u" gold
P: PBT+30%GF G3: 10u" gold
L: LCP G4: 15u" gold
④ Pitch G5: 30u" gold
C: 2.5mm Pitch ⑥ Packing:
A: Tray
B: Bag
C: Tube
D: Tape Reel

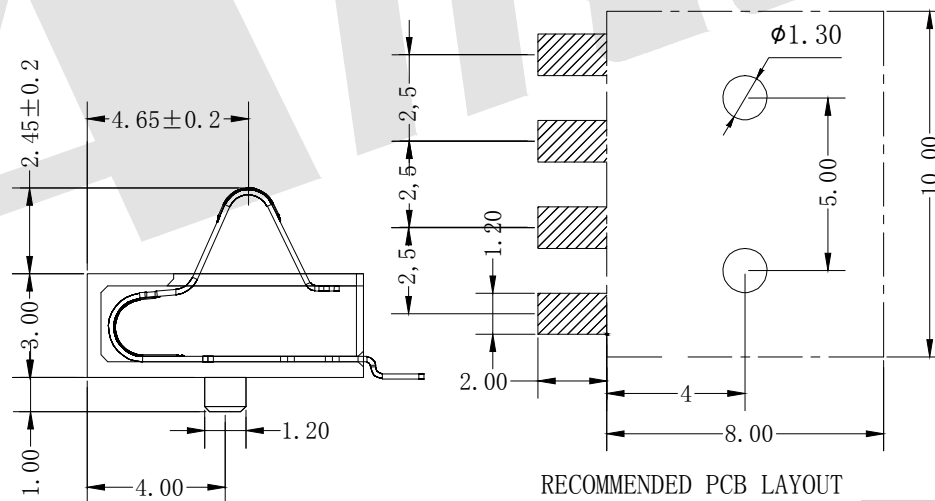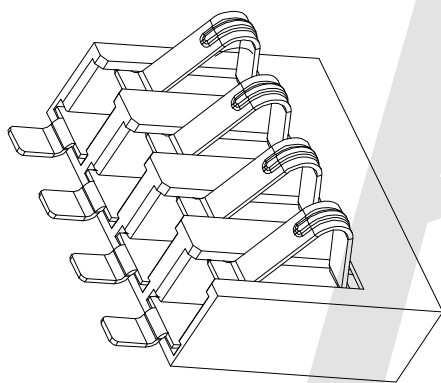

RECOMMENDED PCB LAYOUT
TOP VIEW (. XX±0.05)

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:
As Shown UNIT:
mm
DRAW
Wu Feng Rong DATE
30/03/2020
CHECK
BobYang DATE
30/03/2020



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE:

4 Circuit Battery Connector 2.5MM Centers H=3.0MM

DRAWING NO: ABT29-04LCXD

PRODUCT NO: ABT29-04LCXD

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8