

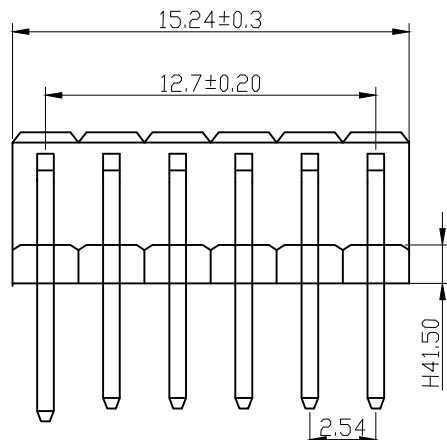



HSF

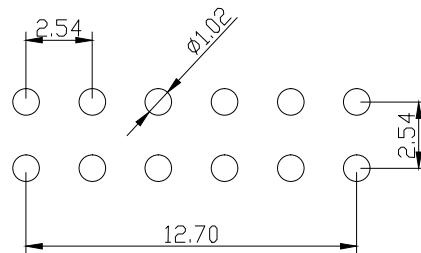

Note: The Pin 2 is 5.3mm, L24.0mm
Kinked: pin 1, 2, 11, 12P

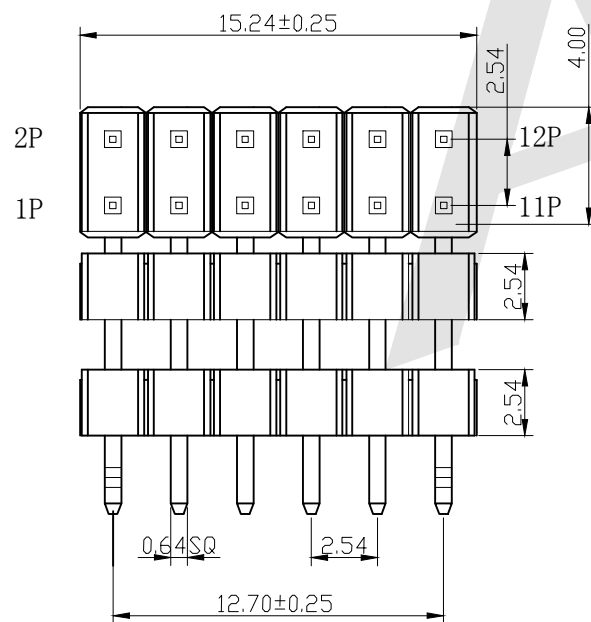

PCB LAYOUT

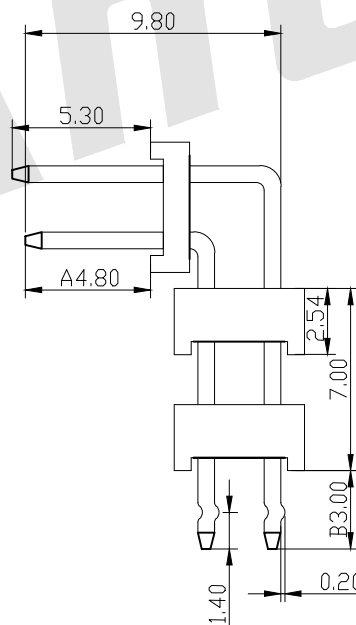

SPECIFICATION

Current Rating:	3 Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65°C to +125°C
Contact Material:	Brass
Insulator Material:	PBT, UL 94V-0 Black

Ordering Code:

PHEUS05 - X - X - D - X - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
② No. of Contacts
2*6
③ Contact Plating:
G0: Gold flash S0: Selective
G1: 3u" Gold S1: Selective 3u"
G2: 5u" Gold S2: Selective 5u"
G3: 10u" Gold S3: Selective 10u"
G4: 15u" Gold S4: Selective 15u"
G5: 30u" Gold S5: Selective 30u"
SN: Tin
④ Connector Type
D: Dual
⑤ Pin Length:
A: 0480=4.80mm
B: 0300=3.00mm
Please mark the desired length in the A/B
- ⑥ Insulator Material
A: PBT
B: PA6T
C: LCP
D: PA46
E: PA9T
⑦ Packing:
A: Tray B: Bag
T: Tube U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP
⑧ Plastic High
H1: 1.70mm
H2: 2.54mm
H3: 2.00mm
H4: 1.50mm

Standard IE P/N :

PHEUS05-2*6-G0-D-0480-0300-B-T-H2+H4

Unless Otherwise specified tolerance

X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:

As Shown

UNIT:

mm

DRAW

Wu Feng Rong

DATE


04/09/2019

CHECK

BobYang

DATE

04/09/2019



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE:

2.54mm pin header triple plastic bent 90° degree

DRAWING NO:

PHEUS05-XXDXXXX

PRODUCT NO:

PHEUS05-XXDXXXX

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8