

HSF











ROHS

Specifications:  
 Part No.: AH2508V-M-2xXP  
 Voltage rating: 250V AC/DC  
 Current rating: 3A AC/DC  
 Withstanding voltage: 1000V AC/minute  
 Temperature range: -25°C~+85°C  
 Insulation resistance: ≥1000MΩ  
 Contact resistance: ≤10mΩ  
 After environmental testing : ≤20mΩ  
 Material: Pa66 UL94-V0  
 Q'ty/Bag: 1000Pcs

Ordering information:  
AH2508V-M-2xXP - XX - 03  
 1 2 3

- Part No.
- Cloor:  
 (blank)-Ivory  
 BK-Black BR-Brown  
 RD-Red GY-Gray  
 BL-Blue PK-Pink  
 YL-Yellow LY-Lemon yellow  
 GN-Green P-Purple  
 OR-Orange LE-Light Blue  
 WH-White FY-Vivid yellow
- Series No.

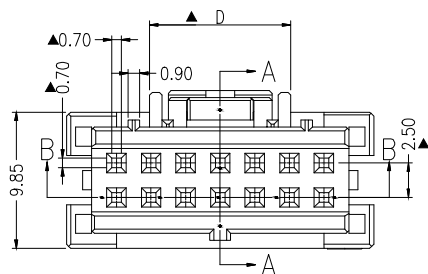

2x4Pin

Poles	Dimensions (mm)			
	A	B	C	D
2x04	7.50	14.70	11.10	9.60
2x05	10.00	17.20	13.60	9.60
2x06	12.50	19.70	16.10	10.20
2x07	15.00	22.20	18.60	10.20
2x08	17.50	24.70	21.10	10.20
2x09	20.00	27.20	23.60	17.70
2x10	22.50	29.70	26.10	17.70
2x11	25.00	32.20	28.60	17.70
2x12	27.50	34.70	31.10	17.70
2x13	30.00	37.20	33.60	17.70
2x14	32.50	39.70	36.10	17.70
2x15	35.00	42.20	38.60	17.70
2x16	37.50	44.70	41.10	17.70
2x17	40.00	47.20	43.60	17.70
2x18	42.50	49.70	46.10	17.70
2x20	47.50	54.70	48.60	17.70

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15


SCALE: As Shown UNIT: mm  
 DRAW ZLA DATE 20/04/2022  
 CHECK BobYang DATE 20/04/2022

**Antenk** ANTENK ELECTRONICS CO., LTD  
 Http://www.antenk.com  
 E-mail: sales@antenk.com

TITLE:  
 2.5mm Pitch Male Dual row Housing  
 Connector

DRAWING NO: AH2508V-M-2xXP-XX-03

PRODUCT NO: AH2508V-M-2xXP-XX-03



3rd ANGLE PROJECTION

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		