
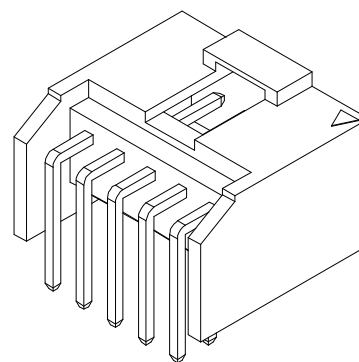


HSF


RoHS

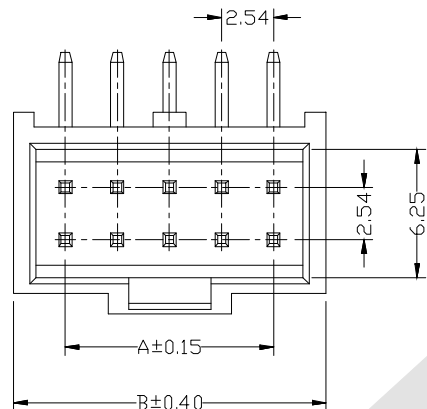

Specifications


Voltage Rating:250V AC/DC
 Current Rating:3A AC/DC
 Withstanding Voltage:1500V AC/Minute
 Insulation Resistance:1000MΩ Min
 Temperature Range: -25°C~+85°C
 Contact Resistance: 20mΩ Max
 Pin Material: Brass/Gold-flash or Tin-plated
 Material: PBT, UL94V-0
 Q' ty/Bag:1000PCS

Ordering Information & Dimensions

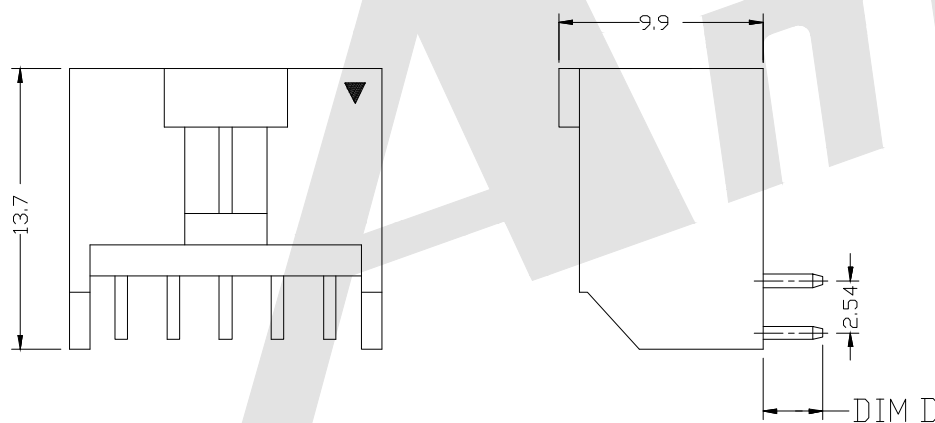

D	DIM D
1	2.50mm
2	2.90mm

Poles	Dimensions (mm)	
	A	B
6	5.08	10.20
8	7.62	12.70
10	10.16	15.20
12	12.70	17.80
14	15.24	20.30
16	17.78	22.90
18	20.32	25.40
20	22.86	27.90
22	25.40	30.50
24	27.94	33.00
26	30.48	35.60
28	33.02	38.10
30	35.56	40.60
32	38.10	43.20
34	40.64	45.70
36	43.18	48.30
38	45.72	50.80
40	48.26	53.30

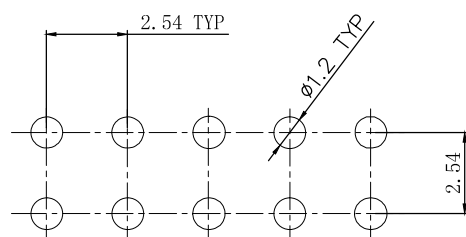


Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Antenk® ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

SCALE: As Shown UNIT: mm
 DRAW Jack Bao DATE 11/20/2018
 CHECK Bob Yang DATE 11/20/2018

TITLE:2.54mm pitch 90° Wafer Connector series



DRAWING NO:AW2555R-XP
 PRODUCT NO:AW2555R-XP

REV	DESCRIPTION	DATE
1	2	3
4	n	5