

1


2

HSF



ROHS

Edit
Copy
For E

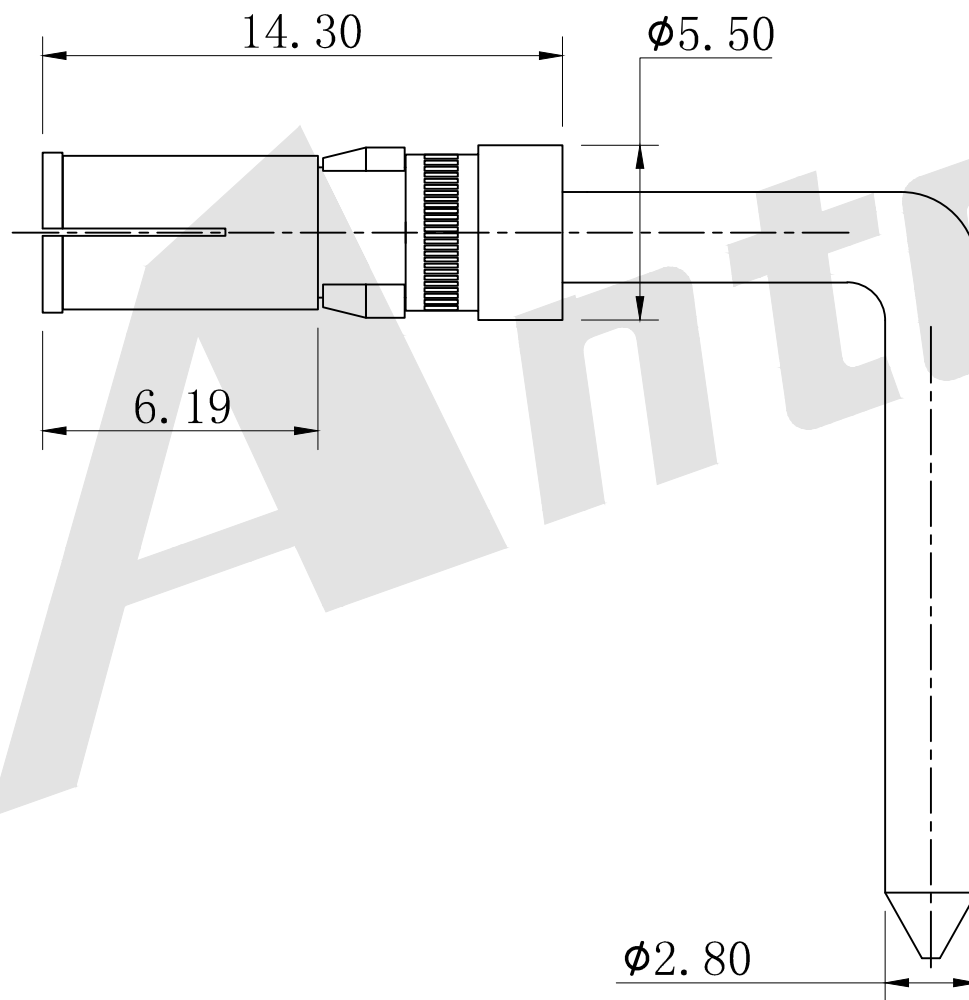

NOTES:

SPECIFICATION:

Contact Retention orce in
Housing:10LBS

ELECTRICAL:

Contact Current Rating:20AMP.
Material:Brass.

Ordering Code:

CP11F - 6D X
① ②

①Series

② Contact Plating:

G0: Gold flash G1: 3u" Gold
G2: 5u" Gold G3: 10u" Gold
G4: 15u" Gold G5: 30u" Gold

Unless Otherwise specified tolerance
X. ±0.35 X.XX:±0.20
X.X:±0.25 X.XXX:±0.15

SCALE:
As Shown
DRAW
Lv Xun Hua
CHECK
BobYang



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: POWER PIN RIGHT ANGLE FEMALE CONTACT
20A (work in coaxial)

DRAWING NO: CP11F-6DX

PRODUCT NO: CP11F-6DX

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8