









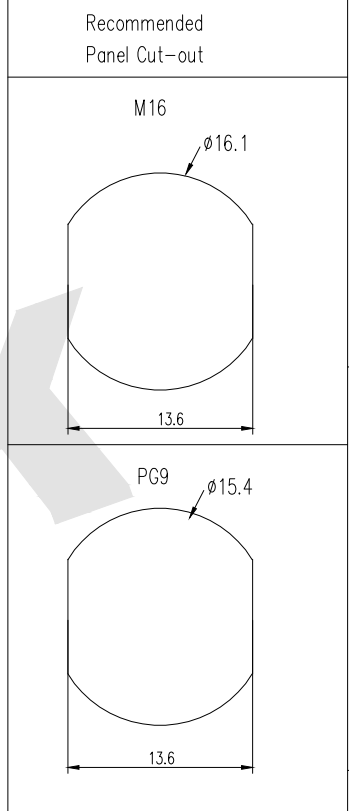
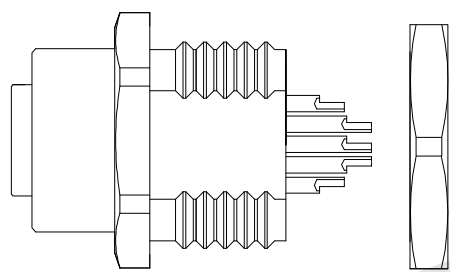


HSF  RoHS 

A-CODE	9 Pin	10 Pin	11 Pin	12 Pin	13 Pin	14 Pin	15 Pin	16 Pin	17 Pin
									

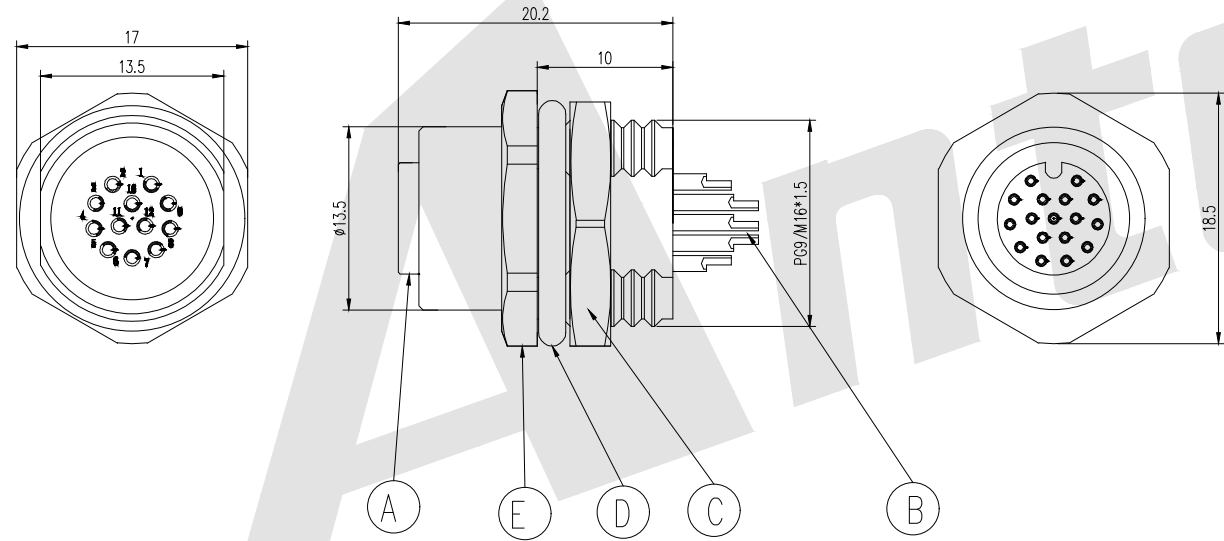

Order Code:  
 M1202 - A - XP - M - 013  
 ① ② ③ ④ ⑤

① Type of M series: M1202  
 ② Code Option: A  
 ③ NO. of PINS: 09~17  
 ④ Gender option: Male  
 ⑤ Series number: 013

Engagement force	≤30N	Rated voltage	2-5pin: 60v DC 6-8pin: 30V DC
Isengagement force	≥5N	Rated current	2-5pin: 4A 6-8pin: 2A
echanical lifespan	≥500	Insulation resistance	≥1000 MΩ
IP rating	IP67/IP68	Contace resistance	≤10mΩ
Flammability	UL94 v-0	Operation Temperature	-40 T0+105℃

E	Over Mold	1	NICKL PLATED BRASS
D	O RING	1	SILIGONE RED
C	NUT	1	NICKL PLATED BRASS
B	Female PIN	/	PHOSPHOR BRONZE GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+GF BLACK
Item	PART NAME	QTY	MATERIAL /FINISH

Unless Otherwise specified tolerance  
 X.±0.35 X.XX:±0.20  
 X.X:±0.25 X.XXX:±0.15

SCALE: As Shown UNIT: mm


DRAW ZLA DATE 24/05/2022

CHECK BobYang DATE 24/05/2022

**Antenk** ANTENK ELECTRONICS CO.,LTD  
 Http://www.antenk.com  
 E-mail:sales@antenk.com

TITLE:  
 M12 9~17P Male Waterproof Wire Side Lock Back Panel PG9 M16 SW17T

DRAWING NO: M1202-A-XP-M-013  
 PRODUCT NO: M1202-A-XP-M-013



REV		DESCRIPTION		DATE
1				
2				
3				
4				
5				