

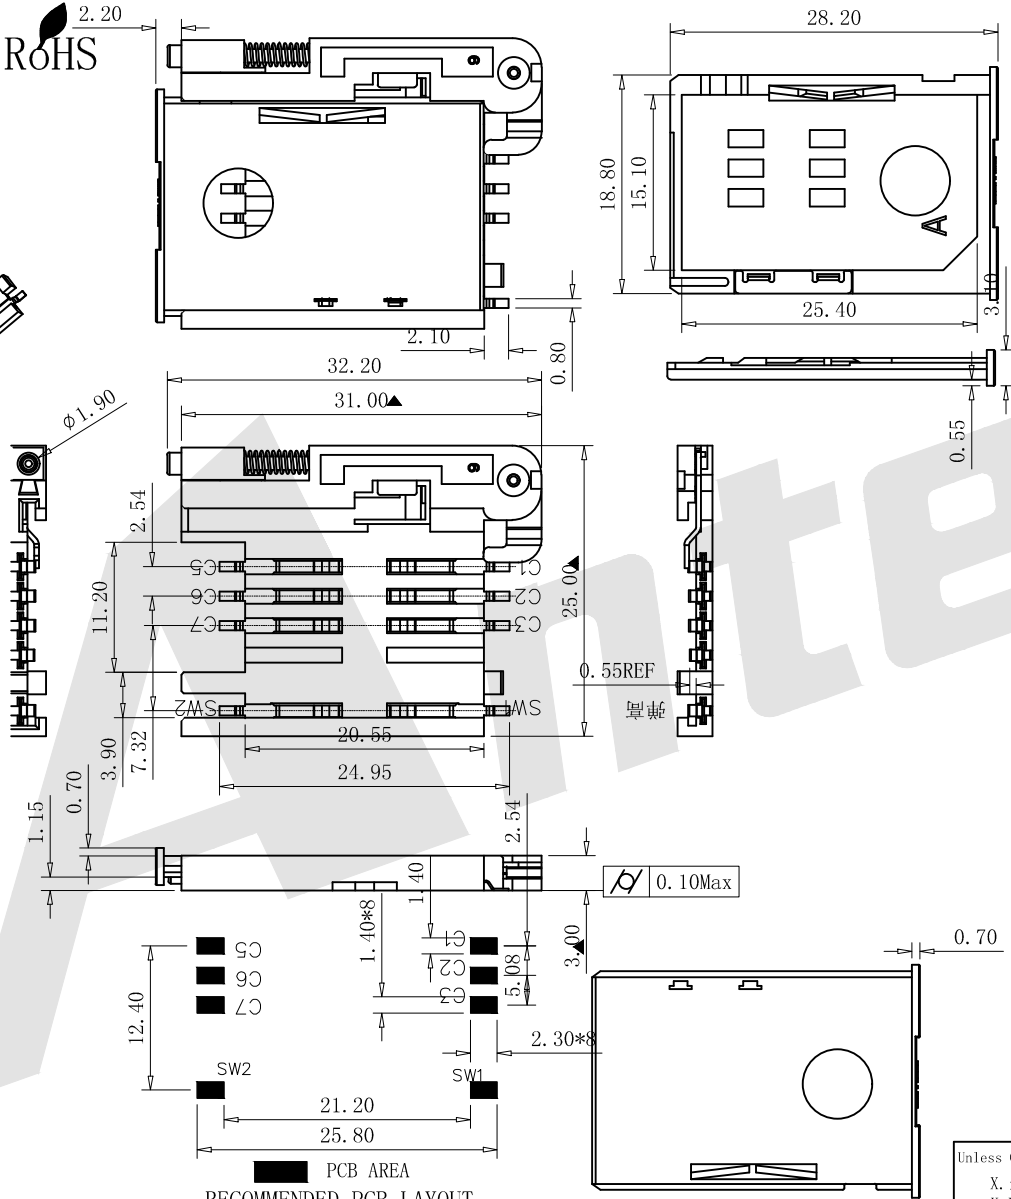


HSF





RoHS

2.20



PIN NO.	PIN NAME
C1	Supply Voltage Vcc
C2	Reset (RST)
C3	Clock (GLE)
C4	NA
C5	Ground
C6	Programing Voltage VPP
C7	I/O
C8	NA

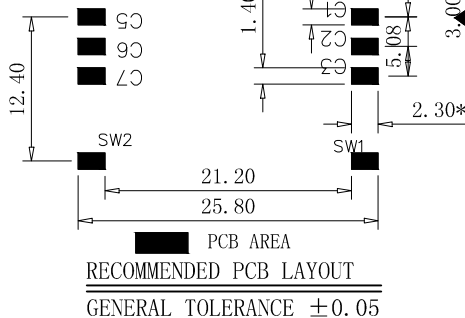

Specification  
 MATERIAL:  
 Insulator: High Temperature Thermoplastic, UL 94V-0.  
 Contact: Copper Alloy T=0.15mm  
 Cap Tray:PA

PLATING:  
 Contact: Plated 50u'' Ni Overall Contact Au 3U, pad TIN

Electrical:  
 Current Rating :2Amps. max  
 Voltage Rating ;5V AC/DC  
 Ambient Temperature Range :-40°C~+85°C  
 Storage Teperature Range :-40°C~+85°C  
 Ambient Humidity Range :95% R.H. Max.  
 Contact Resistance:100mΩmax.  
 Insulation Resistance:1000mΩmin./500VDC  
 Temperature Resistance Range: 260°C  
 Mating Cycles: 5000Min Insertions

Oldering Code:  
 ATK - SIM - 8 - B - 300 - A - 033  
 ① ② ③ ④ ⑤ ⑥

① Company Name:  
 ATK

② Pin Number:  
 8

③ Registration Mast  
 A:With Boss B:Without Boss

④ Height:  
 300=3.00mm

⑤ Packing  
 A:Tray  
 T:Tube  
 R:Tape&Reel

⑥ Series Number:  
 033

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15


**Antenk** ANTEK ELECTRONICS CO., LTD  
[Http://www.antenk.com](http://www.antenk.com)  
 E-mail:sales@antenk.com

SCALE:  
 As Shown UNIT: mm

DRAW ZLA DATE 22/02/2022  
 CHECK BobYang DATE 22/02/2022

TITLE:  
 SIM CARD 8PIN H3.0mm Push with Card Tray connector

DRAWING NO: ATK-SIM-8-B-300-A-033  
 PRODUCT NO: ATK-SIM-8-B-300-A-033



REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		