



Ordering Information:






AW1502V-S-XP - \*\*  
1 2

1.Part No.

2.Color:

(blank) - Ivory

BK - Black

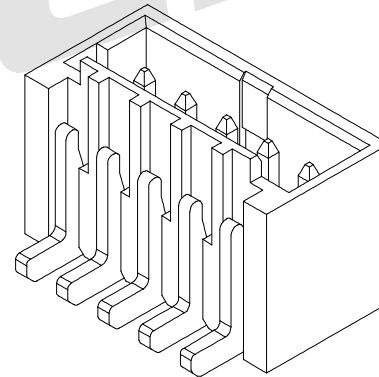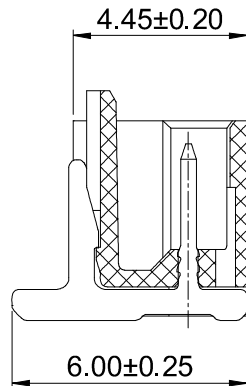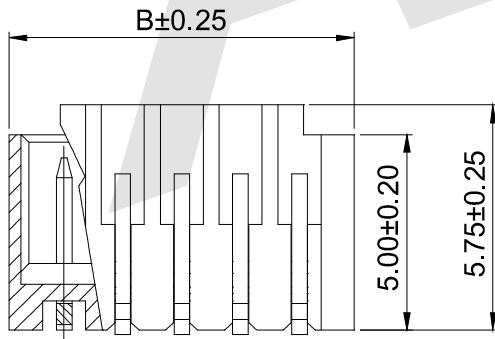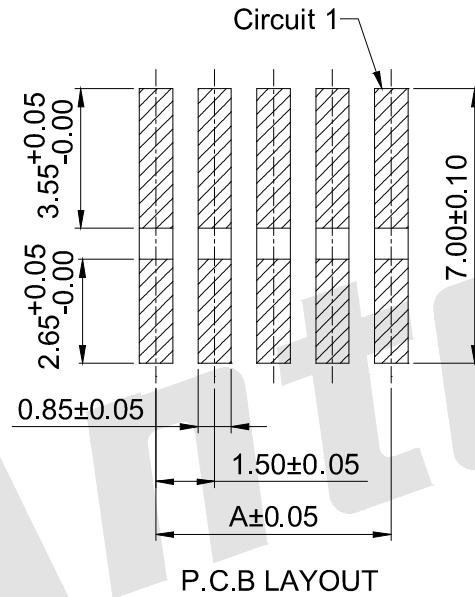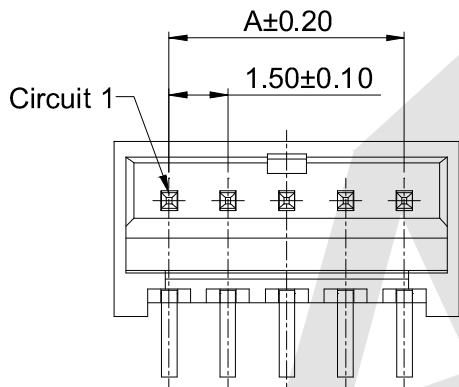

SPECIFICATIONS

- Voltage rating: 350V AC,DC
- Current rating: 3A AC,DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -40°C~+105°C

WAFER

- Part NO: AW1502V-S-xP
- Material: Pin: Brass/Tin over Nickel  
Insulator: Nylon 6T, UL94V-0
- Mates with: AH1502 series Housing
- Color: Ivory


Ordering Information & Dimensions:

Poles	Part No.	Dimensions(mm)	
		A	B
02	AW1502V-S-02P	1.50	4.30
03	AW1502V-S-03P	3.00	5.80
04	AW1502V-S-04P	4.50	7.30
05	AW1502V-S-05P	6.00	8.80
06	AW1502V-S-06P	7.50	10.30
07	AW1502V-S-07P	9.00	11.80
08	AW1502V-S-08P	10.50	13.30
09	AW1502V-S-09P	12.00	14.80
10	AW1502V-S-10P	13.50	16.30
11	AW1502V-S-11P	15.00	17.80
12	AW1502V-S-12P	16.50	19.30
13	AW1502V-S-13P	18.00	20.80
14	AW1502V-S-14P	19.50	22.30
15	AW1502V-S-15P	21.00	23.80

Unit:mm

Unless Otherwise specified tolerance  
X. ±0.35 X.XX:±0.20  
X.X:±0.25 X.XXX:±0.15

SCALE: As Shown UNIT: mm  
DRAW Jack Bao DATE 12/16/2017  
CHECK Bob Yang DATE 12/16/2017



**Antenk**® ANTENK ELECTRONICS CO.,LTD  
Http://www.antenk.com  
E-mail:sales@antenk.com

TITLE: 1.50mm pitch 180° Wafer-SMT Connector Series

DRAWING NO: AW1502V-S-xP

PRODUCT NO: AW1502V-S-xP

REV

DESCRIPTION

DATE