

HSF







ROHS

SPECIFICATIONS

- Voltage rating: 600V AC,DC
- Current rating: 7A, AC,DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25°C~+85°C
- Contact resistance: 20mΩ max

WAFER

- Part NO: AW4141V-1x02P
- Pin Material: Brass
- Housing Material: Nylon66 UL94V-0
- Contact Area Plating: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

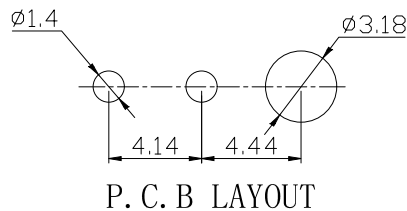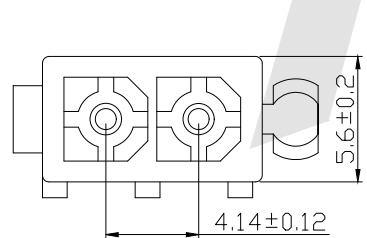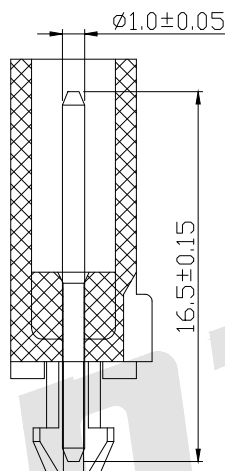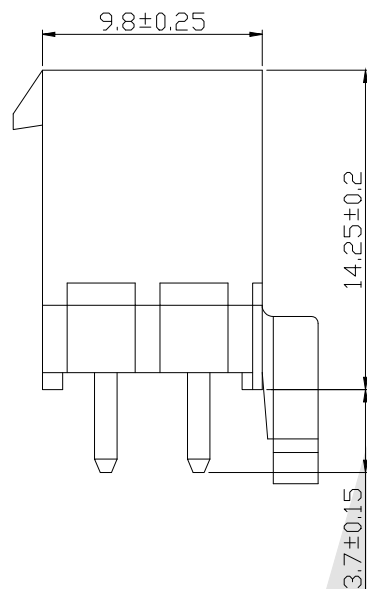


Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15



ANTENK ELECTRONICS CO., LTD  
[Http://www.antenk.com](http://www.antenk.com)  
 E-mail:sales@antenk.com

SCALE: As Shown	UNIT: mm
DRAW Jack Bao	DATE 08/14/2017
CHECK Bob Yang	DATE 08/14/2017

TITLE:AMP4.14mm 180° Wafer Connector Series



DRAWING NO: AW4141V-1x02P

PRODUCT NO: AW4141V-1x02P

REV	DESCRIPTION	DATE

HSF







SPECIFICATIONS

- Voltage rating: 600V AC/DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25°C~+85°C
- Contact resistance: 20mΩ max

WAFER

- Part NO: AW4141V-1x03P
- Pin Material: Brass
- Housing Material: Nylon66 UL94V-0
- Contact Area Plating: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

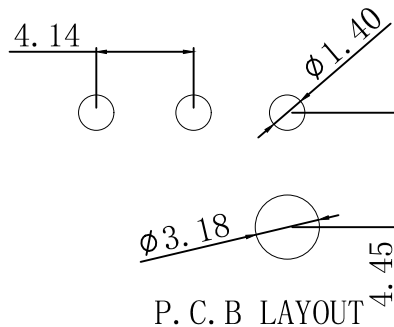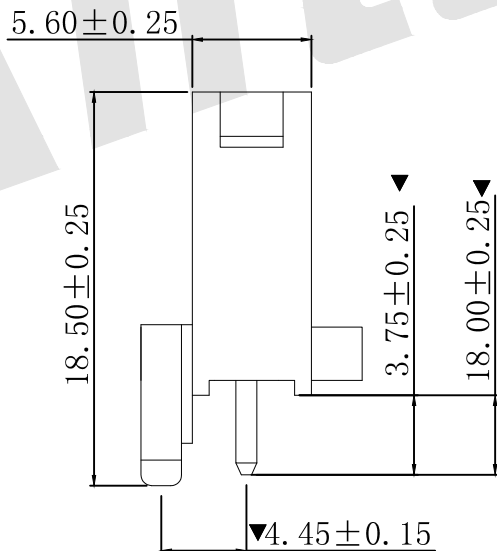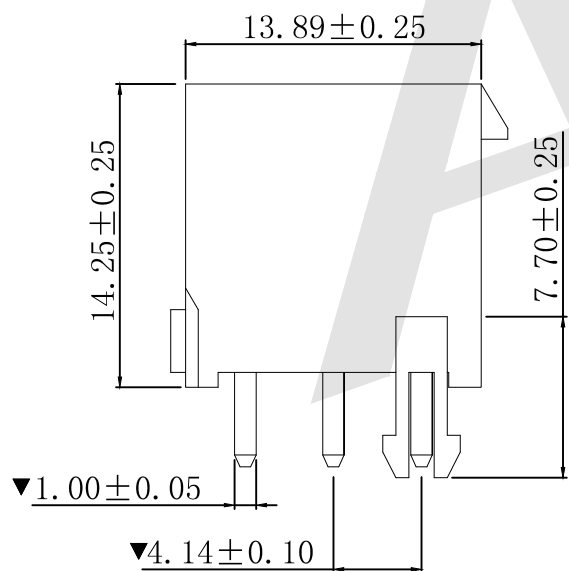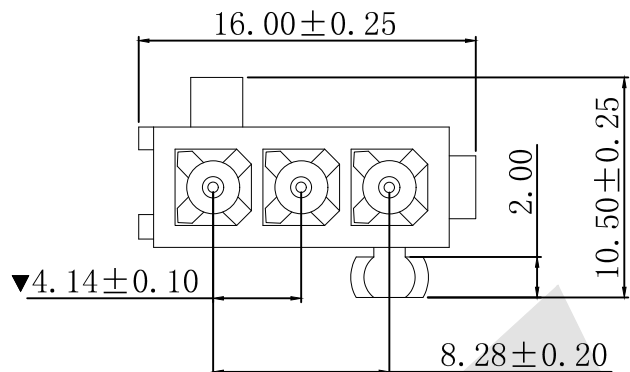

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15

**Antenk**® ANTENK ELECTRONICS CO., LTD  
[Http://www.antenk.com](http://www.antenk.com)  
 E-mail:sales@antenk.com

SCALE: As Shown	UNIT: mm
DRAW Jack Bao	DATE 08/14/2017
CHECK Bob Yang	DATE 08/14/2017

TITLE:  
AMP4.14mm 180° Wafer Connector Series



DRAWING NO: AW4141V-1x03P  
 PRODUCT NO: AW4141V-1x03P

REV	DESCRIPTION	DATE