



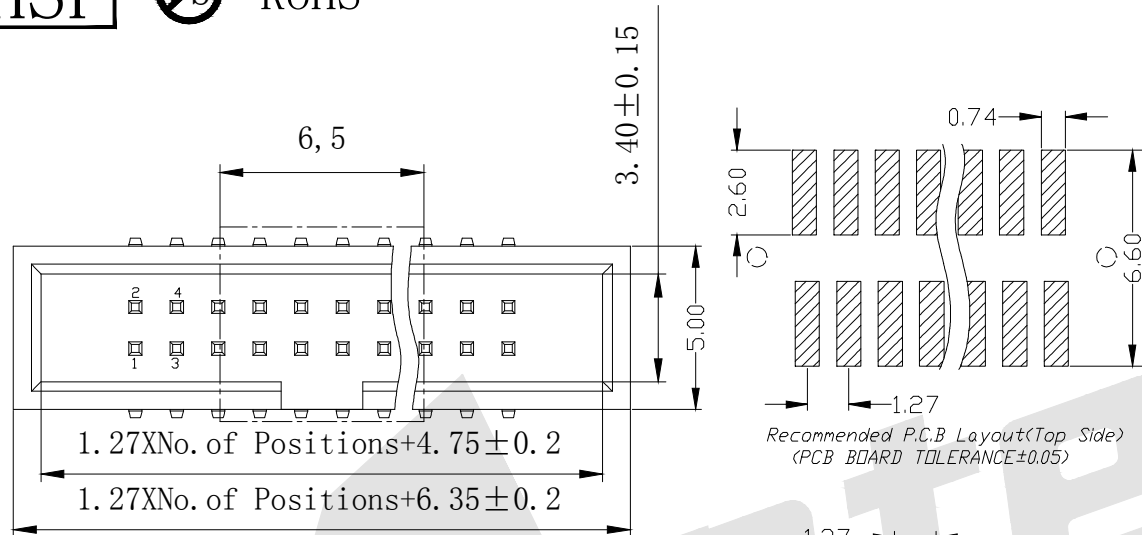

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

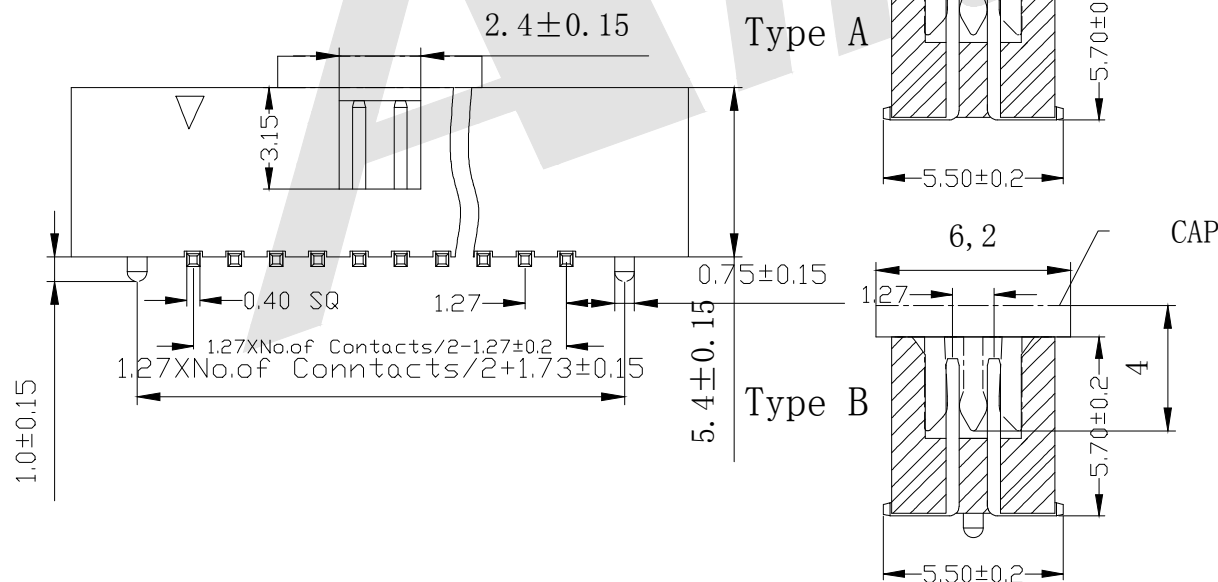

SPECIFICATION

Current Rating: 1Amp
Insulation Resistance: 1000MΩmin
Contact Resistance: 20mΩmax
Withstand Voltage: 500V AC/DC
Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Insulator Material: PA6T+30%GF UL 94V-0
Operating Temperature: -40° C to +105° C
Available For Poles at Present: 4P, 10P, 12P, 20P, 22P, 24P, 26P, 30P, 40P, 44P

Ordering Code:

BHAM05 - X - X - X - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
② No. of Contacts: 10-100P
③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
④ Color Insulator
B:Black
U:Blue
W:White
⑤ Insulator Material
B:PA6T
C:LCP
E:PA9T
⑥ Packing
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP
⑦ With locating pegs option
A:Type A without pegs
B:Type B with pegs

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
DRAW: Wu Feng Rong DATE: 01/05/2016
CHECK: BobYang DATE: 01/05/2016



Antenk® ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
1.27mm Box Header SMT,H=5.4mm

DRAWING NO: BHAM05-XXXXXXX

PRODUCT NO: BHAM05-XXXXXXX

Available For Poles at Present

REV DESCRIPTION DATE