

HSF



NOTE:

ELECTRICAL:

1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIONHMS MAX
4. INSULATION RESISTANCE:1000MEGOHMS MI @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE: -40°C TO +85°C
  2. OPERATION:0°C TO +70°C
- CONFORM TO TIA/EIA 568 B.2-1  
MATES WITH MODULAR PLUG CONFORMING TO  
FCC PART 68, SUBPART F

MECHANICAL:


1. HOUSING MATERIAL:PC UL94V-0
2. INSERT MATERIAL:PBT+20%GF UL94V-0
3. PCB MATERIAL:FR-4 THICKNESS:1.6mm
4. CONTACT MATERIAL:PHOSPHOR BRONZE STAMP  
PIN T=0.35mm
5. IDC CONTACT MATERIAL:PHOSPHOR BRONZE  
T=0.50mm WITH SILVER OR TIN OR NICKEL PLATING
6. WIRE :AWG 24~26

Ordering Code:

RJKS - 006  
①                      ②

① Series:Keystone Jacks

② Serial Number:006

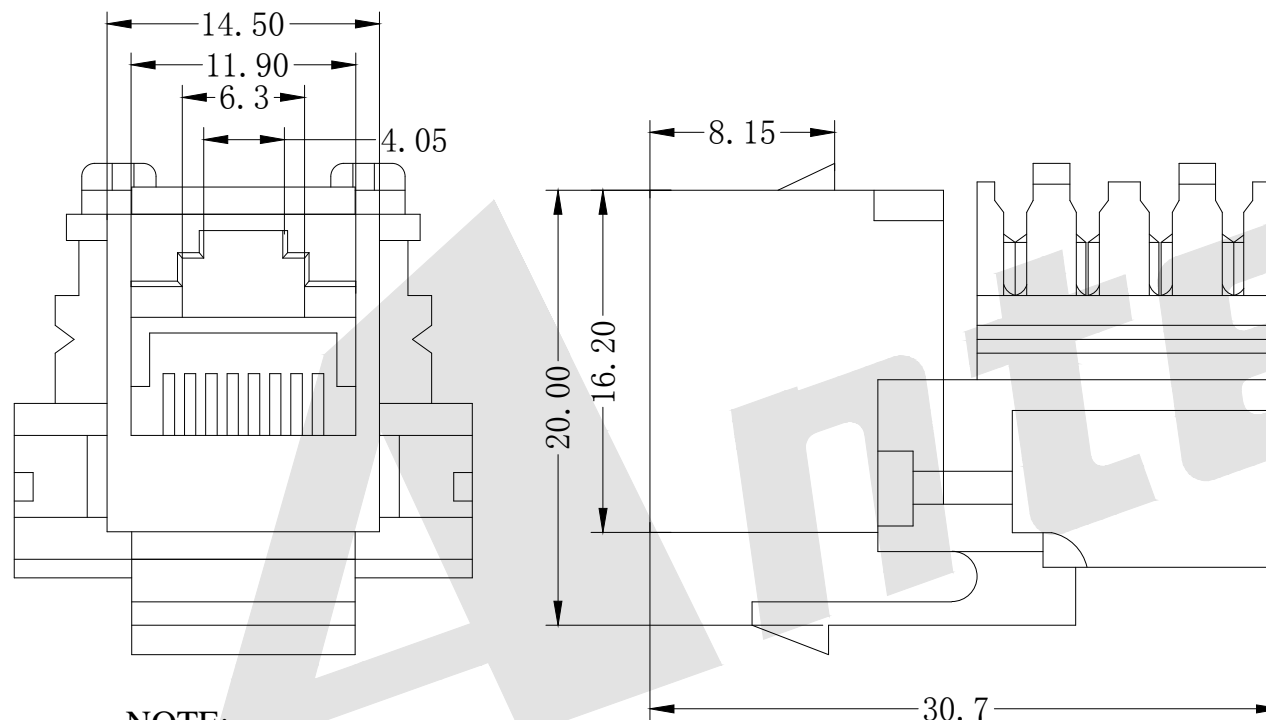


NOTE:  
TOLERANCE:±0.2mm

Unless Otherwise specified tolerance  
X. ±0.35    X.XX: ±0.20  
X.X: ±0.25    X.XXX: ±0.15

**Antenk**® ANTENK ELECTRONICS CO.,LTD  
Http://www.antenk.com  
E-mail:sales@antenk.com

SCALE: As Shown	UNIT: mm
DRAW Wu Feng Rong	DATE 22/03/2018
CHECK BobYang	DATE 22/03/2018

TITLE:  
CAT5E 90° Keystone Jack



DRAWING NO: RJKS-006  
PRODUCT NO: RJKS-006

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		