

HSF



SPECIFICATION

CURRENT RATING : 3A AC/DC

PITCH BETWEEN POLES: 2.0mm

VOLTAGE RATING: 250V AC/DC

TEMPERATURE RANGE: -25°C TO +85°C

INSULATION RESISTANCE: 2,000Ω MIN




WITHSTAND VOLTAGE: 800V AC/MINUTE

APPLICABLE WIRE: AWG#26 TO #30

FEATURES

AVAILABLE NUMBER OF CIRCUITS: 22WAYS

MATERIAL: PA66

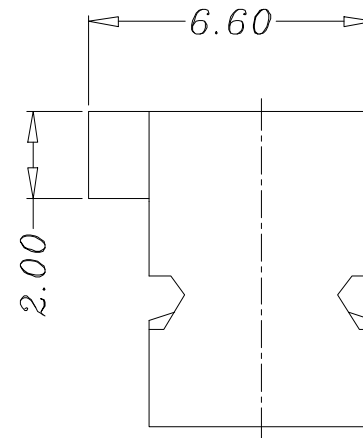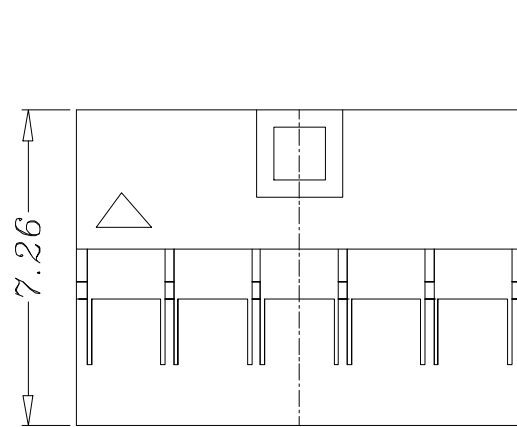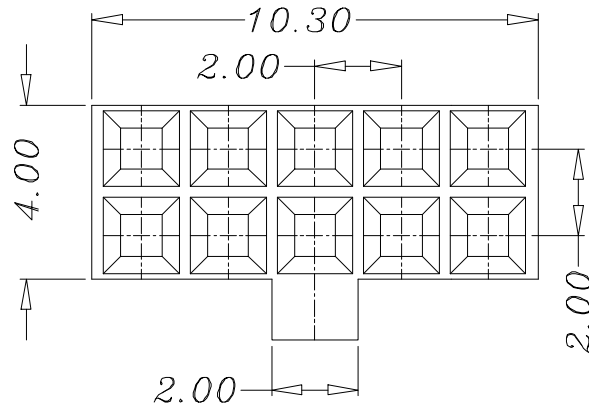

POLES	PART NO	DIMENSION	POLE	PART NO	
		A(mm)			
2X2	2.00-2HX2P	4.3	2X14	2.00-2HX14P	28.30
2X3	2.00-2HX3P	6.30	2X15	2.00-2HX15P	30.30
2X4	2.00-2HX4P	8.30	2X16	2.00-2HX16P	32.30
2X5	2.00-2HX5P	10.30	2X17	2.00-2HX17P	34.30
2X6	2.00-2HX6P	12.30	2X18	2.00-2HX18P	36.30
2X7	2.00-2HX7P	14.30	2X19	2.00-2HX19P	38.30
2X8	2.00-2HX8P	16.30	2X20	2.00-2HX20P	40.30
2X9	2.00-2HX9P	18.30	2X21	2.00-2HX21P	42.30
2X10	2.00-2HX10P	20.30	2X22	2.00-2HX22P	44.30
2X11	2.00-2HX11P	22.30	2X23	2.00-2HX23P	46.30
2X12	2.00-2HX12P	24.30	2X24	2.00-2HX24P	48.30
2X13	2.00-2HX13P	26.30	2X25	2.00-2HX25P	50.30

Unless otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Antenk® ANTENK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail:sales@antenk.com

SCALE: As Shown UNIT: mm
 DRAW Tmx DATE 12/24/2021
 CHECK Bob Yang DATE 12/24/2021

TITLE: Dupont 2.0 housing, Dual row, with boss



DRAWING NO: AH2005-2XNP-B

PRODUCT NO: AH2005-2XNP-B

REV	DESCRIPTION	DATE