
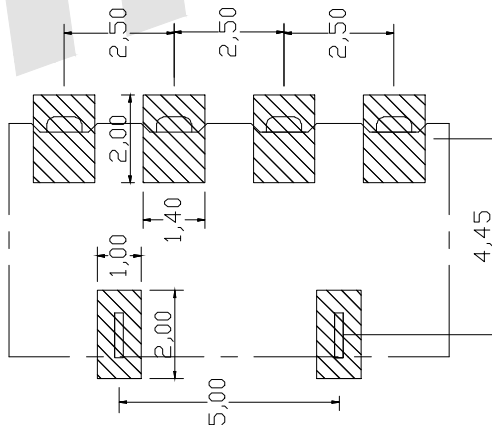
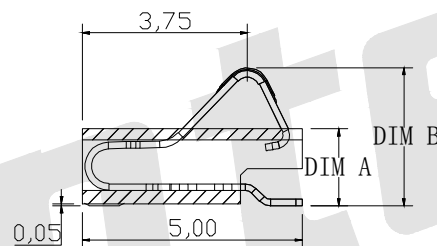
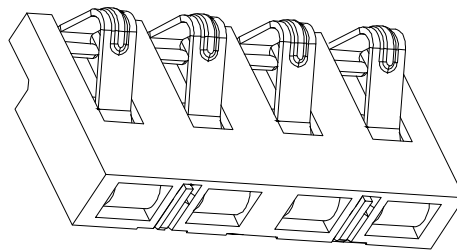
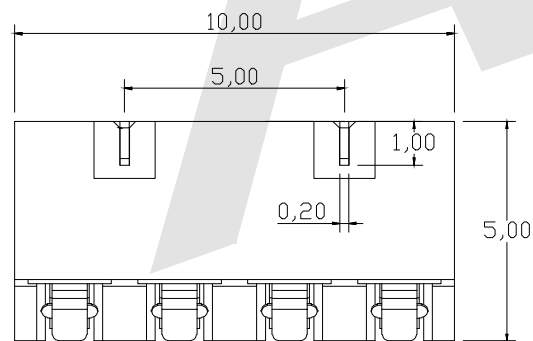
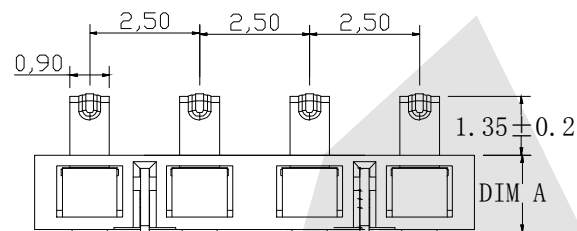


HSF

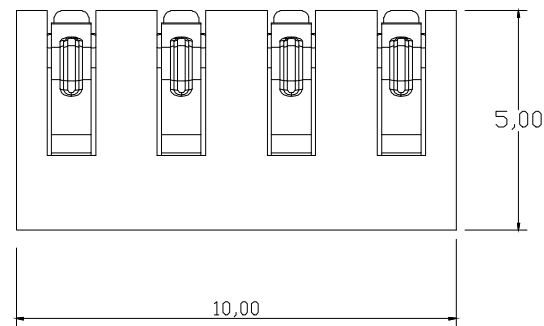

RECOMMENDED PCB LAYOUT
TOP VIEW (.XX±0.05)

NOTES:

1. ELECTRICAL PERFORMANCES:

1=1. RATING CURRENT: 2A.

1-2. RATING VOLTAGE: 12V

1-3. CONTACT RESISTANCE: 30mΩ

1-4. INSULATION RESISTANCE: 500MΩ

2-3. OPERATION TEMPERATURE: -40° C ~ +85° C

HOUSING: LCP

TERMINAL: PHOSPHOR COPPER GOLD PLATED


Ordering Code:

ABT24 - 04 - L - B - X - D
① ② ③ ④ ⑤ ⑥

- | | |
|-----------------------|--------------------|
| ① Series No: | ⑤ Contact Plating: |
| ② No. of Contacts | G0: Gold flash |
| 04: 04Pin | G1: 3u" gold |
| ③ Insulator Material: | G2: 5u" gold |
| P: PBT+30%GF | G3: 10u" gold |
| L: LCP | G4: 15u" gold |
| ④ Pitch | G5: 30u" gold |
| B: 2.5mm Pitch | ⑥ Packing: |
| | A: Tray |
| | B: Bag |
| | C: Tube |
| | D: Tape Reel |

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:
As Shown
DRAW
Wu Feng Rong
CHECK
BobYang



UNIT:
mm
DATE
10/03/2020
DATE
01/13/2019

Antenk® ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE:
2.5mm Pitch 4P Battery Connector SMT

DRAWING NO: ABT24-04LBXD

PRODUCT NO: ABT24-04LBXD

REV

DESCRIPTION

DATE