

HSF



ROHS

NO.	ITEM	MATERIAL	COLOR	REMARKS
3	SHELL	SPCC	—	GOLD OR NICKEL PLATED
2	TERMINAL	C2680	—	GOLD/TIN PLATED
1	HOUSING	LCP	BLACK	UL 94V-0

NONES:

1. ELECTRICAL:

1) CONTACT RESISTANCE: 30mΩ MAX (INITIAL) FOR VBUS AND GND CONNECTS, OTHER 50mΩ MAX (INITIAL)

Changes after environmental and life testing : +10Ω MAX

2) INSULATION RESISTANCE: 100MΩ MIN.

3) RATED CURRENT: 1.5A

4) WITHSTAND VOLTAGE: 100V AC (RMS)

2. MECHANICAL

1) INSERT FORCE: 35N MAX.

2) WITHDRAWAL FORCE: 10N (INITIAL) MIN.
AFTER RECYCLE TEST: 8N MIN.

3) CYCLE LIFE: 5000 CYCLES

3. ENVIRONMENTAL CHARACTERS: TEMPERATURE RANGE: -40°C ~ +85°C

4. Conforms to the company's environmental substance management standards

Ordering Code:

DP - F - X - X - 13
① ② ③ ④ ⑤

① Series No:

② Male / female:

F: female

③ Contact Plating:

1: Selective 1u"

2: Selective 3u"

3: Selective 5u"

4: Selective 15u"

5: Selective 30u"

6: All Gold

④ Shell Plating:








1: Nickel Plated

2: Tin-Nickel Plated

3: Gold Plated

⑤ Series Numer:

13

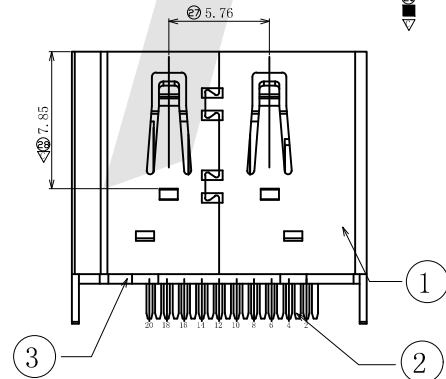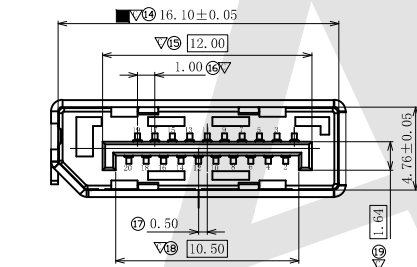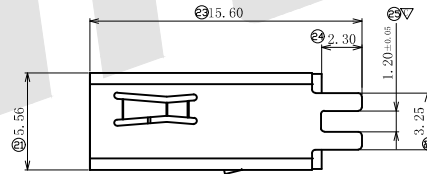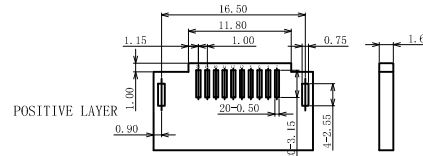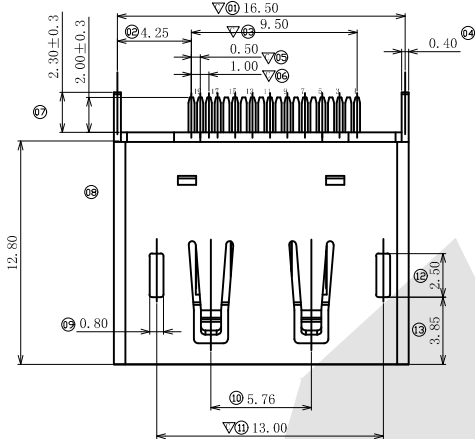


Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm

DRAW ZLA DATE 26/03/2022

CHECK BobYang DATE 26/03/2022



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: Display Port Female Straddle 1.2mm, SPCC Shell, Without Edge Curl

DRAWING NO: DP-FXX13

PRODUCT NO: DP-FXX13

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8