


HSF

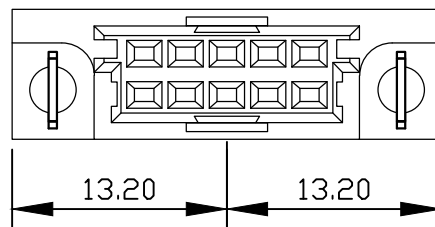

L	Dip Length
A	2.5
B	4.0
C	13.0
D	15.0
E	17.0
F	19.4

SPECIFICATION

Current Rating: 2.0Amp

Insulation Resistance: 100000MΩ min.at DC 100V

Contact Resistance: 20MΩ max

Withstand Voltage: AC 1000V For 1 Minute

Operating Temperature: -55° C to +105° C

Contact Material: Brass

Contact Plating: Au or Sn Over Ni

Insulator Material: PBT+30%GF UL 94V-0

Insertion Force: 64 pin max.60N

Withdrawal Force: 0.15N min.per individual contact

Ordering Code:

DFS - X - X - X - X - 210 - L

①	②	③	④	⑤	⑥	⑦
---	---	---	---	---	---	---

① Series No:

② No. of Contacts

5p 10p

③ DIP LENGTH

A:2.5MM

B:4.0MM

C:13.0MM

D:15.0MM

E:17.0MM

F:19.4MM

④ Rows Loaded With Contacts

A:Row a+b

B:Row - b

⑤ Contact Plating

G0: Gold flash

S0: Gold flash/Ni

G1: 3u" Gold

S1: 3u" Gold/Ni

G2: 5u" Gold

S2: 5u" Gold/Ni

G3: 10u" Gold

S3: 10u" Gold/Ni

G4: 15u" Gold

S4: 15u" Gold/Ni

G5: 30u" Gold

S5: 30u" Gold/Ni

SN: Tin





⑥ Series

number

210

⑦ Blank:W/O Lock

L:With Lock

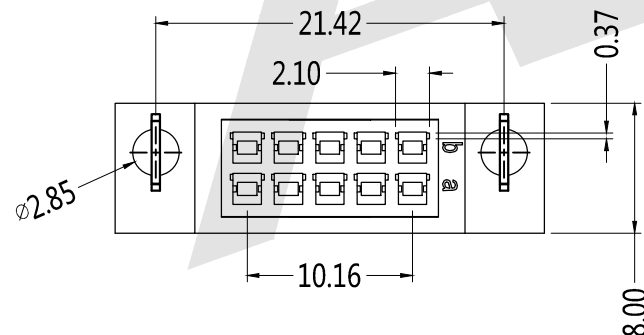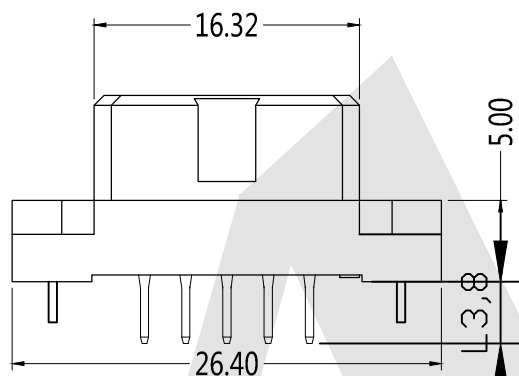

Pitch	Position	Rows with Contacts	Contact Arrange
2.54	10	a b	a 1 2 3 4 b 1 2 3 4
	5	- b	a 1 2 3 4 b 1 2 3 4


Unless Otherwise specified tolerance

X.±0.35 X.XX±0.20
X.X±0.25 X.XXX±0.15

SCALE: As Shown UNIT: mm

DRAW Wu Feng Rong DATE 19/12/2019

CHECK BobYang DATE 13/03/2019



ANTENK ELECTRONICS CO.,LTD

Http://www.antenk.com

E-mail:sales@antenk.com

TITLE:

DIN 41612 Vertical Female Type
B Connectors 10 Positions

DRAWING NO: DFS-XXXX-210-L

PRODUCT NO: DFS-XXXX-210-L

REV

DESCRIPTION

NAME

DATE