


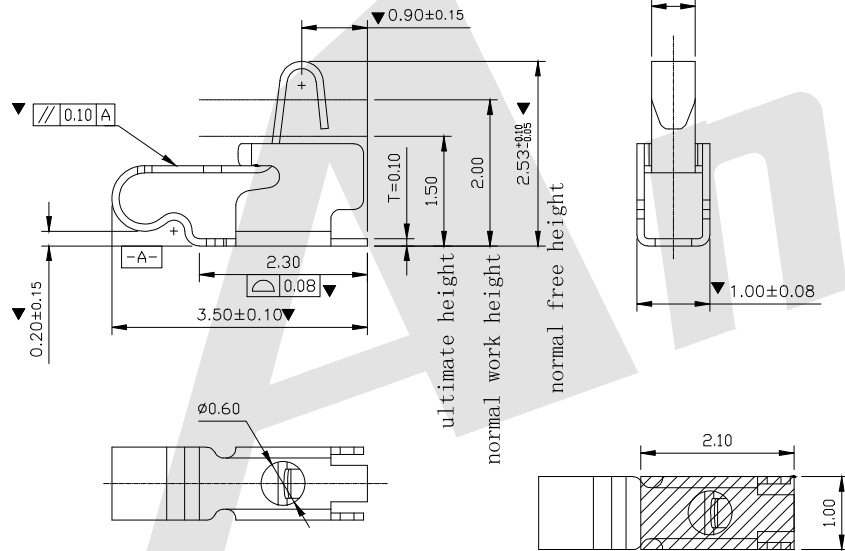




∅0.90 PICK UP AREA



Bonding pad size
dimensional tolerance ±0.05

Notes:

- 1: Material:
Spring: stainless steel
- 2: Plating:
Spring: 50~80u' Ni
Contact area: 1u' Au over 50~80u' Ni
- 3: Electrical:
Rated Current & Voltage: DC 1A, 12V
Contact Resistance: 50 mΩ Max. at working height.
- 4: Mechanical:
Force: 60~80g at working height.
Durability: 1000 cycles (min)
- 5: Work Temperature:
Withstanding Highest Temperature: 280°C
Operational Temperature: -20°C ~ +70°C

SF - 035 - X - X - 18
 ① ② ③ ④ ⑤

- ① Series No. :
SF: Spring Finger
- ② Length:
035: 3.5mm
- ③ Packing Method:
A: Tray R: Tape & Reel B: Bag
- ④ Plating
A: 1u" Au Plated over 50~80u Ni
B: 3u" Au Plated over 50~80u Ni
C: Sn Plated over Ni
- ⑤ Serial Number:
18

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Antenk ANTENK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail: sales@antenk.com

SCALE: As Shown UNIT: mm

DRAW ZLA DATE 01/04/2022

CHECK BobYang DATE 01/04/2022

TITLE:
Spring Finger L=3.5MM



DRAWING NO: SF-035-X-X-18

PRODUCT NO: SF-035-X-X-18

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8