HSF Pb RoHS

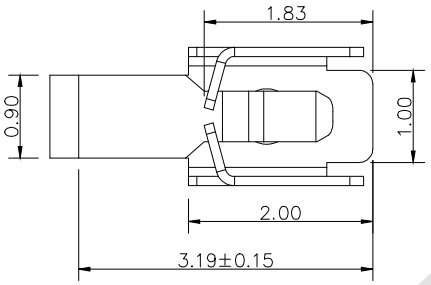



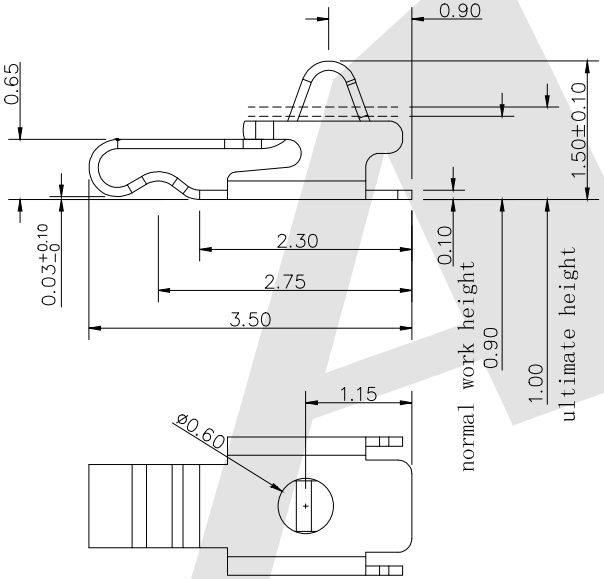





RECOMMENDED PCB LAYOUT

Notes:
1: Material:
Spring: BeCu(C1720)
2: Plating:
Spring:50~80u' Ni
Contact area:1u' Au over 50~80u' Ni
3: Electrical:
Rated Current&Voltage:DC 1A,12V
Contact Resistance: 50 mΩ Max. at working height.
4: Mechanical:
Force: 60~80g at working height.
Durability: 1000 cycles (min)
5: Work Temperature:
Withstanding Highest Temperature: 280℃
Operational Temperature:-20℃~ + 70℃

SF ① - 035 ② - X ③ - X ④ - 15 ⑤

① Series No.:
SF:Spring Finger

② Length:
035:3.5mm

③ Packing Method:
A:Tray R:Tape & Reel B:Bag

④ Plating
A:1u″ Au Plated over 50~80u Ni
B:3u″ Au Plated over 50~80u Ni
C:Sn Plated over Ni

⑤ Serial Number:
15

REV	DESCRIPTION	DATE

Unless Otherwise specified tolerance
X. ±0.35 X.XX:±0.20
X.X:±0.25 X.XXX:±0.15

SCALE: As Shown	UNIT: mm
DRAW ZLA	DATE 01/04/2022
CHECK BobYang	DATE 01/04/2022

3rd ANGLE PROJECTION

ANTENK ELECTRONICS CO,.LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: Spring Finger L=3.5MM

DRAWING NO: SF-035-X-X-15

PRODUCT NO: SF-035-X-X-15

Antenk