


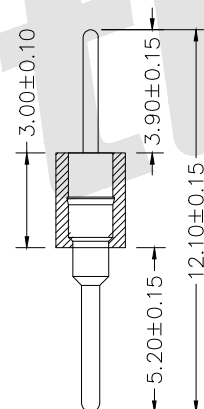


HSF

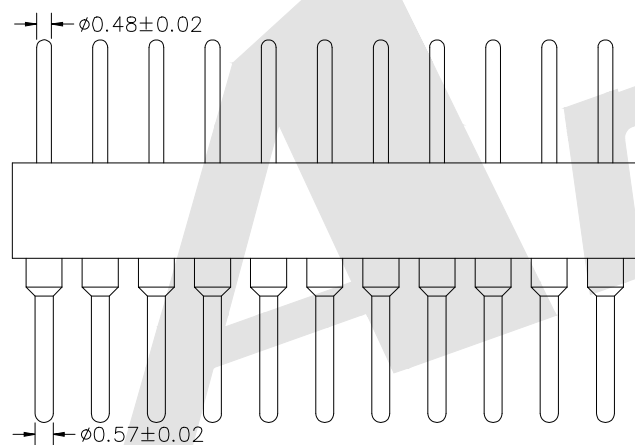

**SPECIFICATIONS:**

Insulator: PPS  
 Flammability: UL 94V-0  
 Sleeve: Brass  
 Mating pin Ø: 0.45 mm  
 Mechanical life: min 500 cycles  
 Rated current: 1A  
 Contact resistance: max 10 mΩ  
 Dielectric strength: min 1000V RMS

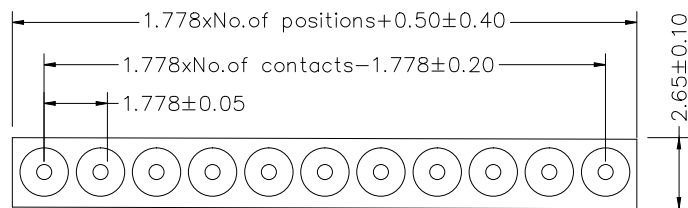

**P. C. B LAYOUT**

Ordering Code:

MPHHS - X - X - X - A02  
 ① ② ③ ④ ⑤


- ① MPHHS series
- ② Contact NO:  
XX=XXpin  
For example:  
06=06pin
- ③ Pin Plated  
0; No  
1; Tin 150 μ"  
2; Tin 200 μ"  
3; G/F  
4; Gold 3 μ"  
5; Gold 10 μ"  
6; Gold 15 μ"  
S; Special
- ④ Packing  
A:Tray B:Bag  
C:Tube D:Tape Reel
- ⑤ Series number  
A02

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15

**Antenk**® ANTENK ELECTRONICS CO., LTD  
 Http://www.antenk.com  
 E-mail:sales@antenk.com

SCALE: As Shown UNIT: mm  
 DRAW TMX DATE 12/06/2021  
 CHECK BobYang DATE 12/06/2021

TITLE: Machined Pin header connectors 1.778 mm  
 single row MPHHS series



DRAWING NO: MPHHS-XXXA02

PRODUCT NO: MPHHS-XXXA02

REV	DESCRIPTION	DATE