

HSF



RoHS

SPECIFICATION

Current Rating: 1.5 Amp
Insulation Resistance: 1000M ohms min
Contact Resistance: 20M ohms max
Dielectric Withstanding: AC500V
Operating Temperature: -65°C to +125°C
Contact Material: Brass
Insulator Material: PBT,UL 94V-0 Black

Ordering Code:

PHEU05 - $\frac{X}{1}$ - $\frac{X}{2}$ - $\frac{S}{3}$ - $\frac{X}{4}$ - $\frac{X}{5}$ - $\frac{X}{6}$

① Series No:

② No. of Contacts
1-40Pin

③ Contact Plating:

G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin





④ Connector Type
S:Single

⑤ Insulator Material

A:PBT
B:PA6T
C:LCP
D:PA46
E:PA9T

⑥ Packing:

A:Tray B:Bag
T:Tube U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

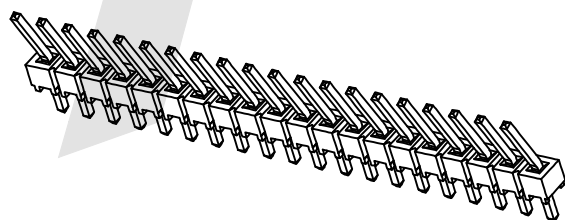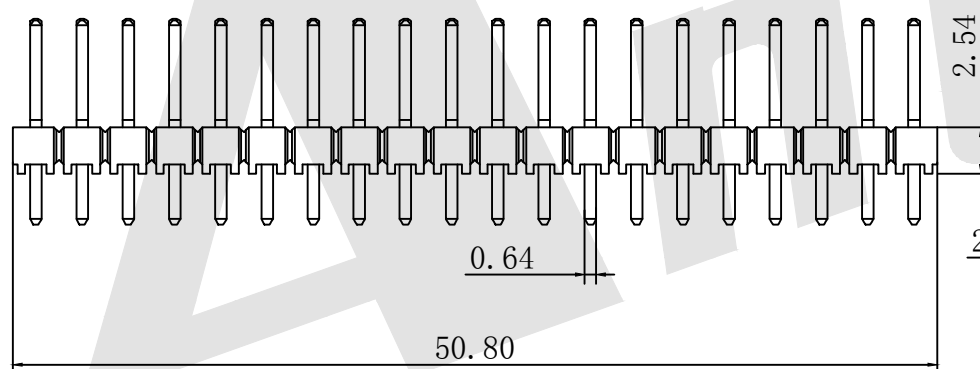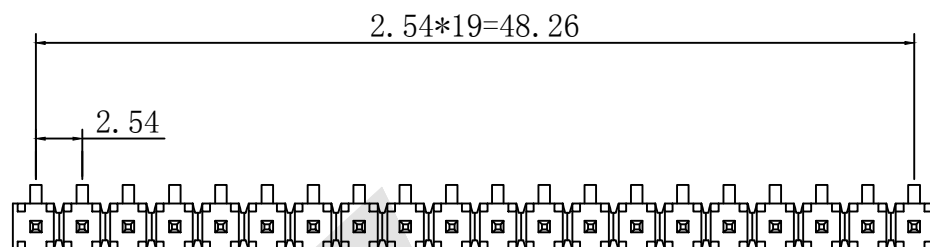

Standard IE P/N :

PHEU05-10-G0-S-A-B

Unless Otherwise specified tolerance

X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:

As Shown

UNIT:

mm

DRAW

YG ZHONG

DATE

01/05/2016

CHECK

BobYang

DATE

01/05/2016



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:


BOARD STACKER 1-40 pin BENDED

DRAWING NO:

PHEU05-XXSXX

PRODUCT NO:

PHEU05-XXSXX



3rd ANGLE PROJECTION

Increase packing method and material

2016/10/25

REV

DESCRIPTION

DATE