

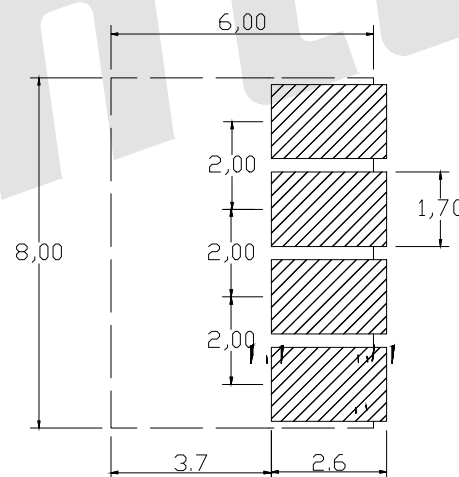
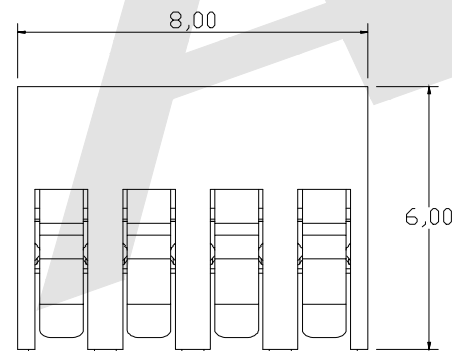
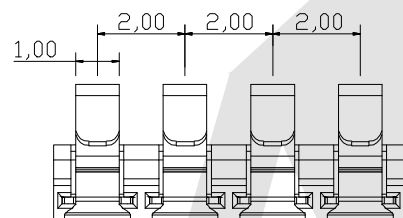
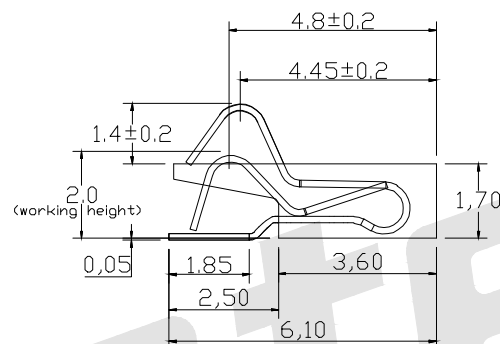


HSF

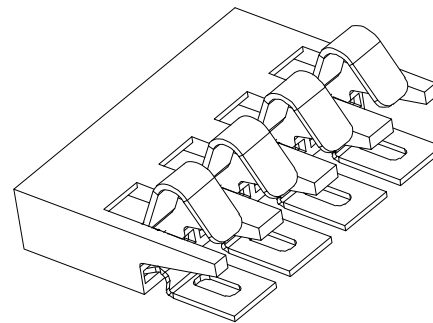

ROHS

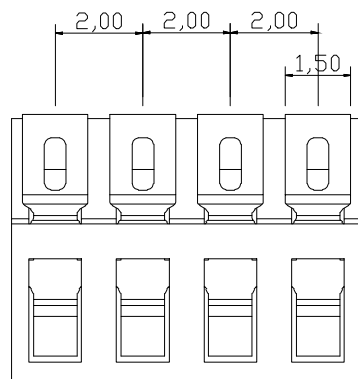

RECOMMENDED PCB LAYOUT
TOP VIEW (. XX ± 0.05)

SPECIFICATIONS:

VOLTAGE RATING: 12 V
CURRENT RATING: 2.0 A
WITHSTAND VOLTAGE: 500 V
INSULATION RESISTANCE: 1000 MEG OHM MIN
CONTACT RESISTANCE: 30 MILL. OHM MAX
OPERATION TEMPERATURE: -40° C TO +85° C
PLASTIC MATERIAL: LCP
CONTACT POINT MATERIAL:
PHOSPHOR COPPER, GOLD PLATING


Ordering Code:

ABT30 - 04 - L - A - X - D
① ② ③ ④ ⑤ ⑥

- ① Series No:
② No. of Contacts
04: 04Pin
③ Insulator Material:
P: PBT+30%GF
L: LCP
④ Pitch
A: 2.0mm Pitch
⑤ Contact Plating:
G0: Gold flash
G1: 3u" gold
G2: 5u" gold
G3: 10u" gold
G4: 15u" gold
G5: 30u" gold
⑥ Packing:
A: Tray
B: Bag
C: Tube
D: Tape Reel

Unless Otherwise specified tolerance
X. XX: ±0.20
X. X: ±0.25 X. XXX: ±0.15

SCALE:
As Shown
DRAW
Wu Feng Rong
CHECK
BobYang
DATE
23/06/2020
DATE
23/06/2020



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE:

2.0PITCH 4PIN BATTERY CONNECTOR

DRAWING NO: ABT30-04LAXD

PRODUCT NO: ABT30-04LAXD

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8