

HSF



ROHS

Specifications:
 Part No. :AH2508V-F-XP
 Voltage rating:250V AC/DC
 Current rating:3A AC/DC
 Withstanding voltage:1000V AC/minute
 Temperature range: -25°C~+85°C
 Insulation resistance:≥1000MΩ
 Contact resistance: ≤10mΩ
 After environmental testing :≤20mΩ
 Material:Pa66 UL94-V0
 Qty/Bag:1000Pcs

Ordering information:


AH2508V-F-XP - XX - 02
 1 2 3

1. Part No.

2. Color:

(blank)-Ivory
 BK-Black BR-Brown
 RD-Red GY-Gray
 BL-Blue PK-Pink
 YL-Yellow LY-Lemon yellow
 GN-Green P-Purple
 OR-Orange LE-Light Blue
 WH-White FY-Vivid yellow

3. Series No.

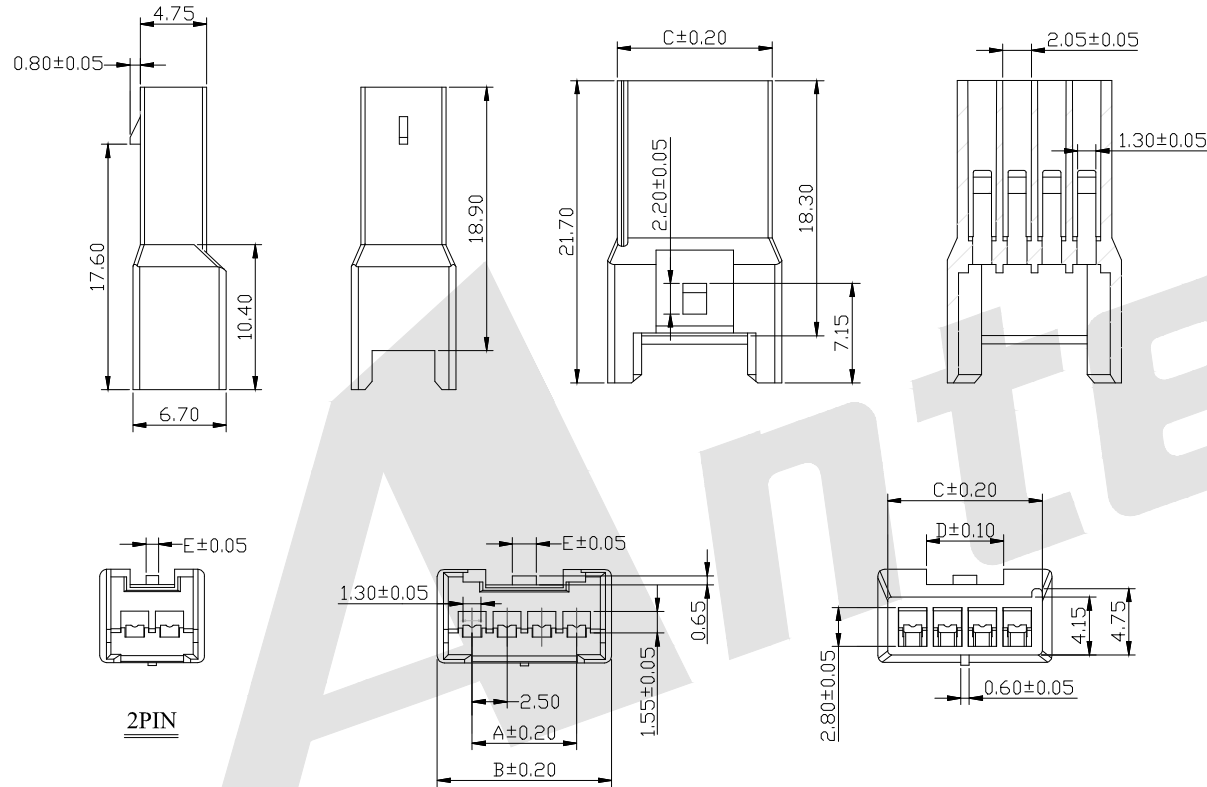

Poles	Dimensions (mm)				
	A	B	C	D	E
2	2.50	7.50	6.10	3.20	0.80
3	5.00	10.00	8.60	4.80	1.60
4	7.50	12.50	11.10	5.40	1.60
5	10.00	15.00	13.60	5.40	1.60
6	12.50	17.50	16.10	5.40	1.60
7	15.00	20.00	18.60	5.40	1.60
8	17.50	22.50	21.10	5.40	1.60
9	20.00	25.00	23.60	5.40	1.60
10	22.50	27.50	26.10	5.40	1.60
12	27.50	32.30	30.65	5.40	1.60
14	32.50	37.30	35.65	5.40	1.60


Unless Otherwise specified tolerance

X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm

DRAW ZLA DATE 20/04/2022

CHECK BobYang DATE 20/04/2022



Antenk ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE:
 2.5mm Pitch Female Single row Housing
 Connector

DRAWING NO: AH2508V-F-XP-XX-02

PRODUCT NO: AH2508V-F-XP-XX-02

REV	DESCRIPTION	DATE

1 2 3 4 5 6 7 8