HSF Pb RoHS

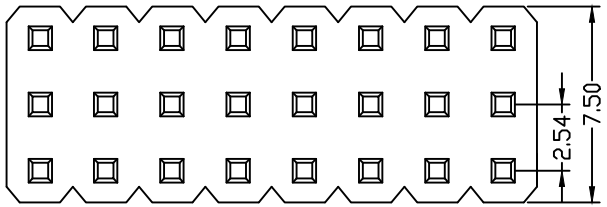

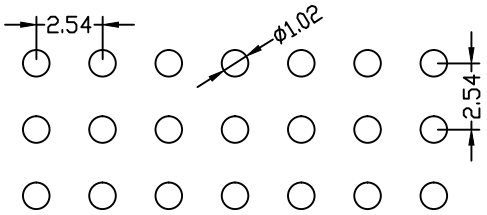

PCB LAYOUT

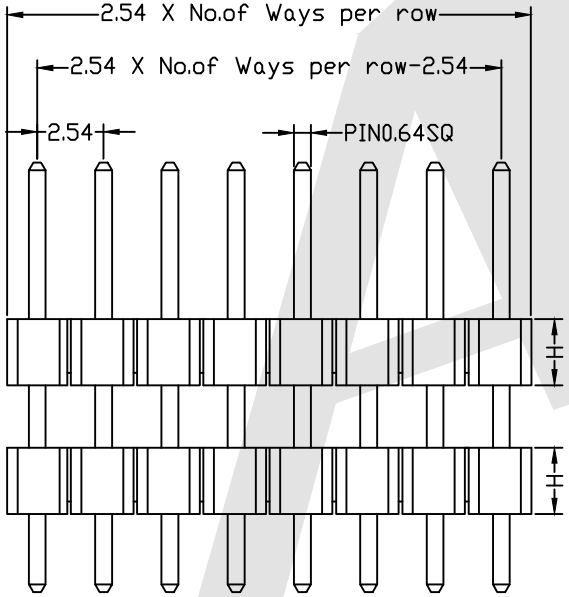

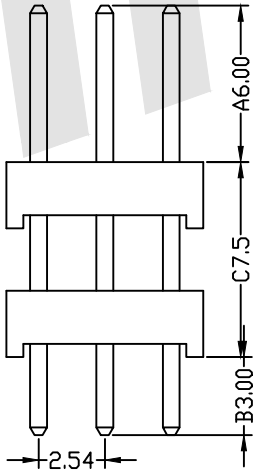

SPECIFICATION

Current Rating:	3 Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65°C to +125°C
Contact Material:	Brass
Insulator Material:	PBT,UL 94V-0 Black

Ordering Code:

PHES09 - X - X - T - A-C-B - X - X - X

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No:

② No.of Contacts
03 To 120

③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u "Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin

④ Connector Type
T:Three

⑤ Pin Length:
A:0600=6.00mm
C:0750=7.50mm
B:0300=3.00mm
Please mark the desired length in the A/C/B

⑥ Insulator Material
A:PBT
B:PA6T
C:LCP
D:PA46
E:PA9T

⑦ Packing:
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

⑧ Plastic High
H1:1.70mm
H2:2.54mm
H3:2.00mm
H4:1.50mm

Standard IE P/N : PHES09-10-G0-T-0600-0750-0300-A-B-H2

A	C	B
6.0	7.50	3.0
Optional		

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown
UNIT: mm
DRAW Mo Guo Xuan DATE 11/12/2018
CHECK BobYang DATE 11/12/2018

3rd ANGLE PROJECTION

ANTENK ELECTRONICS CO,.LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: 2.54mm Pin Header Three Row Double Plastic Straight Type

DRAWING NO: PHES09-XXT-0600-0750-0300-XXX
PRODUCT NO: PHES09-XXT-0600-0750-0300-XXX

REV	DESCRIPTION	DATE
	Increase packing method and material	2016/10/25