







### SPECIFICATION

Current Rating: 3.0 Amp  
 Insulation Resistance: 1000M ohms min  
 Contact Resistance: 20M ohms max  
 Dielectric Withstanding: AC500V  
 Operating Temperature: -65°C to +125°C  
 Contact Material: Brass  
 Insulator Material: PA6T,UL 94V-0 Black

#### Ordering Code:

PC104E09 - 10 - X - D - X - X - X  
 (1) (2) (3) (4) (5) (6) (7)

- ① Series No:
- ② No.of Contacts  
10
- ③ Contact Plating:  
G0:Gold flash S0:Selective  
G1:3U" Gold S1:Selective 3u"  
G2:5u" Gold S2:Selective 5u"  
G3:10u"Gold S3:Selective 10u"  
G4:15u" Gold S4:Selective 15u"  
G5:30u" Gold S5:Selective 30u"  
SN:Tin
- ④ Connector Type  
D: Dual
- ⑤ Plastic High:  
H:8.9  
Please mark the desired length in the H
- ⑥ Insulator Material  
A:PBT  
B:PA6T  
C:LCP  
D:PA46  
E:PA9T
- ⑦ Packing  
A:Tray  
B:Bag  
T:Tube  
U:Tube+CAP  
R:Tape&Reel  
W:Tape&Reel+CAP

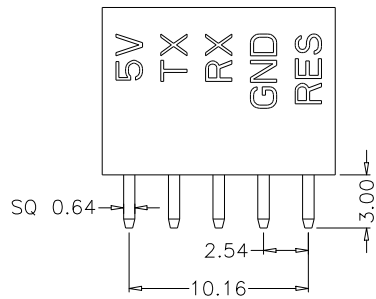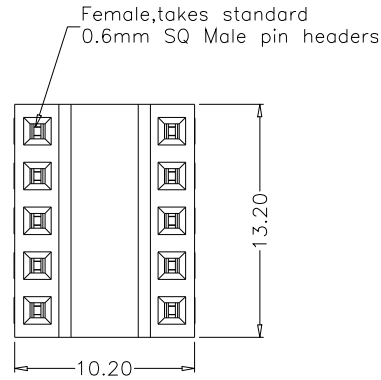

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15

**Antenk** ANTENK ELECTRONICS CO., LTD  
[Http://www.antenk.com](http://www.antenk.com)  
 E-mail:sales@antenk.com

SCALE: As Shown UNIT: mm  
 DRAW GONG FENG DATE 11/02/2021  
 CHECK BobYang DATE 11/02/2021

TITLE: 2.54 mm Female Header 2x5P Straight Type H=8.9



DRAWING NO: PC104E09-10XDXXX  
 PRODUCT NO: PC104E09-10XDXXX

		Correct dimension 9.5 to 8.9	01/03/2022
REV		DESCRIPTION	DATE