

HSF



ROHS

SPECIFICATIONS

- Voltage rating: 250V AC,DC
- Current rating: 3A AC,DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -40°C~+105°C


WAFER

- Part NO: AW2504R-xP
- Material: Pin: Brass/Tin over Nickel
Insulator: Nylon 66, UL94V-0
- Mates with: AH2504 series Housing
- Color: White

Ordering Information & Dimensions

PART NO.	Dimensions
	A
AW2504R-2P	2.50
AW2504R-3P	5.00
AW2504R-4P	7.50
AW2504R-5P	10.00
AW2504R-6P	12.50
AW2504R-7P	15.00
AW2504R-8P	17.50
AW2504R-9P	20.00
AW2504R-10P	22.50
AW2504R-11P	25.00
AW2504R-12P	27.50
AW2504R-13P	30.00
AW2504R-14P	32.50
AW2504R-15P	35.00
AW2504R-16P	37.50
AW2504R-17P	40.00
AW2504R-18P	42.50
AW2504R-19P	45.00
AW2504R-20P	47.50
AW2504R-21P	50.00
AW2504R-22P	52.50
AW2504R-23P	55.00
AW2504R-24P	57.50
AW2504R-25P	60.00

Unit: mm

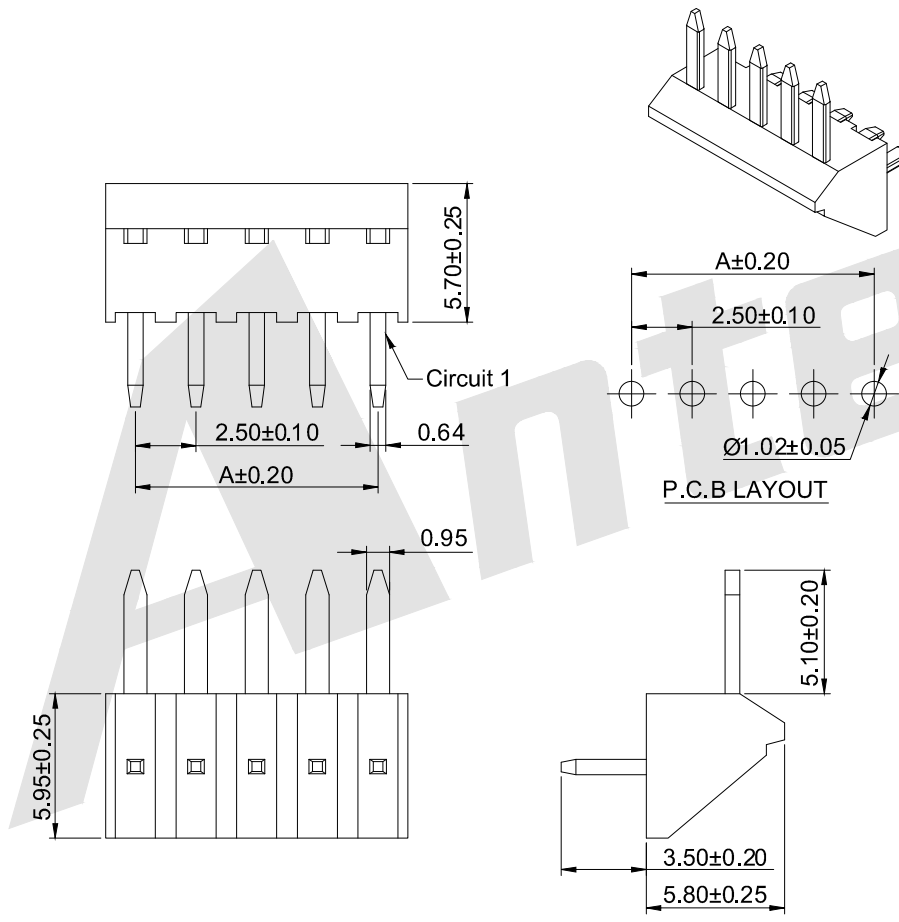


Unless Otherwise specified tolerance
 X. ± 0.35 X.XX: ± 0.20
 X.X: ± 0.25 X.XXX: ± 0.15



ANTENK ELECTRONICS CO.,LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail:sales@antenk.com

SCALE: As Shown	UNIT: mm
DRAW Jack Bao	DATE 5/2/2018
CHECK Bob Yang	DATE 5/2/2018

TITLE: 2.50mm pitch 90° Wafer Connector Series



DRAWING NO: AW2504R-xP

PRODUCT NO: AW2504R-xP

REV	DESCRIPTION	DATE