

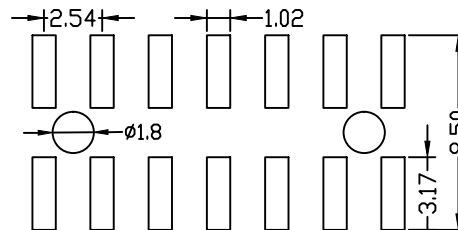
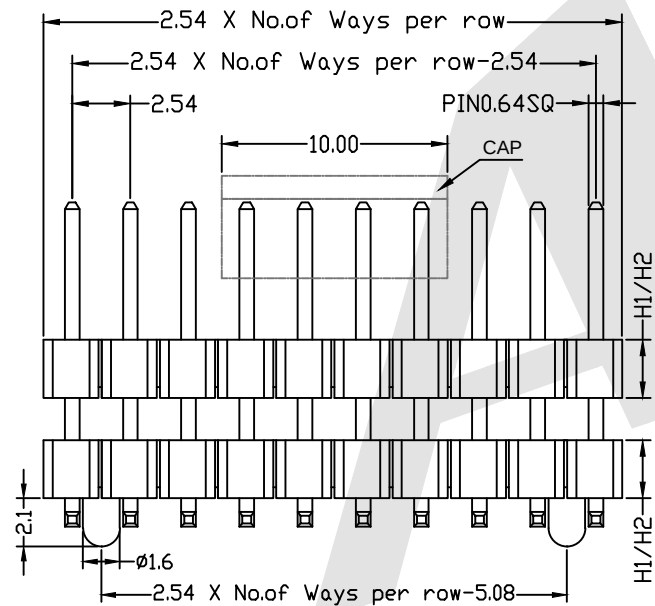



HSF

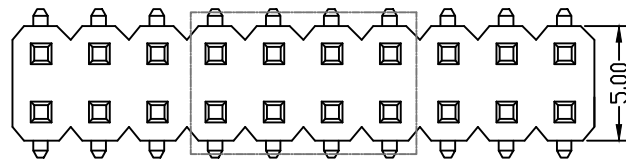

PCB LAYOUT

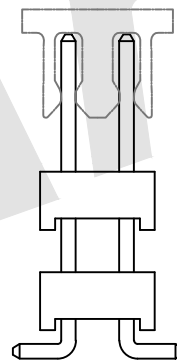

TYPE A

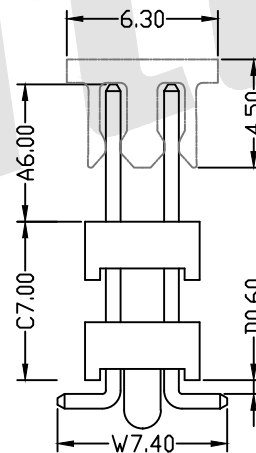

TYPE B

SPECIFICATION

Current Rating:	3Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65°C to +125°C
Contact Material:	Brass
Insulator Material:	PA6T,UL 94V-0 Black

Ordering Code:

PHEN10 - X - X - D - A-C-D-W - X - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No:
② No. of Contacts
02 To 80
③ Contact Plating:
G0: Gold flash S0: Selective
G1: 3u" Gold S1: Selective 3u"
G2: 5u" Gold S2: Selective 5u"
G3: 10u" Gold S3: Selective 10u"
G4: 15u" Gold S4: Selective 15u"
G5: 30u" Gold S5: Selective 30u"
SN: Tin
④ Connector Type
D: Dual
⑤ Pin Length:
A: 0600=6.00mm
C: 0700=7.00mm
D: 0060=0.60mm
W: 0740=7.40mm
Please mark the desired length in the A/C/D/W
⑥ Insulator Material
A: PBT
B: PA6T
C: LCP
D: PA46
E: PA9T
⑦ Packing
A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP
⑧ With locating pegs option
A: Type A without pegs
B: Type B with pegs
⑨ Plastic High
H1: 1.70mm
H2: 2.54mm
H3: 2.00mm
H4: 1.50mm


Standard IE P/N :

PHEN10-10-G0-D-0600-0700-0060-0740-B-B-A-H1

A	C	D	W
6.0	7.00	0.60	7.40

Unless Otherwise specified tolerance
X. XX: ±0.20
X. X: ±0.25 X. XXX: ±0.15
X. XX: ±0.20
X. X: ±0.25 X. XXX: ±0.15

Optional	SCALE: As Shown	UNIT: mm
	DRAW YG ZHONG	DATE 01/05/2016
	CHECK BobYang	DATE 01/05/2016



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: 2.54mm Pin Header Dual Row
Double Plastic SMT Type

DRAWING NO: PHEN10-XXD-0600-0700-0060-0740-XXXX

PRODUCT NO: PHEN10-XXD-0600-0700-0060-0740-XXXX

ADD H4=1.5MM

Increase packing method and material

REV

DESCRIPTION

DATE