

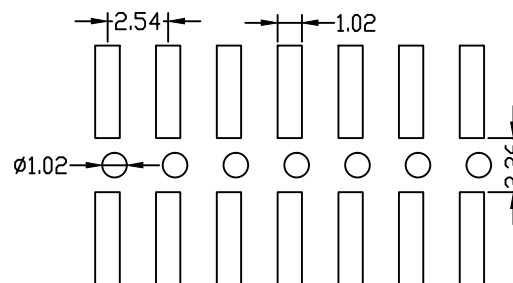
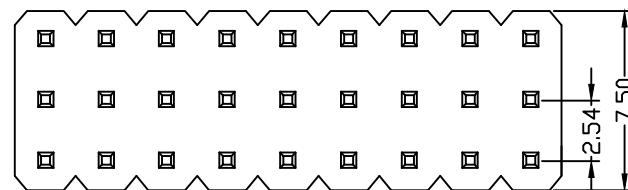


HSF

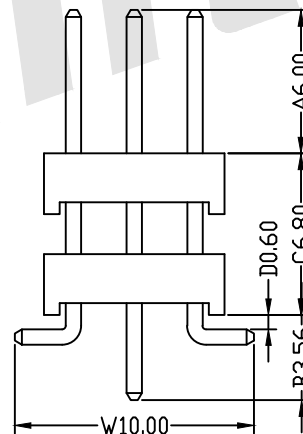

PCB LAYOUT

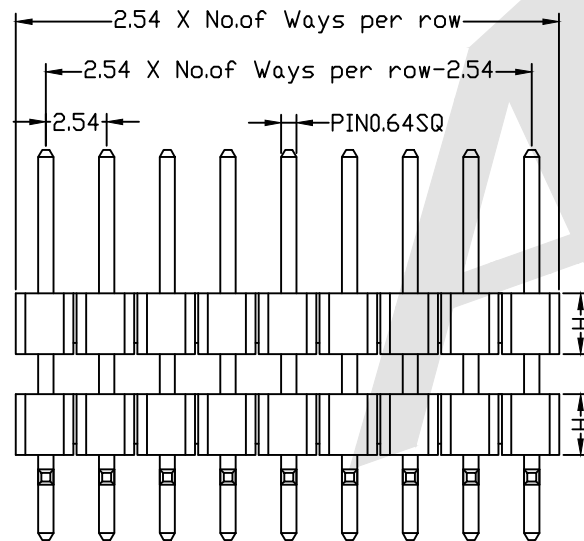

SPECIFICATION

Current Rating: 3Amp
Insulation Resistance: 1000M ohms min
Contact Resistance: 20M ohms max
Dielectric Withstanding: AC500V
Operating Temperature: -65°C to +125°C
Contact Material: Brass
Insulator Material: PA6T, UL 94V-0 Black

Ordering Code:

PHEM12 - X - X - T - A-C-D-B-W - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No:

② No. of Contacts
03 To 120

③ Contact Plating:

G0: Gold flash S0: Selective
G1: 3u" Gold S1: Selective 3u"
G2: 5u" Gold S2: Selective 5u"
G3: 10u" Gold S3: Selective 10u"
G4: 15u" Gold S4: Selective 15u"
G5: 30u" Gold S5: Selective 30u"
SN: Tin

④ Connector Type
T: Three

⑤ Pin Length:

A: 0600=6.00mm
C: 0680=6.80mm
D: 0060=0.60mm
B: 0356=3.56mm
W: 1000=10.00mm

Please mark the desired length
in the A/C/D/B/W

⑥ Insulator Material

A: PBT
B: PA6T
C: LCP
D: PA46
E: PA9T

⑦ Packing:

A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP

⑧ Plastic High

H1: 1.70mm
H2: 2.54mm
H3: 2.00mm
H4: 1.50mm

Standard IE P/N :

PHEM12-10-G0-T-0600-0680-0060-0356-1000-B-B-H2

A	C	D	B	W
6.0	6.8	0.6	3.56	10

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

Optional

SCALE:
As ShownUNIT:
mmDRAW
Mo Guo XuanDATE
11/12/2018CHECK
BobYangDATE
11/12/2018

ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE: 2.54mm Pin Header Three Row
Dual Plastic SMT Type

DRAWING NO: PHEM12-XXT-0600-0680-0060-0356-1000-XXX

PRODUCT NO: PHEM12-XXT-0600-0680-0060-0356-1000-XXX

REV

DESCRIPTION

DATE