
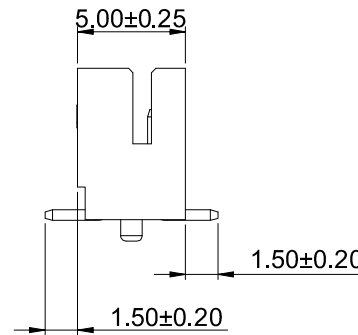
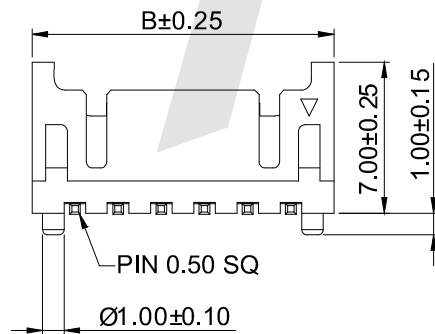
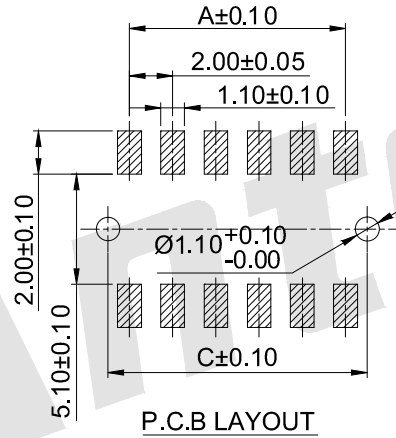
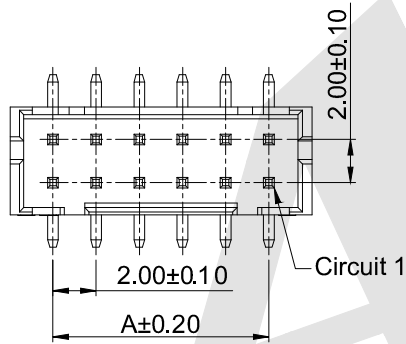


HSF



SPECIFICATIONS

- Voltage Rating: 250V AC, DC
- Current Rating: 2A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation Resistance: 1000MΩ Min
- Contact Resistance: 30mΩ Max
- Temperature Range: -40°C~+105°C

WAFER

- Part NO: AW2006VA-S-F-2xNP
- Material: Pin: Brass/Tin Over Nickel
Insulator: Nylon 6T, UL94V-0
- Mates with: AH2006 Dual Row Series Housing
- Color: Ivory


Ordering Information & Dimensions:

Poles	Part No.	Dimensions (mm)		
		A	B	C
4	AW2006VA-S-F-2x02P	2.00	6.00	4.00
6	AW2006VA-S-F-2x03P	4.00	8.00	6.00
8	AW2006VA-S-F-2x04P	6.00	10.00	8.00
10	AW2006VA-S-F-2x05P	8.00	12.00	10.00
12	AW2006VA-S-F-2x06P	10.00	14.00	12.00
14	AW2006VA-S-F-2x07P	12.00	16.00	14.00
16	AW2006VA-S-F-2x08P	14.00	18.00	16.00
18	AW2006VA-S-F-2x09P	16.00	20.00	18.00
20	AW2006VA-S-F-2x10P	18.00	22.00	20.00
22	AW2006VA-S-F-2x11P	20.00	24.00	22.00
24	AW2006VA-S-F-2x12P	22.00	26.00	24.00
26	AW2006VA-S-F-2x13P	24.00	28.00	26.00
28	AW2006VA-S-F-2x14P	26.00	30.00	28.00
30	AW2006VA-S-F-2x15P	28.00	32.00	30.00
32	AW2006VA-S-F-2x16P	30.00	34.00	32.00
34	AW2006VA-S-F-2x17P	32.00	36.00	34.00
36	AW2006VA-S-F-2x18P	34.00	38.00	36.00
38	AW2006VA-S-F-2x19P	36.00	40.00	38.00
40	AW2006VA-S-F-2x20P	38.00	42.00	40.00

Unit: mm

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
 DRAW Jack Bao DATE 10/24/2017
 CHECK Bob Yang DATE 10/24/2017



3rd ANGLE PROJECTION

Antenk ANTENK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail: sales@antenk.com

TITLE: 2.00mm Pitch 180° Dual Row Wafer With Boss-SMT TYPE Connector Series

DRAWING NO: AW2006VA-S-F-2xNP

PRODUCT NO: AW2006VA-S-F-2xNP

△ Change AW2009VA-S-F-2xNP to AW2006VA-S-F-2xNP

06/24/2021

REV DESCRIPTION

DATE