

HSF



SPECIFICATIONS

- Voltage rating: 150V AC/DC
- Current rating: 1A AC,DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 500MΩ min
- Temperature range: -40°C~+105°C






WAFER

- Part NO: AW1256R-S-xP
- Material: Pin: Brass/Gold over Nickel  
Solder Tabs: Brass/Tin over Nickel  
Insulator: Nylon 6T, UL94V-0
- Mates with: AH1256 series Housing
- Color: White

Ordering Information & Dimensions:

Poles	Part No.	Dimensions (mm)		
		A	B	C
02	AW1256R-S-02P	1.25	6.10	4.01
03	AW1256R-S-03P	2.50	7.35	5.26
04	AW1256R-S-04P	3.75	8.60	6.51
05	AW1256R-S-05P	5.00	9.85	7.76
06	AW1256R-S-06P	6.25	11.10	9.01
08	AW1256R-S-08P	8.75	13.60	11.51
10	AW1256R-S-10P	11.25	16.10	14.01
15	AW1256R-S-15P	17.50	22.35	20.26
20	AW1256R-S-20P	23.75	28.60	26.51
25	AW1256R-S-25P	30.00	34.85	32.76
30	AW1256R-S-30P	36.25	41.10	39.01

Unit:mm

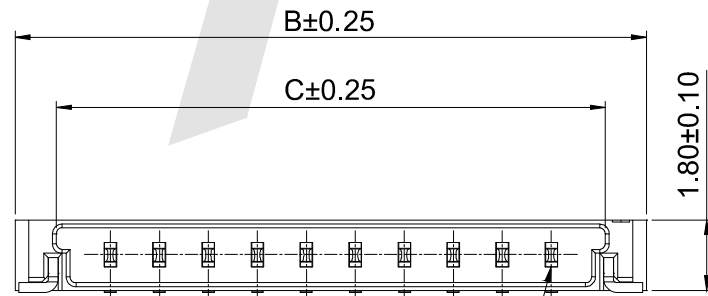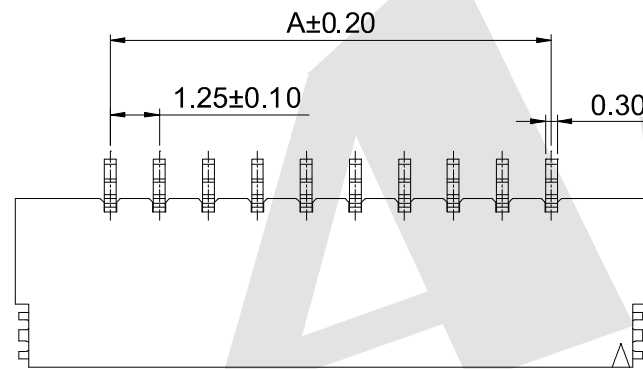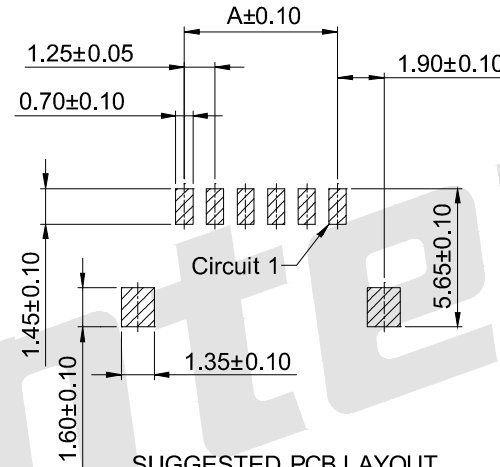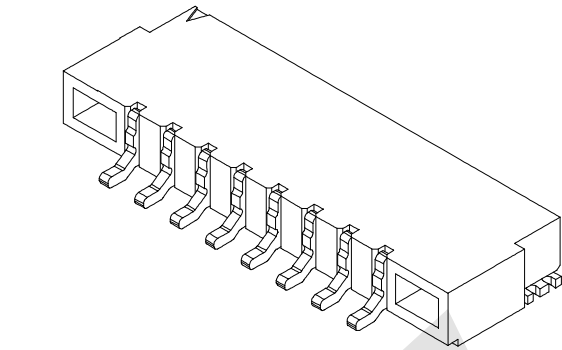

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15


SCALE: As Shown	UNIT: mm
DRAW Jack Bao	DATE 11/04/2017
CHECK Bob Yang	DATE 11/04/2017

**Antenk**® ANTENK ELECTRONICS CO., LTD  
[Http://www.antenk.com](http://www.antenk.com)  
 E-mail:sales@antenk.com

TITLE: 1.25mm pitch 90° Wafer-SMT Connector Series

DRAWING NO: AW1256R-S-xP

PRODUCT NO: AW1256R-S-xP



REV	DESCRIPTION	DATE