

HSF






	2 Pin	3 Pin	4 Pin	5 Pin	6 Pin	7 Pin	8 Pin
A-CODE							
B-CODE							
D-CODE							

Order Code:


M1202 - X - XP - F - 005
 ① ② ③ ④ ⑤

- ① Type of M series: M1202
- ② Code Option: A B D
- ③ NO. of PINS: 02~08
- ④ Gender option: Female
- ⑤ Series number: 005

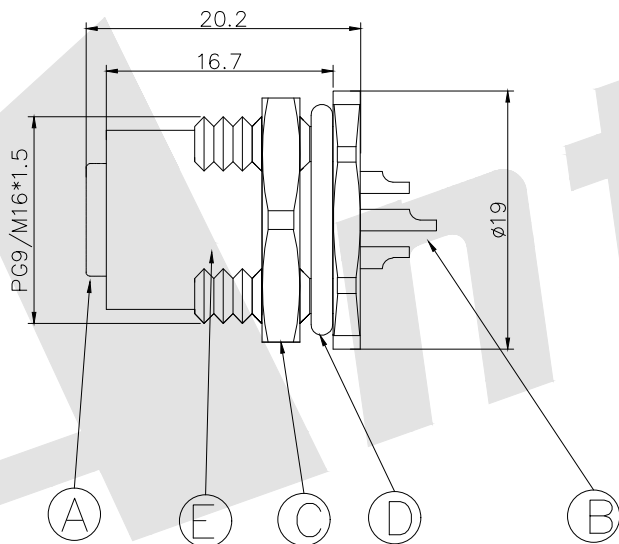


Recommended Panel

Cut-out M16



PG9 Ø15.4



Engagement force	≤30N	Rated voltage	2-5pin: 60v DC 6-8pin: 30V DC
Isengagement force	≥5N	Rated current	2-5pin: 4A 6-8pin: 2A
echanical lifespan	≥500	Insulation resistance	≥1000 MΩ
IP rating	IP67/IP68	Contance resistance	≤10mΩ
Flammability	UL94 v-0	Operation Temperature	-40 T0+105℃

E	Over Mold	1	NICKL PLATED BRASS
D	O RING	1	SILIGONE RED
C	NUT	1	NICKL PLATED BRASS
B	Female PIN	/	PHOSPHOR BRONZE GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+GF BLACK
Item	PART NAME	QTY	MATERIAL /FINISH

Unless Otherwise specified tolerance
 X.±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15


SCALE: As Shown	UNIT: mm
DRAW ZLA	DATE 24/05/2022
CHECK BobYang	DATE 24/05/2022

Antenk ANTENK ELECTRONICS CO.,LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE: M12 2~8P Female Waterproof Wire Side Lock Front Panel PG9 M16 SW17T

DRAWING NO: M1202-X-XP-F-005

PRODUCT NO: M1202-X-XP-F-005



REV	DESCRIPTION			DATE