

HSF



RoHS

SPECIFICATION

Material:

- 1. Housing:Thermdo Plastic Glass-Filled, UL94V-0
- Contacts:Phsphor Bronze
- 2. Dimension Of Mating and Termination
- Mating Termination
- Length/Width*Thickness Length
- K:5.3/0.4~0.50*0.4~0.36 13.0
- 3. Finish
- 30U" (0.75UM)Gold Plating on Contact Area Tin-Plated
- On Tail Under Plating Nickel Allover

Ordering Code:

HM M 55 S C 02

①②③④⑤⑥

- ① Series No:
2.00mm Hard Metric
- ② Contact Type:
M:Male
- ③ Contact Quantity:
55:5*11P
- ④ Assemble Type:
S:Straight
- ⑤ Product Type:
C:C Type
- ⑥ Product NO:
02

Standard IE P/N :

HMM55SC02

Unless Otherwise specified tolerance
X. ±0.35 X.XX:±0.20
X.X:±0.25 X.XXX:±0.15




ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com



SCALE:
As Shown UNIT:
mm
DRAW
Wu Feng Rong DATE
08/11/2021
CHECK
BobYang DATE
08/11/2021

TITLE:
2.00mm Hard Metric Male Straight
Dip 5X11P C Type With Post





DRAWING NO: HMM55SC02
PRODUCT NO: HMM55SC02




3rd ANGLE PROJECTION

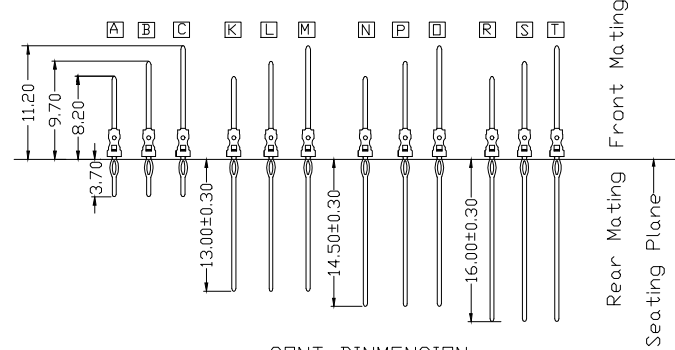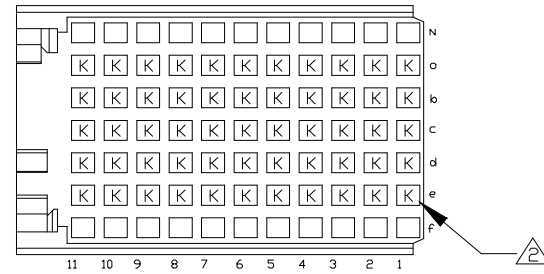

CONT DIMENSION

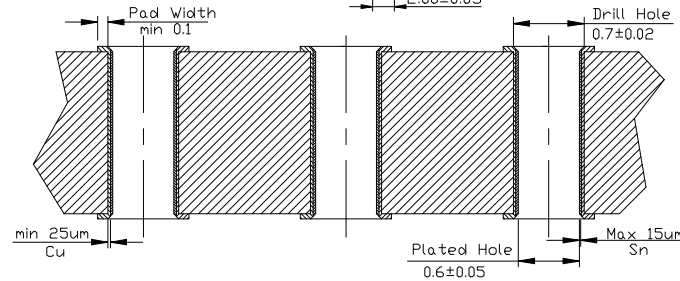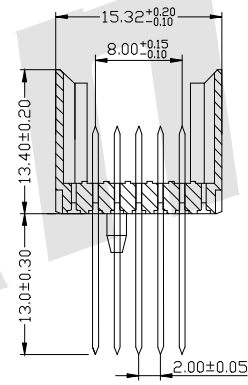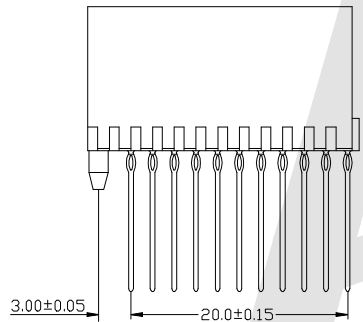

RECOMMENDED HOLE SPECIFICATIONS
SECTION A-A SCALE 20:1

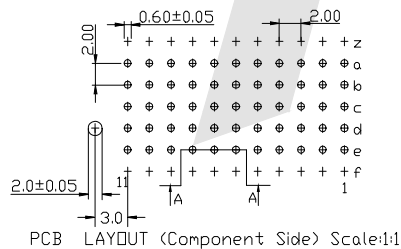

PCB LAYOUT (Component Side) Scale:1:1

REV	DESCRIPTION	DATE
