

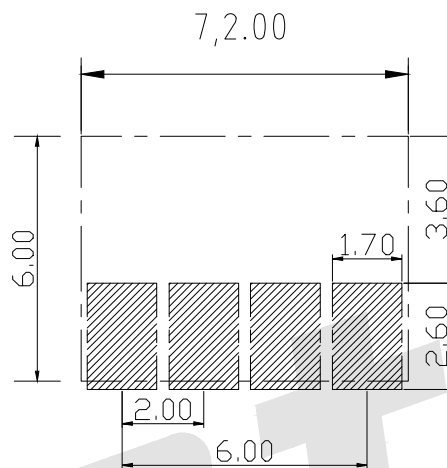
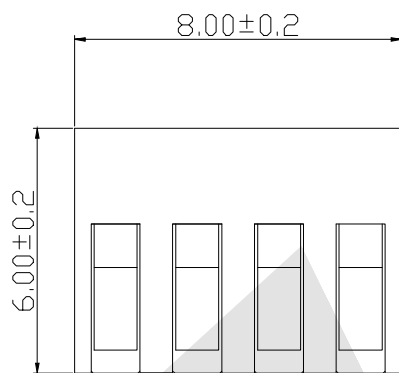


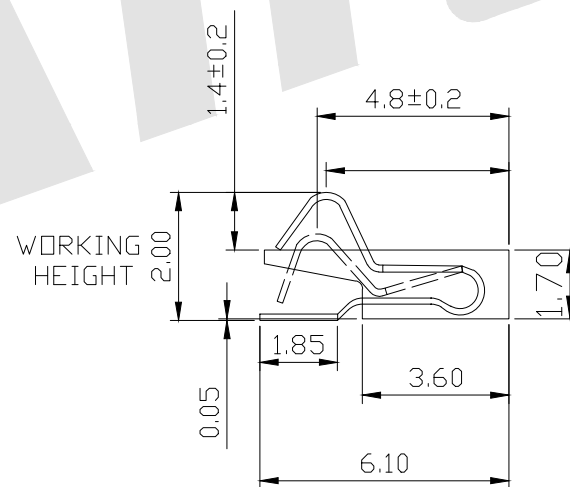

PCB LAYOUT

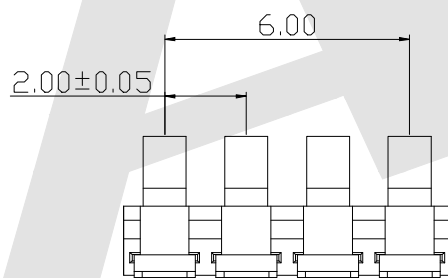

NOTES

1. MATERIAL:

A.Terminal:Phosphor Copper Gold Plated.

B.Housing: LCP

2. ELECTRICAL SPECIFICATIONS:

VOLTAGE RATING:50V

CURRENT RATING:0.5A

DIELECTRIC STRENGTH:500 VAC FOR 1 MINUTE MIN

INSULATION RESISTANCE:500 MEG OHM MIN

CONTACT RESISTANCE:30 MILL.OHM MAX

OPERATION TEMPERATURE:-20° C TO +85° C

PRODUCT WITHSTANDING REFLOW SOLDERING 260° FOR 10S

Ordering Code:

ABT25 - 04 - L - A - X - D

① ② ③ ④ ⑤ ⑥

① Series No: ⑤ Contact Plating:

② No. of Contacts G0:Gold flash

03:03Pin G1:3u" gold

G2: 5u" gold

③ Insulator Material: G3:10u" gold

P:PBT+30%GF G4:15u" gold

L:LCP G5:30u" gold

Pitch

④ A:2.0mm Pitch ⑥ Packing:

A:Tray

B:Bag

C:Tube

D:Tape Reel


Unless Otherwise specified tolerance

X.±0.35 X.XX:±0.20
X.X:±0.25 X.XXX:±0.15

SCALE: UNIT:
As Shown mm

DRAW DATE
Wu Feng Rong 10/03/2020

CHECK DATE
BobYang 22/03/2018



ANTENK ELECTRONICS CO.,LTD

Http://www.antenk.com

E-mail:sales@antenk.com

TITLE:

2.0mm Pitch 4P Battery Connector

DRAWING NO: ABT25-04LAXD

PRODUCT NO: ABT25-04LAXD



DESCRIPTION

03/09/2021

DESCRIPTION

DATE

REV

1

2

3

4

5

6

7

8