






HSF

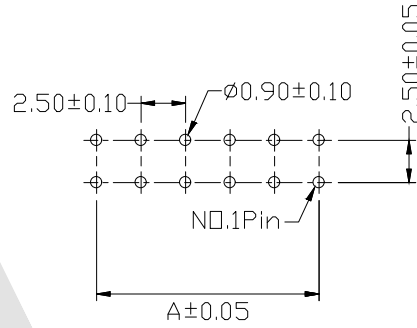

ROHS



P.C.B. LAYOUT

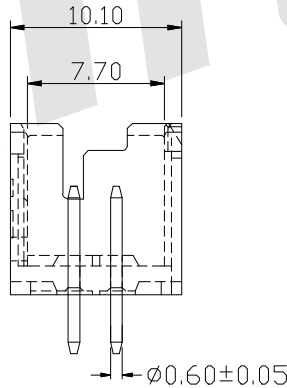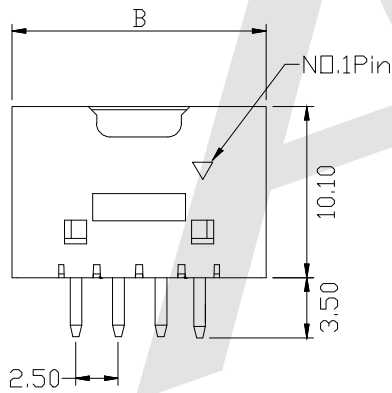

Specifications:  
 Part No.: AW2508V-F-2xXP  
 Voltage rating: 250V AC/DC  
 Current rating: 3A AC/DC  
 Withstanding voltage: 1000V AC/minute  
 Temperature range: -25°C ~ +85°C  
 Insulation resistance: ≥ 1000MΩ  
 Contact resistance: ≤ 10mΩ  
 After environmental testing: ≤ 20mΩ  
 Material: Brass (PIN), Pa66 (Housing)  
 Qty/Bag: 1000Pcs


Ordering information:  
 AW2508V-F-2xXP - XX - 01  
 1 2 3

1. Part No.  
 2. Color:  
 (blank)-Ivory  
 BK-Black BR-Brown  
 RD-Red GY-Gray  
 BL-Blue PK-Pink  
 YL-Yellow LY-Lemon yellow  
 GN-Green P-Purple  
 OR-Orange LE-Light Blue  
 WH-White FY-Vivid yellow  
 3. Series No.

Poles	Dimensions (mm)		
	A	B	C
08	7.50	15.00	11.10
10	10.00	17.50	13.60
12	12.50	20.00	16.10
14	15.00	22.50	18.60
16	17.50	25.00	21.10
18	20.00	27.50	23.60
20	22.50	30.00	26.10
22	25.00	32.50	28.60
24	27.00	35.00	31.10
26	30.00	37.50	33.60
30	35.00	42.50	36.10
32	37.50	45.00	38.60
34	40.00	47.50	41.10
36	42.50	50.00	43.60
40	47.50	55.00	46.10

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm  
 DRAW ZLA DATE 20/04/2022  
 CHECK BobYang DATE 20/04/2022



**Antenk** ANTENK ELECTRONICS CO., LTD  
 Http://www.antenk.com  
 E-mail: sales@antenk.com

TITLE:  
 2.5mm Pitch Female Dual row Wafer  
 Connector

DRAWING NO: AW2508V-F-2xXP-XX-01

PRODUCT NO: AW2508V-F-2xXP-XX-01

REV DESCRIPTION

DATE

1 2 3 4 5 6 7 8