


HSF



成品组装图:  
(Assemble)



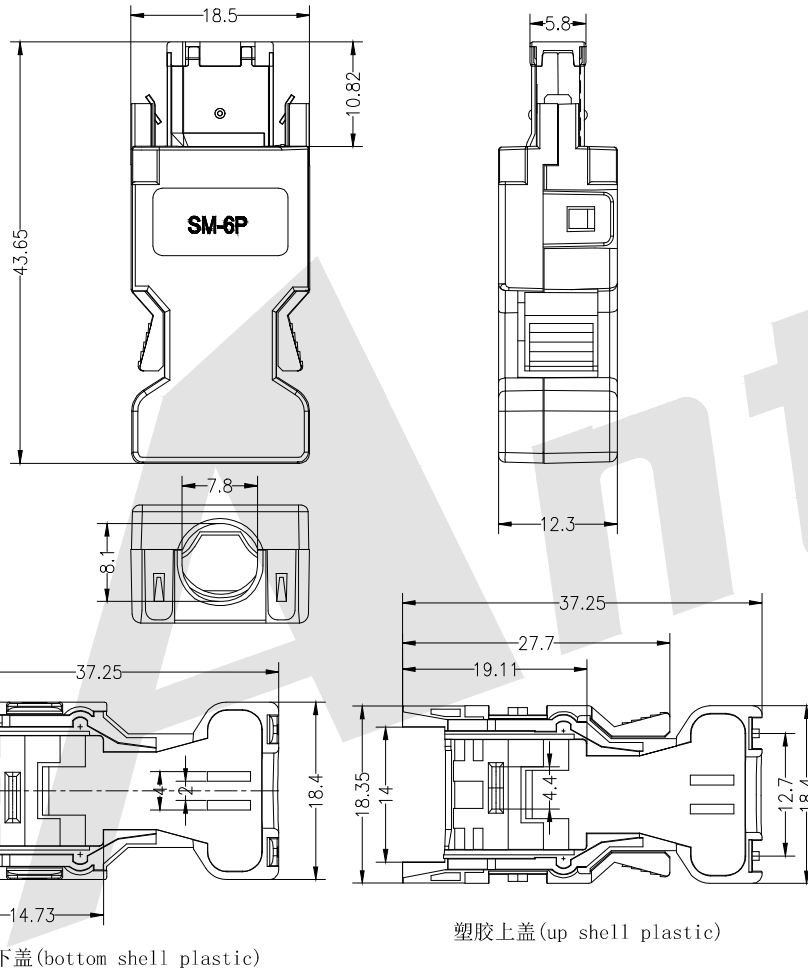


SPECIFICATIONS  
 Rated Current:1.0Amp  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C  
 Contact Material:Phosphor Bronze  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

Ordering Code

IEMS02 - X - X - X - X - X  
 ① ② ③ ④ ⑤ ⑥

- ① Series No:
- ② Shell Material:  
B:Brass I:Iron  
S:stainless steel
- ③ Insulator Material:  
P:PBT+30%GF  
L:LCP
- ④ Contact Material:  
B:Brass  
P:phosphor copper
- ⑤ Contact Plating:  
G0: Gold flash  
G1: 3u" Gold  
G2: 5u" Gold  
G3: 10u" Gold  
G4: 15u" Gold  
G5: 30u" Gold
- ⑥ Packing:  
A:Tray  
B:Bag  
C:Tube  
D:Tape Reel



Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm  
 DRAW ZLA DATE 25/04/2022  
 CHECK BobYang DATE 25/04/2022

**Antenk** ANTEK ELECTRONICS CO., LTD  
 Http://www.antenk.com  
 E-mail:sales@antenk.com

TITLE:  
 IEEE1394 SMT Male 6P with shell  
 DRAWING NO: IEMS02-X-X-X-X-X  
 PRODUCT NO: IEMS02-X-X-X-X-X

| REV | DESCRIPTION | DATE |
|-----|-------------|------|
| 1   |             |      |
| 2   |             |      |
| 3   |             |      |
| 4   |             |      |
| 5   |             |      |

