HSF

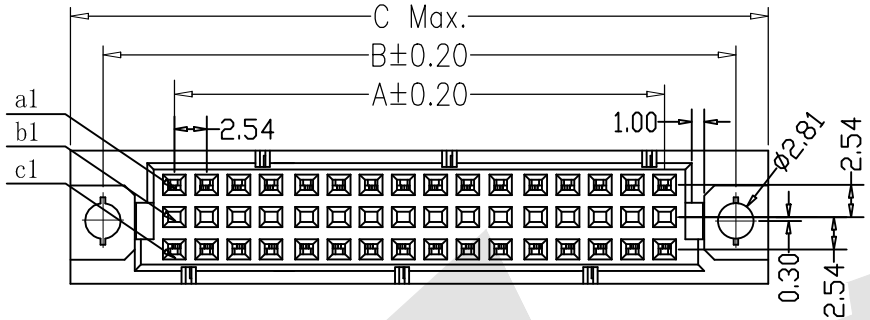

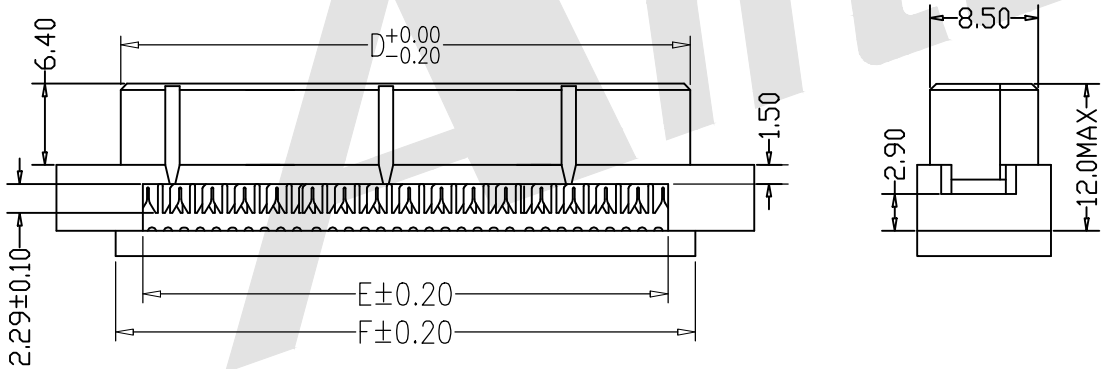

SPECIFICATION

Current Rating:	3.0Amp
Insulation Resistance:	1000MΩ min.
Contact Resistance:	30MΩ max
Withstand Voltage:	AC 1000V For 1 Minute
Operating Temperature:	-55° C to +105° C
Contact Material:	Brass
Contact Plating:	Au or Sn Over Ni
Insulator Material:	PBT+30%GF UL 94V-0

Ordering Code:

DID - XX - X - X - X - 3R
① ② ③ ④ ⑤ ⑥

① Series No:

② No. of Contacts
16P 32P 64P

③ Rows Loaded With Contacts
A:Row a
K:Row a+d
D:Row a+c

④ Plastic length
1:3x16p
2:3x32p

⑤ Contact Plating
G0: Gold flash
S0: Gold flash/Ni
G1: 3u" Gold
S1: 3u" Gold/Ni
G2: 5u" Gold
S2: 5u" Gold/Ni
G3: 10u" Gold
S3: 10u" Gold/Ni
G4: 15u" Gold
S4: 15u" Gold/Ni
G5: 30u" Gold
S5: 30u" Gold/Ni
SN: Tin

⑥ Series number
3R

	No.of Pins	A	B	C	D	E	F
1	3X16P	38.10	49.90	55.00	44.40	41.00	44.00
2	3X32P	78.74	90.00	95.10	85.00	81.50	85.80

REV	DESCRIPTION	DATE

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown | UNIT: mm
DRAW: Gong Feng | DATE: 15/01/2018
CHECK: BobYang | DATE: 15/01/2018

3rd ANGLE PROJECTION

ANTENK ELECTRONICS CO,.LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: DIN41612 Vertical Female Type IDC Connectors 3Row

DRAWING NO: DID-XX-XXX-3R
PRODUCT NO: DID-XX-XXX-3R